

FARM-FLEET



2016 CATALOGUE

COMMERCIAL
CONSTRUCTION
AGRICULTURE

LANDSCAPING
ROCK EQUIPMENT
FORESTRY

INDEX

- Aerators 40, 43, 76, 77, 78
ATV Box Scrapers . . . 106
ATV Carts 68-70
ATV Discs 104-105
ATV Land Plane 105
ATV Landscape Rake 106
ATV Scraper Blades . 106
ATV Seeder . 85-86, 90-92
ATV Snow Plow 48
ATV Spreader 82-92
Bale Forks & Spears
. 134-138
Box Scrapers . . . 51, 54-61
Brooms 162-163
Canopies 156-157
Carts 68-70
Cement Mixers 67
Chain Harrows 107
Core Aerators . 43, 76, 77
De-Thatcher 71, 76
Discs (also see ATV Discs)
. 150-155
Disc Harrows . . . 150-153
Engine Driven Mowers . .
. 19-20
Engine Driven Cutters . 6-7
Engine Driven Tillers . . 32
Estate Sprayers . . . 98-102
Fertilizer Spreaders . 81-97
Finishing Mowers . . 19-27
Flail Mowers 28-31
Flex Mowers 25-27
Foam Markers 103
Furrower 141, 148
Grader Blade . . . 146-147
Grapples
. 122-125, 128, 129
Harrows 107
Hay Handling 134-140
Hay Rakes 132-133
Hydraulic Top Link . . . 159
Land Plane . . 61, 62, 105
Landscape Rakes
. 64-66, 106
Lawn Rollers . . . 76, 79-80
Lawn Sweepers 72-74
Lawn Vac 75
Log Splitters 116-120
Logging Winches . 114-115
Manure Forks 129
Mixers (Cement) 67
Moldboard Plow 142
Mowers 6-31
Offset Discs 151-155
Overseeder 40-41
Packers 143
Pallet Forks 130-131
Poly Spreader 94-95
Post Drivers 146-147
Post Hole Diggers 144-145
Potato Planter/Hiller/Digger
. 141
Powered Landscape Rake
. 64-65
Pulverizers 42
Quick Attach Brackets . . .
. 125, 160-161
Quick Hitches 3 Pt. . . 159
Rakes (Hay) 132-133
Rakes (Landscape)
. 64-66, 106
Rakes (Rock) . 64-66, 109
Rippers 148-149
Rock Buckets . . . 126-127

INDEX



Rock Rakes . . . 64-65, 109
Rollers 76, 79-80
Rotary Broom . . . 162-163
Rotary Cutters 6-14
Rotary Tillers 32-38
Scraper Blades
. 44-47, 63, 106
Sickle Bar Mowers. . 16-17
Skid Steer - Adaptor
. 125, 160-161
Skid Steer - Cement Mixer
. 67
Skid Steer -Grader Blade
. 63
Skid Steer - Power Rake.
. 64-65
Skid Steer - Rotary Brooms
. 162
SmartLink system 76
Snow Blades 48-55
Snow plow 48-55
Spiker / Aerator
. 43, 76-78, 80
Spray Foam Markers. 103
Sprayers 98-102
Spreaders 81-97
Stone Forks 126-127
String Trimmer 18
Stump Grinder 121
Sub-Soilers 148-149
Sweepers 72-74
Tillers 32-38
Tractor Canopies. 156-157
Tree Saw 112-113
Tree Shears 110-111
Vacuums 75
Winches 114-115
Woodsplitter 116-120

Aerators 76-78
Carts 68, 70
Core Aerators 77
De-Thatcher 71
Fertilizer Spreaders
. 82-84, 87
Lawn Rollers 76, 79
Lawn Sweepers 73-74
Lawn Vac 75
Logsplitter 116-117
Rollers 76, 79
Smart Link -Attachments
. 76
Snow Plows 48
Spike Aerators 78
Spreaders 82-84, 87
Sweepers 73-74
Tillers 32
Tractor Carts 68, 70
Vacuums 75

**INDEX CONTINUED
ON NEXT PAGE.....**



We reserve the right to correct printing errors, limit quantities or make merchandise substitutions. Pictures are representative only and may vary from actual product. Prices subject to change without notice. Prices maybe subject to additional freight & set-up charges. Not all products stocked at all locations. F.O.B. St. Marys, Ontario unless otherwise stated.

TABLE OF CONTENTS



www.amazone.de

Spreaders 96-97

BARE-Co

www.bare-co.com

Tractor Canopies 156-157



www.befco.com

Aerator/Overseeder Green Rite . 40

Baby Hop Ground Driven 92

Core Aerators 40,43

Finishing Mowers

Engine Driven Finish Mower . . 20

C30 Series 22

C50 Series 23

C70 Series 24

Flex Mowers 25-27

Flail Mowers

H40 Series, Hurricane 28

H70 Series, Hurricane 29

H80 Series, Hurricane 30

Flail Shredder 31

Hay rakes 133

Overseeders 40-41

Rotary Tillers

T30 Series 34

T40 Series 35

T50 Series 36

T60 Series 37

T70 Series 38

Sickle Bar Mower 17

Soil Pulverizers 42

Spreaders 92-93, 95

Turbo Hop Spreader 95



www.brownmanufacturing.com

Rotary Cutters HD 10, 12

Rotary Cutters Tree Cutter 14

Tree Saw 112-113



Sickle Bar Mower 16



www.fimcoindustries.com

Carts 68-69

Sprayers 98-102

ATV Spreader 86

Spreaders - Broadcast 86, 89



www.fransgard.dk

Accessories - Winch 115

Logging Winches 114

Rake, Hay 132

Rotary Cutter Chain Mulcher . . . 13

Hackett Harrows

Chain Harrows 107



www.shoule.com

Grapple Rake 125

Tree Shears 110-111

Rock Buckets 126-127

Rock Rakes 109



Snow Plow 50

Snow Pusher 51



ROTOMEC

Rotary Tillers 33



Finishing Mower 19

Rotary Cutter 6-7

Spreader 85

String Trimmer 18

TABLE OF CONTENTS



Snow Plow	50
Snow Pusher	51



Logsplitters	118-120
--------------------	---------



Box Scrapers	56
Landscape Rake	66
Plow	142
Rotary Cutters	8-9, 11
Scraper Blades	44-45

TrailLine

Spray Foam Markers	95
--------------------------	----



www.monroetufline.com

42 Series Discs	154-155
ATV	
Box Scrapers	106
Discs Harrows	104-105
Land Plane	105
Landscape Rake	106
Scraper Blade	106
3 Pt. Box Scraper	57-61
Pull Type Box Scraper	61
Land Plane	62
Offset Discs	154-155
Packers 3 Pt.	143
Scraper Blades	46
Sub-Soilers	149
THE Series	150
TLO Series	151
TW6 Series	152-153



www.worksaver.com

ATV Seeder Spreader	90
Bale Forks & Spears	134-138
Cement Mixers	67
Euro to Skid Steer Adaptor	161
Grader Blade	63
Grapples	122-124, 128
Hay Handling Attachments	139, 140
Hydraulic Top Link	159
Landscape Rakes	66
Manure Forks	129
Pallet Forks	130-131
Post Drivers 3Pt. & Skid Steer	146-147
Powered Landscape Rake	64-65
Post Hole Diggers	144-145
Quick Hitches 3 Pt.	159
Rippers Single Shank	148
Rotary Broom	162-163
Snow Blades	52
Snow Pusher	54-55
Stump Grinder	121
Weld On Euro/global ALO Quick Attach	160,161



Core Aerators	77
Lawn Sweepers	72
Spiker Seeder/Spreader	88
Sweepers	72
Roller/Spiker	80

FARM-FLEET INC.

We reserve the right to correct printing errors, limit quantities or make merchandise substitutions. Pictures are representative only and may vary from actual product. Prices subject to change without notice. Prices maybe subject to additional freight & set-up charges. Not all products stocked at all locations. F.O.B. St. Marys, Ontario unless otherwise stated.

ROTARY CUTTER

Engine Driven

Walk Behind

SWISHER®

The SWISHER walk behind Trailcutter mower is perfect for cutting trails through the woods and clearing fields and ditches. It will clear the densest undergrowth and saplings up to 1-1/2" in diameter. This self-propelled walk-behind features a 11-1/2 HP Briggs & Stratton Engine and a heavy duty fabricated deck. It's single, fixed hardened steel blade cuts through brush and saplings with ease. The blade is enclosed for maximum safety. Front and side safety deflectors protect against flying debris. Handlebar mounted controls are easily accessed for total control and safety. Proper safety attire and eye protection should be used. Large chevron tread pneumatic tires roll easily over the roughest terrain for cruising and the reverse gear is handy for easy backing up.

- * **24" Cutting Width**
- * **11.5 HP B&S Engine**
- * **Manual recoil start**
- * **4 Speed transmission with neutral & reverse**
- * **Tires two 4.80 x 8 pneumatic tires**
- * **One H.D. hardened steel fixed blade**
- * **Up to 1-1/2" sapling cutting diameter**
- * **Cutting height, Variable**
- * **.7 US gallon fuel capacity**
- * **Handlebar drive controls**
- * **Handlebar manual PTO clutch**
- * **Proper Safety Attire is recommended**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
WBRC11524BS	11.5 HP, 24" walk behind Rotary Cutter	288 lbs.	\$2999

ROTARY CUTTER

Engine Driven

Pull Type



SWISHER rough cut Trailcutter is perfect for any big mowing job. Backed by the power of 60 + years of design experience, this mower is designed to dramatically reduce mowing time. The SWISHER Trailcutter easily attaches to your ATV, UTV or lawn tractor. These models will cut saplings up to 3" in diameter and thick brush with two heavy duty swinging blades. A convenient single point cutting height adjustment with a 4" range on 44" model and 2.5" - 7" on 52" model. The remote control operator console on the 52" model lets you safely engage and disengage the mower blades from your ATV or tractor seat.

- * Offsets, left/right/center articulating
- * Two 4.00 x 8" pneumatic tires with sealant on 44"
- * Four 13x5x6 puncture resistant semi-pneumatic tires on 52"
- * Two H.D. hardened steel swinging blades
- * Up to 3" sapling cutting diameter
- * 2.5 US gallon fuel capacity
- * 44" clevis/pin type hitch
- * 52" 2" trailer hitch ball coupler
- * 12V electric start
- * 44" manual PTO Clutch
- * 52" electric PTO Clutch
- * Remote Operator Control Console
- * 12V battery EXTRA (not included)

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
RC14544BS	44", 14.5 HP B&S engine Electric start, 2 wheel	400 lbs.	\$3629
RC17552BS	52", 17.5 HP B&S engine Electric start, 4 wheel	587 lbs.	\$5279

ROTARY CUTTERS

3 Pt. PTO

1100 Series



These affordable rotary cutters built by TITAN Implement are ideal for the cutting of grass, weeds and light brush up to 1" diameter. These units feature a 12 ga. deck, CAT. I - 3 Pt. Hitch, and 540 RPM shear pin PTO. Manufactured in U.S.A.

- * Cat I, 3 Pt hitch
- * Series 4 Shear pin PTO shaft with PTO shielding
- * 1/4" round formed steel blade carrier (stump jumper)
- * Single 4" x 15" solid laminated rubber tire
- * Regreaseable cast wheel hub
- * 55 HP rated gear box
- * 12 ga. Steel deck with 7" high sides
- * 1" cutting capacity
- * Optional safety guard chains available

MODEL	MAXIMUM PTO HP	CUTTING WIDTH	WEIGHT	LIST PRICE
1104	45 HP	48" / 4'	524 lbs.	\$1399
1105	45 HP	60" / 5'	584 lbs.	\$1449
1106	65 HP	72" / 6'	712 lbs.	\$1869

The manufacturer highly recommends the use of optional safety guard chains.

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
CG1104	48" / 4' Safety guard chain kit	\$399
CG1105	60" / 5' Safety guard chain kit	\$475
CG1106	72" / 6' Safety guard chain kit	\$515

ROTARY CUTTERS

3 Pt. PTO

1400 Series

Medium Duty



Unit shown with optional safety chains

These affordable rotary cutters built by TITAN Implement are ideal for the cutting of grass, weeds and light brush up to 2" diameter. These units feature a 11 ga. deck, CAT. I - 3 Pt. Hitch, and 540 RPM PTO with slip clutch. Manufactured in U.S.A.

- * Cat I, 3 Pt hitch
- * Series 4 Slip clutch PTO shaft with PTO shielding
- * 1/4" round formed steel blade carrier (stump jumper)
- * Single 4" x 15" solid laminated rubber tire
- * Regreaseable cast wheel hub
- * 100 HP rated gear box
- * 11 ga. Steel deck with 7" high sides
- * Flat bar and formed channel deck reinforcing
- * 2" cutting capacity
- * Optional safety guard chains available

MODEL	MAXIMUM PTO HP	CUTTING WIDTH	WEIGHT	LIST PRICE
1405SC	90 HP	60" / 5'	689 lbs.	\$2099
1406SC	90 HP	72" / 6'	820 lbs.	\$2479

The manufacturer highly recommends the use of optional safety guard chains.

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
CG1105	60" / 5' Safety chain guard kit	\$475
CG1106	72" / 6' Safety chain guard kit	\$515

ROTARY CUTTERS

410 SERIES

HEAVY DUTY 3 Pt.



415



417

With over 50 years of innovative design and production, BROWN Mfg. has set the standard for heavy duty rotary cutters. The 410 series rotary cutter comes with a 130 HP rated gearbox, with limited 5 year warranty. Available in four sizes, 5', 6', 7' & 8' with a slip-clutch PTO Shaft. This heavy duty cutter is tough enough to cut heavy brush and trees up to 2" in diameter.

- * Deck Design, round back, reinforced
- * Deck Construction, all welded 7 gauge (3/16") steel
- * 130 HP rated gearbox, limited 5 year warranty
- * Cat. 5 Slip-clutch PTO shaft on 5' & 6' models
- * Cat. 6 - 4 Disc slip-clutch PTO shaft on 7' and 8' models
- * Laminated solid rubber tail wheels
- * 5' & 6' single tail wheel
- * 7' & 8' dual tail wheels
- * 5' & 6' Cat. I/II clevis style 3 Pt. hitch
- * 7' Cat. II, 8' Cat. II / III clevis style 3 Pt. Hitch
- * Stump Jumper 3/16" with 1" x 5" solid bar
- * 1/2" x 4" heat treated/up draft type blades
- * Replaceable slides
- * Replaceable front rubber deflector
- * Optional chain guards available

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
415	5' Rotary Cutter, Single Tail Wheel	900 lbs.	\$4175
416	6' Rotary Cutter, Single Tail Wheel	1060 lbs.	\$4899
417	7' Rotary Cutter, Dual Tail Wheel	1375 lbs.	\$7029
418	8' Rotary Cutter, Dual Tail Wheel	2096 lbs.	\$8185

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
4-007	5' Front Chain Guard	53 lbs.	\$389
232-0031	5' Rear Chain Guard	21 lbs.	\$325
4-009	6' Front Chain Guard	57 lbs.	\$415
232-0030	6' Rear Chain Guard	37 lbs.	\$349
4-011	7' Front Chain Guard	67 lbs.	\$439
232-0032	7' Rear Chain Guard	42 lbs.	\$439
232-0830	8' Front Chain Guard	84 lbs.	\$535
232-0850	8' Rear Chain Guard	57 lbs.	\$489

ROTARY CUTTERS

3 Pt. PTO

1500 Series (7')

1700 Series (8')

Medium Duty



These affordable rotary cutters built by TITAN Implement are ideal for the cutting of grass, weeds and light brush up to 2" diameter. These units feature a 10 ga. (7'), 11 ga. (8') deck, CAT. II - 3 Pt. Hitch, and 540 RPM PTO with slip clutch. Manufactured in U.S.A.

- * Cat I, 3 Pt hitch
- * Series 6 Slip clutch PTO shaft with PTO shielding on 7' model
- * Series 5 Slip clutch PTO shaft with PTO shielding on 8' model
- * 5/8" round formed steel blade carrier (stump jumper)
- * 7 ft Single wheel with 4" x 15" solid laminated rubber tire
- * 8 ft Dual wheels with 4" x 15" solid laminated rubber tire
- * Regreaseable cast wheel hub
- * 100 HP rated gear box on 7' model
- * 150 HP rated gear box on 8' model
- * 100 HP rated outboard gear box on 8' model
- * 10 ga. Steel round back deck with 7" high sides on 7' model
- * 12 ga. Steel deck with 7" high sides on 8' model
- * Flat bar and formed channel deck reinforcing
- * 2" cutting capacity
- * Optional safety guard chains available

MODEL	MAXIMUM PTO HP	CUTTING WIDTH	WEIGHT	LIST PRICE
1507	90 HP	84" / 7'	1305 lbs.	\$3779
1708	90 HP	96" / 8'	1365 lbs.	\$5429

The manufacturer highly recommends the use of optional safety guard chains.

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
CG1507	84" / 7' Safety chain guard kit	\$719
CG1708	96" / 8' Safety chain guard kit	\$845

ROTARY CUTTERS 600 SERIES HEAVY DUTY 3 Pt.



Model 684 shown with dual wheels

With over 50 years of innovative design and production, BROWN Mfg. has set the standard for heavy duty rotary cutters. The 600 series rotary cutter comes with a 145 HP rated gearbox, with limited 5 year warranty. Available in two sizes, 6' and 7' with a slip-clutch PTO Shaft, this heavy duty brush cutter is tough enough to cut heavy brush and trees up to 4" in diameter.

- * Deck Construction, all welded 1/4" thick, steel plate
- * 145 HP rated gearbox, 1:1.5 ratio
- * Available in 540 RPM & 1000 RPM
- * Cat. 8 - 4 Slip-clutch PTO shaft
- * Laminated solid rubber tail wheels 5.00 x 8
- * Available with single or dual tail wheel
- * Cat. II clevis style with flex link 3 Pt. hitch
- * 1-1/4"- 6' & 1"- 7' solid blade bar
- * 5/8" x 6" Blades(Ultra-Kor tm)
- * Replaceable slides 5/8" x 2 1/2"
- * Reinforced rear deflector shield
- * Standard front safety chain guards

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
672HD	6' Brush Cutter 540 RPM Single tail wheel	1600 lbs	\$10,999
672HD-1	6' Brush Cutter 1000 RPM Single tail wheel	1600 lbs	\$10,999
672HD-D	6' Brush Cutter 540 RPM Dual tail wheel	1720 lbs	\$11,799
672HD-D-1	6' Brush Cutter 1000 RPM Dual tail wheel	1720 lbs	\$11,799
684	7' Brush Cutter 540 RPM Dual tail wheel	2200 lbs	\$12,689
684-1	7' Brush Cutter 1000 RPM Dual tail wheel	2200 lbs	\$12,689

ROTARY CUTTER CHAIN MULCHER OFFSET

Fransgård



New from Fransgard, a 3 Pt. hitch, 5' offset rotary cutter, 540 RPM PTO with a unique cutting system consisting of four 3/8" x 30" long chains used as the cutting/mulching blades. This unit has the ability to cut or mulch material up to 4" in diameter, offset from the tractor. For cutting ditch banks, around ponds, fence lines etc.

- * **540 RPM PTO**
- * **PTO Shaft with overrunning clutch**
- * **5' cutting width**
- * **Cutting capacity up to 4"**
- * **Cutting chains 4 x 3/8" x 30" long, hardened**
- * **Rear Safety Guard**
- * **Adjustable hydraulic offset capabilities up to 47"**
- * **Offset overload protection**
- * **Cat II 3 Pt. hitch**
- * **Triple banded v-belt with automatic belt tightner**
- * **Requires two sets of hydraulic remotes**
- * **Includes hydraulic hoses**
- * **Minimum 45 HP required**
- * **Range of cutting head movement (degrees) 35 down/90 up**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
FKR150	5' PTO Offset Rotary Cutter	1797 lbs	\$16,695

ROTARY CUTTER TREE CUTTER



The BROWN Mfg. 3 Pt. hitch Tree Cutter can give you the high performance and ability you expect from a machine of this quality. With either an open deck or the versatility of a folding deck unit you can cut and mulch trees, up to 8" diameter.

Model Price	TCO-2505C \$12,699	TCO-2605C \$14,159	TCO-2625C \$15,699	TCF-2605 \$15,875	TCF-2625 \$17,665
Model/RPM	Open Deck 540 RPM	Open Deck 540 RPM	Open Deck 540 RPM	Folding Deck 540 RPM	Folding Deck 540 RPM
Model Price	TCO-2500C \$12,699	TCO-2600C \$14,159	TCO-2620C \$15,699	TCF-2600 \$15,875	TCF-2620 \$17,665
Model/RPM	Open Deck 1000 RPM	Open Deck 1000 RPM	Open Deck 1000 RPM	Folding Deck 1000 RPM	Folding Deck 1000 RPM
Cutting Width	60"	72"	72"	72"	72"
PTO	Over-running 4 Disc Slip Clutch PTO				
Frame	3 x 3 x 1/4" Tubing	3 x 3 x 1/4" Tubing	3 x 3 x 1/4" Tubing	3 x 3 x 1/4" Tubing	3 x 3 x 1/4" Tubing
Deck	3/16" Plate Reinforced	Reinforced Double 1/4" plate to 1/2" total	Reinforced Double 1/4" plate to 1/2" total	Reinforced Double 1/4" plate to 1/2" total	Reinforced Double 1/4" plate to 1/2" total
Weight	1,705 Lbs.	2,240 Lbs.	2,455 Lbs.	2,565 Lbs.	2,710 Lbs.
Rear Guard / Rear Deck	2 Coil springs, collapsible push bar type	2 Coil springs, collapsible push bar type	2 Coil springs, collapsible push bar type	Twin folding Hydraulic rear sec- tion	Twin folding Hydraulic rear sec- tion
Gear Box	145 HP	145 HP	165 HP	145 HP	165 HP
H.P	50 to 90	60 to 90	70 to 100	70 to 90	80 to 100
Material Size	6" Maximum	6" Maximum	8" Maximum	6" Maximum	8" Maximum

H&S

H & S Manufacturing Company Marshfield Wisconsin

H & S Mfg. was founded in 1967 by Mr. Laurie Heikenen and remains a family owned business today. Manufacturers of quality agricultural equipment, forage boxes, manure spreaders and hay equipment including hay rakes and windrow mergers. H & S is also now manufacturing a grinder mixer. Contact your local H & S dealer for your equipment needs or call 519-461-1499 for the dealer in your area.



SICKLE BAR MOWERS



For tractors from 20 to 75 HP, the double action sickle bar mowers are Category I/II 3 Pt. hitch mounted. Units come with a safety breakaway bar that helps protect the cutter from obstructions in the field. Units come with a second sickle cutting knife. All units are equipped with a hydraulic lift on the cutter bar, single acting, tractor must be equipped with rear remote hydraulic couplers.

- * **HP Requirements: 20-75, 540 RPM**
- * **Double action sickle bar**
- * **Adjustable 3 Pt. hitch**
- * **Safety release**
- * **3 Pt. linkage, Cat. 1 and 2**
- * **Extra blade and chain with hook**
- * **Transport blade protection**
- * **Hydraulic lift system**
- * **Heavy duty shielded PTO shaft (1-3/8" ASAE Cat. 4)**
- * **Cuts at 45° up and 45° down**
- * **Belt Driven**
- * **Hydraulic Lift Cutter bar**
- * **Tractor counter weight maybe required**

MODEL	CUTTING WIDTH	LIFT TYPE	WEIGHT	LIST PRICE
SBM006	6' / 72"	Hydraulic	576 lbs.	\$6499
SBM007	7' / 84"	Hydraulic	600 lbs.	\$6799
SBM008	8' / 96"	Hydraulic	648 lbs.	\$7499
SBM009	9' / 108"	Hydraulic	731 lbs.	\$8299

SICKLE BAR MOWER

HEAVY DUTY 3 Pt. Hitch



BEFCO'S new heavy duty sickle bar mower for 20 – 75 HP tractors has a heavier cutting bar 20mm thick with more robust guards that can handle rougher conditions. CAT.1 - 3 pt. Hitch, 540 RPM PTO shaft, comes with weight compensation spring, and a safety release latch which protects the unit from obstructions during operation. Includes a hydraulic cylinder to raise and lower cutting bar for mowing at an angle or for transport and storage. These mowers have the capabilities of mowing from 90 degrees UP to -55 degrees DOWN making it capable of handling jobs that are not recommended for conventional disc mowers.

- * Available in 72", 84" & 96" working width
- * For 20 – 75 HP Tractors
- * Cat. I - 3 Pt. hitch
- * 540 RPM PTO (cat. 4 Shaft)
- * Max. working speed 9 mph/14 kmph
- * Hydraulic (single acting) lift, with hydraulic hose and coupler
- * c/w extra knife/blade assembly and knife guard
- * c/w 6 extra knife sections and 2 extra guards

MODEL	CUTTING WIDTH	LIFT TYPE	WEIGHT	LIST PRICE
BSB272	6' / 72"	Hydraulic	628 lbs.	\$7459
BSB284	7' / 84"	Hydraulic	650 lbs.	\$7689
BSB296	8' / 96"	Hydraulic	672 lbs.	\$8539

STRING TRIMMER

Engine Driven

Walk Behind



The SWISHER walk-behind string trimmer is an ideal back-saving alternative to heavy hand-held gas trimmers. The trimmer's extra wide 22" cutting swath rivals that of most lawnmowers, while it's user-friendly design offers unsurpassed precision trimming performance. The trimmer features 13.75" wheels for plenty of clearance and smooth rolling over rough terrain. The trimmer line is easily replaced without the use of tools

- * 190CC Briggs & Stratton Engine
- * Offset fixed left
- * Two 13.75" solid tires
- * Trimmer head (2).155" strings = 4 cutting strings
- * .25 US gallon fuel capacity

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ST67522BS	190cc Push String Trimmer	84 lbs.	\$695

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
P3618	36 pack, 18" .155 trimmer line	\$18

FINISHING MOWER

Engine Driven

Pull Type



SWISHER finish cut Trailmower is perfect for any large area of grass to be mowed. Backed by the power of 60 + years of design experience, this mower is designed to dramatically reduce mowing time. The SWISHER Trailmower easily attaches to your ATV, UTV or lawn tractor to cut large lawns or park areas. This trailmower is powered by a 14.5 HP Briggs & Stratton engine and gives your lawn a manicured look. A 60" side-discharge fabricated cutting deck cuts a wide swath and spreads the grass out to avoid choking. The true floating deck reduces scalping for professional mowing results, even on tricky terrain. This mower is equipped with a 12 volt key starter (12V battery not included). A universal articulating hitch attaches to any pin hitch system and lets the mower maneuver easily behind the towing vehicle.

- * 14.5 HP Briggs & Stratton Engine
- * Offset hitch, left/right/center articulating
- * Tires four 13x5x6 pneumatic tires
- * Three finishing cut blades
- * Side discharge fabricated mower deck
- * Cutting Height 1.5" – 5.5" Manual 3 point full floating deck
- * Includes front mount anti-scalping rollers
- * 2.5 US gallon fuel capacity
- * Clevis/pin type hitch
- * 12V electric start
- * Manual PTO Clutch
- * 12V battery not included

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
FC14560BS	60", 14.5 HP B&S engine Electric start	353 lbs.	\$3759

FINISHING MOWERS

Engine Driven



Gas powered mowers for lawn tractors and ATV's. This three spindle finishing mower comes complete with:

- * 11.5 HP Briggs & Stratton I/C engine with centrifugal clutch
- * Rear discharge
- * Spindle shafts greased from the top for easy service
- * Two front swivel tires and two rear non-swivel tires
- * Cutting height: 1" to 4"
- * Cat. 1 ball hitch
- * Semi pneumatic tires
- * 10 gauge reinforced mower deck
- * Heavy duty reinforced belt (BX)
- * Heavy duty, one piece, balanced steel pulleys
- * Safety kill switch
- * High blade tip speed

MODEL	CUTTING WIDTH	BLADE TIP SPEED (FT/MIN)	WEIGHT	LIST PRICE
C30CE5H	60"	14,173	388 lbs.	\$4195

FINISHING MOWERS

3 Pt. Rear Discharge



These mowers are ideal for use with 540 RPM 15 – 30 HP tractors with Cat. I 3 Pt. hitch. These three blade finishing mowers with a rotor speed of 2630 RPM are available in 5' and 6' cutting width. These mowers are perfect for maintaining any type of grassy area, from your home estate to golf courses and park areas. These mowers are designed to easily adjust the cutting height, which can be changed by simply adjusting the spacers on the wheel yoke.

- * Rear Discharge with rear safety chains
- * 3" x 8" Solid Rubber Wheel/Tires
- * Floating Style Cat. I 3 Pt. Hitch
- * 540 RPM PTO
- * Powder Coat Paint
- * Deck thickness 5' - 12ga.
6' - 10ga.
- * 3 Blades with Greaseable Spindles
- * Blade tip speed 5' - 14,961 ft/min.
6' - 13,976 ft/min
- * Double V-Belt Drive
- * Cutting Height Adjustment 1-1/2" to 4-1/2"

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
BFM105	5' / 60" cutting width mower	386 lbs.	\$1775
BFM106	6' / 72" cutting width mower	508 lbs.	\$2199

FINISHING MOWERS

C30 Series

Rear Discharge



Optional front anti-scalping roller

For tractors 16 to 30 HP, 540 RPM, Category 1, 3 Pt. hitch. Rear discharge, three spindle grooming mower.

- * Highly engineered & rugged gearbox with cooling fins
- * Front and rear tractor mounting
- * Four swivel 9" x 3.5" (4 ply with tubes) pneumatic tires
- * Floating 3 Pt. linkage, Cat. 1
- * 11 gauge reinforced mower deck
- * 1" to 4" cutting height
- * Spindle shafts greased from the top for easy service
- * Heavy duty reinforced belt (BX)
- * Heavy duty, one piece, balanced steel pulleys
- * High blade tip speed
- * Precise blade overlap

MODEL	CUTTING WIDTH	BLADE TIP SPEED (FT/MIN)	WEIGHT	LIST PRICE
C30RD5A	60"	14,763	364 lbs.	\$3429
C30RD6A	72"	14,566	429 lbs.	\$3729

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
001-600	Front antiscalping roller	\$165
005-600	Mulching kit for model C30RD5	\$495
006-600	Mulching kit for model C30RD6	\$530

FINISHING MOWERS

C50 Series

Rear Discharge



Optional front anti-scalping roller

C50RD7A
Shown



Floating Linkage
on 5' & 6'

Ideal for tractors from 20 to 50 HP. Category 1, 3 Pt. hitch, 540 RPM. These 3 spindle **BEFCO** rear discharge mowers come complete with:

- * 1" to 5" cutting height
- * Highly engineered & rugged gear box with cooling fins
- * Heavy duty shielded PTO shaft (1-3/8" ASAE Cat. 3)
- * Four height control bearingwheels
- * Floating 3 Pt. linkage, Cat. 1
- * Spindle shafts greased from the top for easy service
- * Heavy duty, one piece, balanced steel pulleys
- * Two heavy duty reinforced belts (SPBX)
- * High blade tip speed
- * Pneumatic tires 11" x 4" (4 ply with tube)
- * 8 gauge reinforced mower deck
- * Four castor wheels
- * C50RD5 & C50RD6 mowers include standard CAT. I lower lift pins
- * C50RD7 mower includes CAT. I clevis type lower lift pins

MODEL	CUTTING WIDTH	BLADE TIP SPEED (FT/MIN)	WEIGHT	LIST PRICE
C50RD5A	60"	16,929	534 lbs.	\$4499
C50RD6A	72"	16,732	584 lbs.	\$4779
C50RD7A	84"	16,338	674 lbs.	\$5579

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9915	Front anti-scalping roller for 5' and 6' mowers, standard on 7' mower	\$189
009-9815	Professional front anti-scalping roller	\$265
005-700	Mulching kit for model C50RD5	\$515
006-700	Mulching kit for model C50RD6	\$585
007-700	Mulching kit for model C50RD7	\$685

FINISHING MOWERS

C70 Series

Rear Discharge



For tractors from 30 to 70 HP, Category 1, 3 Pt. hitch, 540 RPM. These 3 spindle **BEFCO** rear discharge mowers come complete with:

- * Highly engineered & rugged gearbox with cooling fins
- * Cutting height: 1.3" to 5.3"
- * Front and rear tractor mounting
- * Four heavy duty bearing wheels
- * Floating 3 Pt. linkage, Cat. 1
- * Two heavy duty reinforced belts (CX)
- * Heavy duty shielded PTO shaft (1-3/8" ASAE Cat. 4)
- * Six free swinging kick back blades
- * Spindle shafts greased from the top for easy service
- * Heavy duty, one piece, balanced steel pulleys
- * High blade tip speed
- * Pneumatic tires 13" x 6.5" 4 ply with tubes
- * Front anti-scalping roller
- * 8 gauge reinforced mower deck
- * Optional hard rubber, semi-pneumatic tires available

MODEL	CUTTING WIDTH	BLADE TIP SPEED (FT/MIN)	WEIGHT	LIST PRICE
C70090A	90"	13,976	1137 lbs.	\$8879
C70110A	110"	14,960	1290 lbs.	\$10,499

FLEX MOWERS

3 Pt. Hitch



- * HP Requirements: 25-60, 540 RPM
- * 1" to 4" cutting height
- * Available in rear 3 Pt. or front 3 Pt. hitch mounting, specify at time of order
- * Single action hydraulic folding wings
- * Cat. 1, 3 Pt. hitch
- * Heavy duty reinforced belts (BX)
- * Driveline with slip clutch (1-3/8" ASAE Cat. 6)
- * Three completely independent free floating mower decks
- * Transport width 7'10" max.
- * Transport safety locks
- * Unique double pivot floating linkage
- * Front anti-scalping roller standard
- * 4 pneumatic tires with bearings per mower deck
- * 9" x 3.5" pneumatic tires (4 ply with tubes)
- * Includes detachable wheeled transport frame

MODEL	CUTTING WIDTH	UNIT MAKEUP	WEIGHT	LIST PRICE
112EZFA	12 ft	(2) 4' & (1) 5'	1870 lbs.	\$20,249
115EZFA	15 ft	(2) 5' & (1) 6'	2112 lbs.	\$23,199

OPTIONS:

MODELS	DESCRIPTION	LIST PRICE
009-9592	Mulching kit for model 112EZF (3 units)	\$1429
009-9826	Mulching kit for model 115EZF (3 units)	\$1575
009-9593	Hydraulic unlocking system	\$815

FLEX MOWERS

Pull Type Cyclone Flex



For technical specifications on individual mower decks
see page 23 (C50 Mowers)

- * HP Requirements: 25-60, 540 RPM
- * Heavy duty transport frame
- * Cutting height: 1" to 5"
- * Pull type mower with high flotation transport tires (20.5" x 8"x10")
- * Single action hydraulic folding wing system for easy transport and storage
- * Transport width 7' 10" max.
- * CV driveline with slip clutch (1-3/8" ASAE Cat. 6)
- * Deck overlap adjustment 6"
- * Three front anti-scalping rollers standard
- * Safety chain shield standard
- * Remote safety locks for transporting
- * Each mower deck has four 11" x 4" (4 ply pneumatic tires & tubes)
- * Optional hard rubber, semi-pneumatic tire for mower decks available. Specify at time of order

MODEL	CUTTING WIDTH	UNIT MAKE UP	WEIGHT	LIST PRICE
312FLXA	12'	(2) FX4 & (1) FX5	2694 lbs.	\$24,799
315FLXA	15'	(2) FX5 & (1) FX6	2826 lbs.	\$26,999
317FLXA	17'	(3) FX6	2947 lbs.	\$27,999

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9556	Mulching kit for model 312-FLX (3 units)	\$1515
009-9557	Mulching kit for model 315-FLX (3 units)	\$1659
009-9558	Mulching kit for model 317-FLX (3 units)	\$1809
009-9552	Hydraulic unlocking system	\$815
009-9597	Floating hitch	\$375

FLEX MOWERS

Super-Flex Pull Type



For technical specifications on individual mower decks
see page 23 (C50 Mowers)

- * HP Requirements: 35-80, 540 RPM
- * Extra heavy duty transport frame
- * 1" to 5" cutting height
- * Pull type mower with high flotation transport tires (23" x 10.5" x 12")
- * Single action hydraulic folding wing system for easy transport and storage
- * Three front anti-scalping rollers standard
- * CV driveline with slip clutch (1-3/8" ASAE Cat. 6)
- * Deck overlap adjustment 6"
- * Safety chain shield standard
- * Remote safety locks for transporting
- * Each mower deck has four 13" x 6.5" (4 ply air tires with tubes)

MODEL	CUTTING WIDTH	UNIT MAKEUP	WEIGHT	LIST PRICE
412SFLA	12'	(2) SF4 & (1) SF5	3090 lbs.	\$29,199
415SFLA	15'	(2) SF5 & (1) SF6	3267 lbs.	\$30,599
417SFLA	17'	(3) SF6	3438 lbs.	\$33,199
420SFLA	20'	(3) SF7	3747 lbs.	\$37,399

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9556	Mulching kit for model 412-SFL (3 units)	\$1515
009-9557	Mulching kit for model 415-SFL (3 units)	\$1659
009-9558	Mulching kit for model 417-SFL (3 units)	\$1809
009-9559	Mulching kit for model 420-SFL (3 units)	\$2115
009-9552	Hydraulic unlocking system	\$815
009-9597	Floating hitch	\$375

Weights indicated are base machine weight, not shipping weight

FLAIL MOWERS

H40 Series, Hurricane



For tractors from 15 to 40 HP, Category 1, 3 Pt. hitch, 540 RPM. Flail mowers come complete with:

- * 1" to 5" cutting height
- * Two heavy duty reinforced notched belts (SPBX)
- * Highly engineered & rugged gearbox with cooling fins
- * High blade tip speed
- * Adjustable cutting height roller
- * Perfectly balanced rotor
- * Two pc. regular cut knives - Optional
- * Two pc. fine cut knives - Standard
- * Clockwise rotation is standard
- * Offset from center: 3" on H40-048
8.5" on H40-060
6.5" on H40-072
- * Front rubber safety shielding
- * Optional hammer type blades available

MODEL	CUTTING WIDTH	STANDARD # BLADES	OFFSET	WEIGHT	LIST PRICE
H40-048	48"	48	3"	418 lbs.	\$4399
H40-060	60"	64	8.5"	456 lbs.	\$4799
H40-072	72"	76	6.5"	528 lbs.	\$5189

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9507	Side skid shoes (pair)	\$155
009-9200	*Hammer type blades for model H40-048	\$369
009-9201	*Hammer type blades for model H40-060	\$489
009-9202	*Hammer type blades for model H40-072	\$585

*Specify at time of order

FLAIL MOWERS

H70 Series, Hurricane



For tractors from 30 to 70 HP, Category 1, 3 Pt. hitch, 540 RPM. Flail mowers come complete with:

- * 3/4" to 6" cutting height
- * Front & rear tractor mounting
- * Adjustable cutting height roller with scraper
- * High blade tip speed
- * Heavy duty shielded PTO shaft with over running clutch (1-3/8" ASAE Cat. 4).
- * Highly engineered & rugged gearbox
- * Electronically balanced rotor
- * Two heavy duty reinforced notched belts (CX)
- * Semi-automatic belt tensioner
- * Floating top link
- * Sealed rotor bearings
- * Fine cut (2 Pc) knives-standard
- * Regular cut (2 pc reversible Y) knives - Optional
- * Forward rotor rotation is standard
- * Reverse rotor rotation is optional (Extra)
- * Rotor RPM: 2080
- * Blade tip speed (ft/min): 8464
- * Optional hammer type blades available

MODEL	CUTTING WIDTH	OVERALL WIDTH	# BLADES	WEIGHT	LIST PRICE
H70-060	60"	71"	64	869 lbs.	\$8999
H70-072	72"	85"	80	955 lbs.	\$9599
H70-088	88"	99"	96	1078 lbs.	\$10,199

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9691	Gauge wheels with laminated tires (pair)	\$1390
009-9201	*Hammer type blades for model H70-060	\$489
009-9203	*Hammer type blades for model H70-072	\$605
009-9204	*Hammer type blades for model H70-088	\$719

*Specify at time of order

Weights indicated are base machine weight, not shipping weight

FLAIL MOWERS

H80 Series

Hurricane Commercial



Ideal for tractors from 40 to 80 HP, Category 1 and 2, 3 Pt. hitch, 540 RPM. Flail mowers come complete with:

- * 3/4" to 6" cutting height
- * Frame thickness: 8 gauge
- * Side plates thickness: 5/16"
- * Rotor diameter: 6"
- * Rotor wall thickness: 5/16" (72") & 3/8" (88" and 100")
- * Regular cut (2 pc. reversible Y) blades - standard
- * Fine cut (2 pc.) blades - optional
- * High blade tip speed
- * Adjustable cutting height roller with scraper
- * Highly engineered gearbox
- * Front & rear tractor mounting
- * Electronically balanced rotor
- * Heavy duty, one piece, balanced steel pulleys
- * Two heavy duty reinforced notched belts (CX)
- * 3 Pt. linkage, Cat. 1 and 2
- * Floating top link
- * Forward rotor rotation is standard
- * Reverse rotor rotation is optional (Extra)
- * Replaceable skid shoes
- * Semi-automatic belt tensioner
- * Sealed 2" rotor bearings
- * Driveline with over-running clutch (1-3/8" ASAE Cat. 6)
- * Rotor RPM: 1873
- * Blade tip speed (ft/min): 8268
- * Optional hammer type blades available

MODEL	CUTTING WIDTH	OVERALL WIDTH	# BLADES	WEIGHT	LIST PRICE
H80-072	72"	85"	80	1153 lbs.	\$11,899
H80-088	88"	99"	96	1296 lbs.	\$13,199
H80-100	100"	110"	104	1486 lbs.	\$14,499

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9701	Gauge wheels with laminated tires (pair)	\$1649
009-9203	*Hammer type blades for model H80-072	\$605
009-9204	*Hammer type blades for model H80-088	\$719
009-9205	*Hammer type blades for model H80-100	\$779

*Specify at time of order

FLAIL SHREDDER

Destroyer Series



New from BEFCO a heavy duty Flail shredder, with hydraulic side shift. Available in three sizes 60", 72", and 88". Comes standard with Cat. I & II rear mounted 3 Pt. hitch. Heavy duty hammer type blades that can shred material up to 2" thickness. Horse power recommended 40- 90.

- * Cat. I & II Rear Mount 3 Pt. Hitch
- * 540 RPM PTO with Overrunning Clutch is standard
- * 4 Belt Driven Transmission, with Manual Belt Tensioner
- * Hydraulic Side Shift (Offset) 12" on 60" model & 16" on 72" & 88" models
- * Heavy Duty Hammer Type blades
- * Rotor Diameter 133mm(5-1/4"), 8mm(1/4") thick tube
- * Height adjustment via rear roller, with scraper
- * Rear Roller Diameter 168mm(6-1/2"), 4.5mm(3/16") thick tube

MODEL	D90-060	D90-072	D90-088
WORKING WIDTH	60"	72"	88"
OVERALL WIDTH	69"	81"	96"
WEIGHT	1257 lbs.	1345 lbs.	1491 lbs.
# OF HAMMERS	16	20	24
HYD SIDE SHIFT	12"	16"	16"
CUTTING CAPACITY	2"	2"	2"
PRICE	\$11,299	\$11,999	\$12,599

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9968	*Dual PTO gear box and front mount 3 Pt. hitch (Factory Installed)	\$495
009-9969	Skid shoes (pair)	\$325

*Specify at time of order

Weights indicated are base machine weight, not shipping weight

ROTARY TILLER

Engine Driven - Pull Type

Agri-Fab
Lawn Care Made Easy



The Agri-Fab Multi-Fit tow behind rotary tiller comes with a 6.5 HP B&S Intek engine and has a 36" tilling width with conveniently located controls. Quickly prepare the perfect planting bed with minimal effort. Can be used with any ATV or garden tractor above 12 HP.

- * 163cc B&S Engine with 2 year warranty
- * Recoil start
- * 36" Tilling width
- * Forward rotating tines
- * Six double edge 11" diameter heavy duty tines
- * Tilling depth adjustable from 1-1/2" to 5-1/2"

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450308	Pull type - 36"	229 lbs.	\$2189

ROTARY TILLERS

Manual Side-Shift



The **ROTOMECH** tiller is a rugged machine with an extremely simple and functional side shift at no additional charge. Ideal for tractors ranging from 20 to 40 HP. Tillers come complete with:

- * Highly engineered and rugged gearbox
- * Four knives per flange
- * Solid rotor shaft
- * Heavy duty tiller blades
- * Shielded shear pin PTO
- * Cat I 3 Pt. hitch
- * Reinforced lateral 80 ASA chain drive transmission in oil bath
- * Adjustable skids for depth control
- * Exchangeable sprockets for 2 rotor speeds, 231/375 RPM
- * Working Depth up to 7 1/4"

WORKING						LIST
MODEL	WIDTH	OFFSET	# FLANGES	# KNIVES	WEIGHT	PRICE
142-231	42"	10"	5	20	373 lbs.	\$3099
150-231	50"	14"	6	24	407 lbs.	\$3199
158-231	58"	18"	7	28	452 lbs.	\$3399
166-231	66"	22"	8	32	492 lbs.	\$3599

ROTARY TILLERS

T30 Series

Manual Side-Shift



For tractors from 18 to 30 HP. Category 1, 3 Pt. hitch, 540 RPM PTO. T30 series tillers come complete with:

- * HP Requirements: 16-30, 540 RPM
- * Highly engineered and rugged gearbox with cooling fins
- * Four blades per flange
- * High carbon solid steel round rotor shaft allows for a deeper working depth
- * Heavy duty full size blades
- * Heavy duty shielded PTO shaft with shear pin coupling (1-3/8" ASAE Cat. 2)
- * # 60 chain drive
- * Adjustable side skids for working depth control

MODEL	WORKING			# BLADES	WEIGHT	LIST PRICE
	WIDTH	OFFSET	# FLANGES			
T30-134	34"	6"	4	16	297 lbs.	\$2999
T30-142	42"	10"	5	20	341 lbs.	\$3099
T30-150	50"	14"	6	24	374 lbs.	\$3299

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9538	Cat. 0, 3 Pt hitch (Specify at time of ORDER)	\$235

Specify at time of order

ROTARY TILLERS

T40 Series

Manual Side-Shift



For tractors up to 40 HP. Category 1, 3 Pt. hitch, 540 RPM PTO. T40 series tillers come complete with:

- * Highly engineered and rugged gearbox
- * Four blades per flange
- * Solid steel rotor shaft
- * Adjustable side skirts for working depth control
- * Wear protection on chain case
- * Heavy duty full size blades
- * Heavy duty shielded PTO shaft with slip clutch safety (1-3/8" ASAE Cat. 3)
- * # 80 chain drive with exchangeable sprockets for 2 rotor speeds, 231/375 RPM

MODEL	WORKING			# FLANGES	# BLADES	WEIGHT	LIST PRICE
	WIDTH	OFFSET					
T40-242	42"	10"		5	20	373 lbs.	\$3759
T40-250	50"	14"		6	24	417 lbs.	\$3909
T40-258	58"	18"		7	28	461 lbs.	\$4049
T40-266	66"	22"		8	32	530 lbs.	\$4439

Weights indicated are base machine weight, not shipping weight

ROTARY TILLERS

T50 Series

Manual Side-Shift



For tractors up to 50 HP. Category 1, 3 Pt. hitch, 540 RPM PTO. T50 series tillers come complete with:

- * HP Requirements: 25-50, 540 RPM
- * Highly engineered and rugged gearbox
- * Six blades per flange for greater stability & finer soil pulverization
- * Solid steel rotor shaft
- * Heavy duty shielded PTO with shaft with slip clutch safety (1-3/8" ASAE Cat. 4)
- * Heavy duty full size tiller blades
- * Wear protection on chain case
- * Adjustable side skirts for working depth control
- * Lateral #100 Roller Chain drive transmission in oil bath
- * Exchangeable sprockets for two rotor speeds 226/383 RPM
- * Max. working depth 8-3/8"

	WORKING					LIST
MODEL	WIDTH	OFFSET	# FLANGES	# BLADES	WEIGHT	PRICE
T50-350	50"	14"	6	36	481 lbs.	\$4699
T50-358	58"	18"	7	42	528 lbs.	\$4899
T50-366	66"	22"	8	48	575 lbs.	\$5100

ROTARY TILLERS

T60 Series

Manual Side-Shift



For tractors up to 60 HP. Category 1, 3 Pt. hitch, 540 RPM PTO. T60 series tillers come complete with:

- * HP Requirements: 30-60, 540 RPM
- * Highly engineered and rugged gearbox
- * Six blades per flange for greater stability & finer soil pulverization
- * Solid steel rotor shaft
- * Heavy duty full size tiller blades
- * Wear protection on chain case
- * Adjustable side skids for working depth control
- * # 100 chain drive in oil bath
- * Heavy duty shielded PTO shaft with slip clutch safety (1-3/8" ASAE Cat.6)
- * Max. working depth 8-3/8"

MODEL	WORKING WIDTH	OFFSET	# FLANGES	# BLADES	WEIGHT	LIST PRICE
T60-366	66"	22"	8	48	740 lbs.	\$6379
T60-374	74"	26"	9	54	798 lbs.	\$6639

Weights indicated are base machine weight, not shipping weight

ROTARY TILLERS

T70 Series



For tractors up to 70 HP. Category 1, 3 Pt. hitch, 540 RPM PTO. T70 series tillers come complete with:

- * HP Requirements: 30-70, 540 RPM
- * Heavy duty reinforced frame
- * Six blades per flange for greater stability & finer soil pulverization
- * Max working depth 8-3/4"
- * Wear protection on chain case
- * Heavy duty shielded PTO shaft with slip clutch safety (1-3/8" ASAE Cat.6)
- * Adjustable side skids for working depth control
- * Flanged rotor shaft for easy removal & service
- * Solid steel rotor shaft
- * Heavy duty gearbox
- * # 100 chain drive transmission in oil bath

MODEL	WORKING WIDTH	OFFSET	# FLANGES	# BLADES	WEIGHT	LIST PRICE
T70-382	82"	22"	10	60	879 lbs.	\$6999

H&S

>> H&S RAKES... BEST IN CLASS!



> The ACTION Rake is the ONLY Rake on the market that features the unique "Kwik Pik" System for Immediate Clearance of Windrows when Raised!

> Available in 8, 10, & 12 wheel models, the CR & ACTION Rakes feature a **PROVEN** Rake Arm Pivot Joint for Flexibility!



Buy the BEST
BUY **H&S**



The most flexible rake on the market, the H&S 12, 14, & 16 wheel Hi-Capacity Rakes have the rake wheels positioned ahead of the arms, main frame beams and transport wheels, so there are no hang-up points when raking heavy crop.

AERATOR / OVERSEEDER

Green-Rite



For tractors from 25 to 70 HP. Category 1, 3 Pt. hitch. 540 RPM PTO. **BEFCO** Green-Rite Overseeders/Primary seeders come complete with:

- * **HP Requirements: 25-70, 540 RPM**
- * **Series T40 rotary tiller base machine on 50", 58", 66" and T70 on 82"**
- * **Special 2.8" flange spacing on rotor for aerating with 3 knives per flange on GRT250, GRT258 & GRT266**
- * **4 knives per flange on GRT288**
- * **Straight aerator knives**
- * **Seed covering/dethatching adjustable tickler tines**
- * **Seed hopper with metering cups**
- * **Ground drive system for seed hoppers**
- * **Corrugated depth control roller made with low weight nylon/fiberglass roller rings**
- * **Heavy duty shielded PTO shaft with slip clutch safety**

MODEL	WORKING WIDTH	HOPPER CAP. CU. FT.	# FLANGES	# BLADES	WEIGHT	LIST PRICE
GRT250	50"	4.60	15	43	910 lbs.	\$11,949
GRT258	58"	5.30	18	52	998 lbs.	\$12,289
GRT266	66"	6	21	61	1170 lbs.	\$13,779
GRT282	82"	7.6	26	104	1500 lbs.	\$17,749

NOTE: Units may utilize gauge wheels or a gauge roller for blade depth control, but not both.

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9875	Gauge wheels for all models	\$570
009-9648	Front roller for GRT-250	\$905
009-9516	Front roller for GRT-258	\$955
009-9563	Front roller for GRT-266	\$1039
009-9566	Front roller for GRT-282	\$1119
009-9649	Tiller rotor for GRT-250	\$899
009-9517	Tiller rotor for GRT-258	\$1009
009-9564	Tiller rotor for GRT-266	\$1129
009-9567	Tiller rotor for GRT-282	\$2089
009-9650	Rear roller scraper for GRT-250	\$315
009-9539	Rear roller scraper for GRT-258	\$359
009-9565	Rear roller scraper for GRT-266	\$499
009-9568	Rear roller scraper for GRT-282	\$569

SEEDER/OVERSEEDER SEED-RITE



The BEFCO Seed-Rite is a primary full width seeder / overseeder. 74" working width, with a ground drive system for seed hopper. Steel seed box comes with a steel shaft agitator with ten high precision metering seed cups, with a wide range of calibration settings per acre. Two nylon/fiberglass corrugated rollers 9-1/2" in diameter the working width of seeder compact seed into soil. Unit can also be used as an overseeder for seeding existing lawns, parks etc.

- * **Cat. I, 3 Pt. Hitch (quick hitch compatible)**
- * **Parking stands**
- * **74" seeding width**
- * **80" overall width**
- * **Heavy duty frame**
- * **Heavy duty seed box lid with seed splash guard**
- * **Seed box capacity 7 cu.ft.(5-1/2 Bu.)**
- * **Seed box agitator**
- * **10 high precision metering seed cups**
- * **Wind guarded seed drop**
- * **Two 9-1/2" diameter nylon/fiberglass corrugated rollers**
- * **Greaseable roller bearings**
- * **Two spring tine track removers**

MODEL	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
SRT074	74" Seed-Rite Seeder/Overseeder	990 lbs.	\$7999

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9930	Rear Expanded Roller Frame with Adjustable Tickle Tines for Seed Covering & De-thatching	\$819

SOIL-PULVERIZERS



- * 3/8" steel spikes fully welded in a timed scroll pattern
- * 10" frame beam (Standard)
- * 12" frame beam (Heavy Duty)
- * Two rows heavy duty reversible heat treated scarifier shanks
- * 5-9/16" dia. spiked roller tube (Standard)
- * 6-5/8" dia. spiked roller tube (Heavy Duty)
- * Complete with two 160 lbs. compression roller springs
- * Optional 2nd spiked roller available with 2-80 lb. compression
- * Reversible heat treated 1/2" x 2" shanks
- * 3 Pt. linkage, Cat. 1
- * Self aligning 1" bearing on roller
- * Formed plate "A" frame
- * Shank spacing 2-13/16"

STANDARD

MODEL	WORKING WIDTH	WEIGHT	# SHANKS	# ROLLER SPIKES	LIST PRICE
BPL048	48"	496 lbs.	17	70	\$2549
BPL060	60"	652 lbs.	21	88	\$2699
BPL072	72"	679 lbs.	25	106	\$2999

HEAVY DUTY

MODEL	WORKING WIDTH	WEIGHT	# SHANKS	# ROLLER SPIKES	LIST PRICE
BPL284	84"	875 lbs.	29	124	\$3999

OPTIONS:

Add-on double roller includes bracket & bearings

MODEL	DESCRIPTION	LIST PRICE
009-9887	48" x 5" dia. for BPL048	\$730
009-9636	60" x 5" dia. for BPL060	\$849
009-9637	72" x 5" dia. for BPL072	\$1039
42 009-9647	84" x 5-9/16" dia. for BLP284	\$1299

Weights indicated are base machine weight, not shipping weight

CORE AERATORS

Heavy Duty



Shown with optional Steel Weight Tanks

- * Spoon spacing 6-1/2"
- * Working depth 4-1/2"
- * Special high tensile steel shafts on the rotors
- * Two bronze bushings per rotor
- * 3/16" formed steel support panels
- * All panels support rotors from all sides
- * 1-1/4" rotor support shaft
- * 3 Pt. linkage Cat. 1 and 2
- * Cat. 1 and 2 quick hitch adaptable
- * Eight spoons per hub
- * All flanges are welded to rotors
- * Rotor flange thickness 3/16"
- * Three support stands
- * 3/4" hardened steel spoons
- * Front or rear tractor mounting


MODEL	WORKING WIDTH	OVERALL WIDTH	WEIGHT	# SPOONS	ADDITIONAL WEIGHT AREA	LIST PRICE
BCA260	60"	65"	444 lbs.	80	19" x 21"	\$3999
BCA272	72"	78"	549 lbs.	96	25" x 21"	\$4399

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9734	Steel weight tank (model BCA260) 2 Required	\$489 ea
009-9735	Steel weight tank (model BCA272) 2 Required	\$525 ea

Weights indicated are base machine weight, not shipping weight

REAR SCRAPER BLADES 3 Pt. 4100 Series

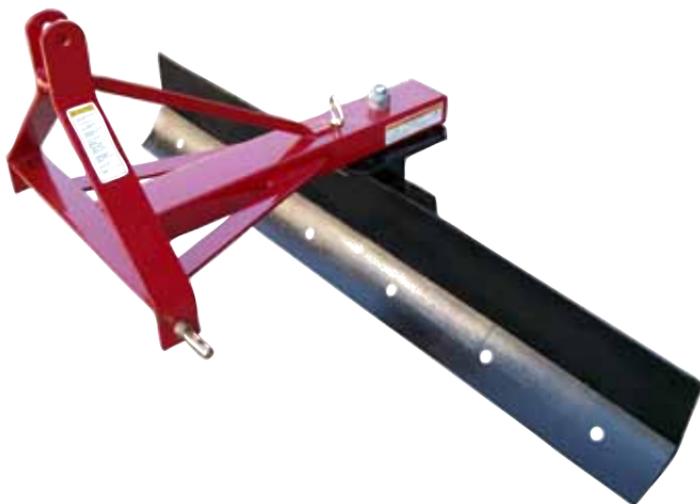

These affordable 3 Pt. rear scraper blades built by TITAN Implement are ideal attachment for tractors up to 45 HP. They have a reversible and a replaceable 6" cutting edge. They have a quick and easy left or right angle ability in forward or reverse position. Manufactured in U.S.A.

- * Cat. I – 3 Pt. Hitch
- * Rated for tractors 15 to 45 HP
- * Available in 4', 5', 6' & 7' working widths
- * Moldboard height 4' & 5' – 13" high , 6' & 7' – 14" high
- * 6" reversible & replaceable cutting edge
- * Angle adjustment 5 positions forward & reverse
- * Quick hitch compatible

MODEL	WIDTH	WEIGHT	LIST PRICE
4104	4' / 48" working width	158 lbs.	\$409
4105	5' / 60" working width	179 lbs.	\$429
4106	6' / 72" working width	202 lbs.	\$499
4107	7' / 84" working width	223 lbs.	\$579

REAR SCRAPER BLADES 3 Pt. 4400 Series



These affordable 3 Pt. rear scraper blades built by TITAN Implement are ideal attachment for tractors up to 65 HP. They have a reversible and a replaceable 6" cutting edge. They have a quick and easy left or right angle ability in forward or reverse position. They also offer offset and tilt adjustment. Manufactured in U.S.A.

- * Cat. I – 3 Pt. Hitch
- * Rated for tractors 35 to 65 HP
- * Available in 5', 6' & 7' working widths
- * Moldboard height 15.5" high
- * 6" reversible & replaceable cutting edge
- * Angle adjustment 5 positions forward & reverse
- * Tilt adjustment 3 positions
- * Offset adjustment 5 positions
- * Quick hitch compatible

MODEL	WIDTH	WEIGHT	LIST PRICE
4405	5' / 60" working width	323 lbs.	\$859
4406	6' / 72" working width	340 lbs.	\$919
4407	7' / 84" working width	358 lbs.	\$999

REAR SCRAPER BLADES

Heavy Duty



These heavy duty rear scraper blades are designed to give you the quality, dependable performance that you require. They come with Category 1 and 2, 3 Pt. hitch for 35 to 85 HP. These units come equipped with quick tilt, angle and offset manual adjustments. A parking stand is standard.

- * HP Requirements: 35-85
- * Tilt adjustments: 15-16° right or left
- * Offset adjustments: 15-30° right or left
- * Moldboard thickness: 1/4"
- * Moldboard height: 17"
- * Reversible 1/2" x 6" cutting edge
- * Angle adjustment 15° - 16° - 45° forward or reverse
- * Cat. 1 and 2, 3 Pt. hitch

MODEL	WIDTH	WEIGHT	LIST PRICE
GB484	7'	576 lbs.	\$2125
GB496	8'	652 lbs.	\$2199

SCRAPER BLADE HD HYDRAULIC 3 PT.



These heavy duty 3 pt. hitch rear scraper blades come standard with one hydraulic cylinder (with hydraulic hoses) for angling. They can offset and tilt manually, an optional hydraulic tilt kit is available. The blade cannot be reversed to push. These blades are built heavy to handle your roughest conditions.

- * Cat II 3 Pt hitch
- * 90 HP rated
- * 19" high moldboard
- * 1/4" thick moldboard
- * 6" reversible cutting
- * Comes with hydraulic hoses & coupler plugs
- * Angles Hydraulically
- * Offsets & tilts manually
- * Optional hydraulic tilt kit available

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
BRB908	8'/96" 3 Pt. HD Scraper Blade	904 lbs.	\$2699
BRB909	9'/108" 3 Pt. HD Scraper Blade	1050 lbs.	\$3499

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
BRB009HC	Hydraulic Tilt Kit (Includes hydraulic cylinder & hoses)	28 lbs.	\$699

SNOW PLOW GARDEN TRACTOR & ATV

Agri-Fab
Lawn Care Made Easy



The patented NORDIC PLOW is a front mount blade made of high impact injected molded plastic and utilizes a “round” lower edge. This makes the NORDIC PLOW available for year round use. It glides easily over grass and paver bricks, so you can push dirt, sand or mulch as well as snow. The NORDIC PLOW adjusts/angles left or right with a release pin. It can also be raised or lowered manually, due to it’s lightweight design with a hand strap. On ATV’s you can utilize your front mounted winch for raising and lowering. The NORDIC PLOW includes universal fit mounting brackets to fit most traditional lawn & garden tractors (48” wide blade) and ATV’s (48” wide blade)

- * **Manufactured of high impact injected molded plastic**
- * **Light weight**
- * **48” wide blade for lawn & garden tractor includes universal lawn & garden tractor mounting brackets**
- * **48” wide blade for ATV’s includes universal ATV mounting brackets**
- * **Angles left or right**
- * **Raises & lowers by hand strap**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450498	NORDIC 48” PLOW for standard lawn & garden	62 lbs.	\$575
450499	NORDIC 48” PLOW for standard ATV’s	82 lbs.	\$699



Has a Manure Spreader to fit your Operation?



Heavy Duty Models are available in 235,270, 310, 430, 560, and 660 bushel sizes.



Hydraulic Push 425 and 550 bushel spreaders feature either vertical or horizontal beaters.



"Top Shot" Side Discharge Manure Spreaders are available in 2000, 2600, 3400 and 4200 gallon models with the Optional Digi-Star Nutrient Tracker Scale System!

SNOW PLOW BLADES CLAMP-ON



These quality made clamp-on snow plows are made in Ontario Canada and available in a 5 ft. or 6 ft. working widths. Easily attached to your material bucket with 2 ratchet straps(not included) recommended for up to 35 HP. Available with your choice of 3/8" x 2-1/2" reversible and replaceable in UHMW (nylon) or hardened Steel wear edge.

- * 11 Gauge moldboard
- * 19" high moldboard
- * 5 x 3/16" Support ribs
- * 3/8" x 2-1/2" Nylon or Steel Wear Edge
- * Nylon Wear Edge perfect for interlocking or paved surfaces
- * Manual angle left or right
- * Optional Steel Side plates available
- * All welded construction
- * Extra Wide Blade/Frame Attachment location for added Rigidity
- * Quick hook-up Req'ds two ratchet straps (extra)
- * "Clean Out the Snow... Not Your Bank Account"

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
AP60U	5'/60" Snow plow with nylon wear edge	165 lbs.	\$1659
AP60S	5'/60" Snow plow with steel wear edge	165 lbs.	\$1659
AP72U	6'/72" Snow plow with nylon wear edge	175 lbs.	\$1785
AP72S	6'/72" Snow plow with steel wear edge	175 lbs.	\$1785

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
WE60/WE72/S/U	Replacement Steel (S) or Nylon (U) Wear Edge kit	\$329
SP60/SP72/S/U	Side Plates, Steel (S) or Nylon (U)	\$335

SNOW PLOW PUSHER CLAMP-ON



These quality made clamp-on snow pushers are made in Ontario Canada and available in a 5 ft. or 6 ft. working widths. Easily attached to your material bucket with 2 ratchet straps(not included) recommended for up to 35 HP. Available with your choice of 3/8" x 2-1/2" reversible and replaceable UHMW (nylon) or hardened steel wear edge.

- * 11 Gauge moldboard
- * 19" high moldboard
- * 3 x 3/16" Support ribs
- * 2 x 3/16" x 19" x 14" Solid Side Plates Welded
- * 3/8" x 2-1/2" Nylon or Steel Wear Edge
- * Nylon Wear Edge perfect for interlocking or paved surfaces
- * Comes with Steel Side Plates
- * All welded construction
- * Extra Wide Blade/Frame Attachment location for added Rigidity
- * Quick hook-up Req'ds two ratchet straps (extra)
- * "Clean Out the Snow... Not Your Bank Account"

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
P60U	5'/60" Snow plow with nylon wear edge	144 lbs.	\$1480
P60S	5'/60" Snow plow with steel wear edge	144 lbs.	\$1480
P72U	6'/72" Snow plow with nylon wear edge	154 lbs.	\$1599
P72S	6'/72" Snow plow with steel wear edge	154 lbs.	\$1599

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
WE60/WE72/S/U	Replacement Steel (S) or Nylon (U) Wear Edge kit	\$329

SNOW BLADES SKID STEER & FRONT TRACTOR LOADERS 5' & 6' Working Widths



- * Recommended HP 25 - 45
- * Maximum operating weight 4,500 lbs.
- * 2 trip springs for controlled break over in snow
- * Blade locks for light grading of loose dirt or gravel
- * 3/8" x 6" reversible hardened steel cutting edge
- * 6" x 1/2" thick rotating height adjustable skid shoes
- * 21" high moldboard
- * Manual angle adjustment is standard
- * Optional hydraulic angle adjustment kit available

MODEL	DESCRIPTION	WEIGHT	PRICE
SBS2160	5 ft. snow blade for compact tractors with loaders that utilize the "Universal" skid steer quick attach system	325 lbs.	\$2899
SBFL2160	5 ft. snow blade for compact tractors with loaders requiring optional interfacing quick attach brackets. Order extra	335 lbs.	\$2828
SBS2172	6 ft. snow blade for compact tractors with loaders that utilize the "Universal" skid steer quick attach system	353 lbs.	\$2999
SBFL2172	6ft. Snow blade for compact tractors with loaders requiring optional interfacing quick attach brackets. Order extra	360 lbs.	\$2779

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
360170	Optional hydraulic angle adjustment kit includes cylinders, fittings and hoses between cylinders. Does NOT INCLUDE hydraulic hoses or quick couplers to tractor remotes	40 lbs.	\$599
360065	Optional crossover relief valve protects blade from damage	7 lbs.	\$399
360220	Optional top deflector for 5ft blade		\$180
360223	Optional top deflector for 6ft blade		\$215
360235	Optional sight indicators		\$60

SNOW BLADES SKID STEER & FRONT TRACTOR LOADERS 7.5' & 9' Working Widths



- * Recommended HP 30 - 80
- * 2 trip springs for controlled break over in snow
- * Blade locks for light grading of loose dirt or gravel
- * 3/8" x 6" reversible hardened steel cutting edge
- * 6" x 1/2" thick rotating height adjustable skid shoes
- * 27" high moldboard
- * 5 degree lateral oscillation
- * Manual angle adjustment is standard 7.5 ft model
- * Optional hydraulic angle kit available for 7.5 ft model
- * Hydraulic angle adjustment standard on 9 ft model

MODEL	DESCRIPTION	WEIGHT	PRICE
SBS2790A	7.5 ft. snow blade for tractors with loaders or skid steers that utilize the "Universal" skid steer quick attach system	646 lbs.	\$3975
SBFL2790A	7.5 ft. snow blade for tractors with loaders requiring optional interfacing quick attach brackets. Order extra	660 lbs.	\$3889
SBS27108A	9 ft. snow blade for tractors with loaders or skid steers that utilize the "Universal" skid steer quick attach system Includes 360065 crossover relief valve	735 lbs.	\$5555
SBFL27108A	9 ft. snow blade for tractors with loaders requiring optional interfacing quick attach brackets. Order extra Includes 360065 crossover relief valve	748 lbs.	\$5465

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
360168	Optional hydraulic angle adjustment kit includes cylinders, fittings and hoses between cylinders. Does NOT INCLUDE hydraulic hoses or quick couplers to tractor remotes	40 lbs.	\$525
360065	Optional crossover relief valve protects blade from damage	7 lbs.	\$399
360227	Optional top deflector for 7.5 ft blade		\$245
360230	Optional top deflector for 9 ft blade		\$305
360235	Optional sight indicators		\$60

SNOW PUSHER

24 SERIES

"Universal" Skid Steer Mount



Engineered to fit Compact and Sub-Compact tractors, the WORKSAVER series of Snow Pushers are job matched to the tractor for maximum performance. 3 size models are available with the "universal" skid steer attach method, which is used on most compact loaders today. Available in widths of 5', 6' or 7' these snow pushers are offered with a 3/8" x 6" reversible alloy steel cutting edge. A CNC formed 10 gauge moldboard with 6" industrial C channel bracing on the backside for strength and durability. Adjustable skid shoes are standard equipment. Optional 1" x 6" reversible premium rubber cutting edge can be used on multiple surface types like decorative driveways, cobblestone or pavers.

- * 10 gauge moldboard
- * 6" industrial C channel provides solid support
- * 24" high x 24" deep pusher sides
- * Standard with 3/8" x 6" reversible alloy steel cutting edge
- * Adjustable skid shoes
- * "Universal" skid steer for easy attaching to compact tractor loaders
- * Designed for tractors up to 40 HP
- * Optional pull-back kits with rubber edge are available

MODEL	DESCRIPTION	WEIGHT	PRICE
SPS2460M	5' / 60" Snow Pusher	380 lbs.	\$1699
SPS2472M	6' / 72" Snow Pusher	420 lbs.	\$1825
SPS2484M	7' / 84" Snow Pusher	455 lbs.	\$1979

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
358095	60" pull back kit with rubber edge	79 lbs.	\$679
358105	72" pull back kit with rubber edge	95 lbs.	\$799
358115	84" pull back kit with rubber edge	108 lbs.	\$835

SNOW PUSHER 36 SERIES

Skid Steer and Euro/Global/Alo
Tractor Loader Mount



Designed for Skid Steers and Tractors equipped with a loader, the WORKSAVER 36 series Snow Pushers are job matched to the tractor for maximum performance. 2 size models are available with the "universal" skid steer or with Euro/Global/Alo attach method. Available in widths of 8' and 10', these snow pushers are offered with a 1.5" x 8" reversible premium rubber cutting edge. A CNC formed 7 gauge moldboard with two 4" industrial C channel bracing on the backside for strength and durability. 36" x 36" end plates of 5/16" material help retain snow as it is pushed forward without leaving a windrow. 4" wide adjustable skid shoes are standard equipment.

- * 7 gauge moldboard
- * Two 4" industrial C channel provides solid support
- * 36" high x 36" x 5/16" deep pusher sides
- * Standard with 3/8" x 6" reversible alloy steel cutting edge
- * Adjustable 4" x 36" skid shoes
- * "Universal" skid steer for easy attaching to skid steer & compact tractor loaders
- * Euro/Global/Alo quick attach for tractor loaders

MODEL	DESCRIPTION	WEIGHT	PRICE
SPS3696R	8' / 96" Snow Pusher with universal skid steer quick attach	815 lbs.	\$4119
SPS36120R	10' / 120" Snow Pusher with universal skid steer quick attach	905 lbs.	\$4419
SPG3696R	8' / 96" Snow Pusher with Euro / Alo quick attach	810 lbs.	\$4125
SPG36120R	10' / 120" Snow Pusher with Euro / Alo quick attach	900 lbs.	\$4419

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
358120	Pull-Back kit for 8ft pusher	190 lbs.	\$1199
358125	Pull-Back kit for 10ft pusher	230 lbs.	\$1439

BOX SCRAPERS

Standard Duty 3 Pt.

3100 Series



These affordable 3 Pt. box scraper blades built by TITAN Implement are ideal attachment for tractors up to 55 HP. They have a reversible and a replaceable 6" cutting edge. They come with scarifier shanks to help breakup hard packed ground. Manufactured in U.S.A.

- * Cat. I – 3 Pt. Hitch
- * Rated for tractors 15 to 55 HP
- * Available in 4', 5', 6', 7', & 8' working widths
- * Moldboard height 17" high
- * Overall depth 22"
- * 6" reversible & replaceable cutting edge
- * Quick hitch compatible

MODEL	WIDTH	# SCARIFIERS	WEIGHT	LIST PRICE
3104	4' / 48" working width	3	290 lbs.	\$829
3105	5' / 60" working width	4	323 lbs.	\$959
3106	6' / 72" working width	5	357 lbs.	\$1079
3107	7' / 84" working width	6	390 lbs.	\$1199
3108	8' / 96" working width	6	421 lbs.	\$1299

BOX SCRAPERS

Heavy Duty



These heavy duty series of box scrapers are available in widths up to 8'. They are ideal for the professional landscaper or farmer. They come complete with hinged rear moldboard for smoother grading and front and rear cutting edge with scarifier shanks. Category 1 pins on 5' and 6' models. Category 2 pins on 7' and 8' models. Horsepower rating of 30 to 90 HP.

- * Solid welded frame with welded A-Frame
- * Radius formed moldboard for efficient loading and unloading
- * High clearance scarifier bar for less trash build up
- * Hinged free floating rear cutting edge for smoother grading
- * HP Requirements: 30-90
- * Moldboard height 18"
- * Depth 21-1/2"
- * Two heat treated 1080 grade 1/2" x 6" reversible cutting edges
- * 3/8" thick end plates

MODEL	WIDTH	# SHANKS	LOAD CAPACITY	WEIGHT	LIST PRICE
TB260	5'	5	17.50 Cu. Ft.	586 lbs.	\$1699
TB272	6'	6	21.00 Cu. Ft.	661 lbs.	\$1845
TB284	7'	8	24.50 Cu. Ft.	841 lbs.	\$2055
TB296	8'	9	28.00 Cu. Ft.	904 lbs.	\$2339

BOX SCRAPERS

HYDRAULIC RETRACTABLE

TB30 Series



Tufline's TB30 series hydraulic retractable scarifier box blades are designed to break through tough ground and easily handle a variety of earth-moving jobs. The hydraulic scarifier bar makes adjustments from the operator's seat convenient. The scarifier bar is constructed of heavy duty welded mast and tubular reinforced steel for durability. The large capacity steel box has a dual sided hinged tailgate to allow for scraping, leveling, and back filling. The cutting edges are 1/2" x 6" steel and are reversible for extended life. The blade is 20" high and the end plates are 3/8" thick. 5' & 6' models are Cat. I – 3 Pt. hitch, 7' & 8' models are Cat. I/II – 3 Pt. hitch. Includes hydraulic cylinder & hose kit.

- * **Solid welded frame with welded A-Frame**
- * **Radius formed moldboard for efficient loading and unloading**
- * **High clearance hydraulically operated scarifier bar**
- * **Hinged free floating rear cutting edge for smoother grading**
- * **Two heat treated 1080 grade 1/2" x 6" reversible cutting edges**
- * **3/8" thick end plates**
- * **Hi-strength adjustable scarifier shanks**
- * **Designed for up to 80 HP**
- * **Moldboard height 20"**
- * **Box depth 22"**

MODEL	WIDTH	# SHANKS	LOAD CAPACITY	WEIGHT	LIST PRICE
TB3060H	5'	6	21.8 Cu. Ft.	725 lbs.	\$3699
TB3072H	6'	6	26.2 Cu. Ft.	815 lbs.	\$4025
TB3084H	7'	8	30.5 Cu. Ft.	1052 lbs.	\$4385
TB3096H	8'	8	34.9 Cu. Ft.	1146 lbs.	\$4615

BOX SCRAPERS

Hi-Capacity without Scarifiers



These box scrapers without scarifiers by **MONROE TUFLINE** are ideal for several applications. Use them for poultry houses, dairy barns and snow removal.

- * Solid welded frame with welded A-Frame
- * Radius formed moldboard for efficient loading and unloading
- * One heat treated 1080 grade 1/2" x 6" reversible cutting edges
- * Designed for up to 75 HP
- * Moldboard height 25"
- * Box depth 36"
- * Cat. 1 and 2, 3 Pt. hitch

MODEL	WIDTH	CAPACITY	WEIGHT	LIST PRICE
PHB84	7'	44 Cu. Ft.	684 lbs.	\$1829
PHB96	8'	50 Cu. Ft.	748 lbs.	\$1925

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SSPHB	Adjustable skid shoes (pair)	20 lbs.	\$155

Weights indicated are base machine weight, not shipping weight

BOX SCRAPER

CBS Series



The Monroe Tufline CBS Series corral box scraper takes the proven Tufline box scraper series to another level. These heavy duty implements are ideal for cleaning barn lots, poultry house, snow removal and general land leveling and grading. The CBS Series box scraper is constructed of 4" square tubing, 1/4" moldboard with 1/2" x 6" reversible cutting edge, and 3/8" endplates.

- * Constructed of 4" Square Tubing
- * 1/4" Thick Moldboard
- * 3/8" Thick End Plates
- * Heat Treated 1080 Grade 1/2 X 6" Reversible Cutting Edge
- * 27" High x 36" Inside Depth
- * Cat. I or II 3 Pt. hitch

MODEL	DESCRIPTION	HP REQ'D	CAPACITY	WEIGHT	PRICE
CBS84	7' box scraper	35-80 HP	44 Cu. ft	725 lbs	\$2275
CBS96	8' box scraper	45-100 HP	50 Cu. ft	815 lbs	\$2459
CBS120	10' box scraper	55-120 HP	60 Cu. ft	1010 lbs	\$2829

BOX SCRAPER PULL TYPE



The Monroe Tufline pull type box scraper takes the proven Tufline box scraper series to another level. These heavy duty implements are ideal for cleaning barn lots, driveway grading, filling pot holes and general land leveling and grading. With tilting ability this is an excellent machine for crowning gravel roads or lanes, shaping slopes or cutting ditches.

- * **Constructed of 4" Square Tubing**
- * **1/4" Thick Moldboard**
- * **3/8" Thick End Plates**
- * **Heat Treated 1080 Grade 1/2 X 6" Reversible Cutting Edge**
- * **Includes Hydraulic Cylinders and Hoses**
- * **Tilting Ability**
- * **Clevis Hitch**
- * **9.5L x 15" Implement Tires**
- * **Includes Implement Tongue Jack**

MODEL	DESCRIPTION	HP REQ'D	CAPACITY	WEIGHT	PRICE
DS196T	8' box scraper	35-80 HP	44 Cu. ft	1300 lbs	\$6769
DS1120T	10' box scraper	45-100 HP	50 Cu. ft	1450 lbs	\$6929
DS1144T	12' box scraper	55-120 HP	60 Cu. ft	1600 lbs	\$7155

LAND PLANES

LP Series



Tufline's LP Series land planes are ideal for gravel road reconditioning, driveway grading, pot hole filling, and general land levelling and grading. The LP series offers high strength reversible, double bevel cutting edges for unique dual blade grading performance. Constructed of heavy 3" square tubing, 3/16" thick plate & channel make the main frame rugged. Models 5' & 6' are Cat. I, 3 Pt. hitch. Models 7' & 8' are Cat. I - II, 3 Pt. hitch.

MODEL	WIDTH	WEIGHT	LIST PRICE
LP160	5'	482 lbs.	\$1745
LP172	6'	532 lbs.	\$1860
LP184	7'	598 lbs.	\$1959
LP196	8'	642 lbs.	\$2099

LP3 Series Heavy Duty



The LP3 series comes with two 1/2" x 6" cutting blades, with removal, rugged scarifiers to rip up any hard compacted ground. Then finish it with a smooth grade to flatten and level the soil. Constructed of 4" x 4" x 3/8" thick square tubing, along with 60" x 20" x thick side plates with adjustable skid shoes to set grading depth. Cat. I & II 3 Pt. hitch, quick hitch adaptable.

MODEL	WIDTH	SHANKS	WEIGHT	LIST PRICE
LP384	7'84"	4	908 lbs	\$3699
LP396	8'96"	6	1110 lbs	\$3899
LP3120	10'120"	8	1254 lbs.	\$4299

GRADER BLADE SKID STEER



The WORKSAVER 8 ft. six-way hydraulically controlled Skid Steer blade is controlled by an in-cab remote. The moldboard is shear pin protected to help prevent damage if an object is struck. The hydraulic cylinders work independently to allow the operator to adjust the moldboard to the task at hand. A proportional hydraulic valve provides precise control for maintaining grade. For even finer grade control, the unit can be paired with a Leica Laser System (sold separately). Flotation tires keep the machine moving smoothly over the worksite. In-cab controls allow the operator to adjust the angle and tilt functions from their seat. The SSGB8B is the perfect tool for maintaining a consistent grade when doing site prep work.

- * **15" high x 8 ft. long Moldboard**
- * **Moldboard is shear pin protected**
- * **1/2" x 6" reversible steel cutting edge**
- * **25 degree moldboard rotation**
- * **25 degree moldboard tilt**
- * **Large 18.5 x 8.5 x 8 tires**
- * **Greaseable tapered roller wheel bearings**
- * **Hardened steel bushings used on main pivot points**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SSGB8B	8' Hydraulic skid steer mounted grader blade	1195 lbs.	\$14,999

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
2507020	Laser Interface Junction Box Kit Allows the SSGB8B to interface with Leica Laser System (purchased separately from Leica)	3 lbs.	\$1059
812110	Laser Poles (Pair)	30 lbs.	\$245
811980	End Plates for blade (Pair)	60 lbs.	\$449

Special Order, Allow 30 days for delivery

POWERED LANDSCAPE RAKES




PTC Model for 3 Pt. Hitch




PSS Model for Skid Steer



PXS Model for "Mini" Skid Steer

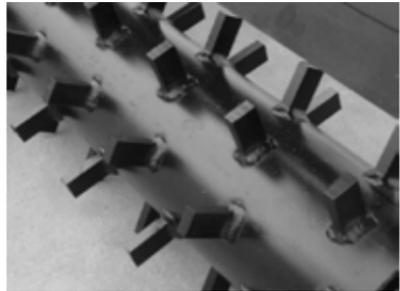

Sabre Tooth Rotor

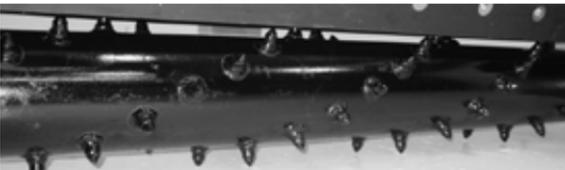

Carbide Rotor

POWERED LANDSCAPE RAKES



WORKSAVER's new Powered Landscape Rakes, remove debris or sod to prepare a seedbed surface to create a new lawn or renovate an existing lawn. These powered landscape rakes also pulverize and set grade on new construction sites. Models available in 3', 4', 5' & 6' working widths to fit mini/compact skid steers. 6', 7' & 8' for standard skid steers. 5', 6', 7' & 8' for tractors with 3 Pt. hitch 540 RPM PTO. Rakes are available with your choice of 2" "SABRE TOOTH" rotors or 1-3/4" "CARBIDE TOOTH" rotors. Replaceable bearing housings and triple sealbearings provide durability and serviceability. Call your dealer for other models and sizes not listed.

- * Working widths up to 8 ft. available
- * Available with your choice of 2" "Sabre Tooth" or 1-3/4" "Carbide Tooth" rotors
- * Quick flip (self storing) side shields allowing ease of wind rowing rocks and debris
- * Flip up gauge wheels with pneumatic tires
- * #80 roller chain drive, H.D. models double #80 chain drive
- * Environmentally friendly dry chain case
- * Replaceable bearing housing with triple sealed bearings
- * Standard Manual Angle adjustment, optional hydraulic angle kits available
- * Adjustable material bar
- * 540 RPM PTO models come with slip clutch PTO, and Cat. I, 3 Pt. Hitch
- * Hydraulic models to fit skid steers come with hydraulic hoses with connect under pressure couplers
- * Optional Skid shoes available

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
PXS410ST	4 ft. with "Sabre Tooth" rotor universal "mini" skid steer mount	526 lbs.	\$9999
PSS620ST	6 ft. with "Sabre Tooth" rotor universal skid steer mount	832 lbs.	\$11,375
PSHD865ST	8 ft. with "Sabre Tooth" rotor universal skid steer mount	1145 lbs.	\$14,890
PTC525ST	5 ft. with "Sabre Tooth" rotor 3 Pt. hitch PTO	627 lbs.	\$10,299
PTC725ST	7 ft. with "Sabre Tooth" rotor 3 Pt. hitch PTO	699 lbs.	\$11,699

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
360640	Hydraulic angle kit for PXS models with 2 sets of remotes	\$1499
360779	Hydraulic angle kit with solenoid for PSS/PSHD models with one set of remotes	\$2150

LANDSCAPE RAKES

3 Pt.



5100 Series Models



LRHD Model

These landscape rakes manufactured by WORKSAVER and TITAN Implement make a great landscape rake for your tractor. With HP ratings of up to 60 HP and working widths 4' to 8' we can match your requirements with the rake your tractor can handle. Units come with heat treated spring steel teeth spaced 1' apart. Gauge wheels are optional.

- * 1" x 5/16" x 27" tines
- * 5 backfill angle positions 4', 5', 6' & 7'
- * 5 forward angle positions 4', 5', 6' & 7'
- * 7 backfill angle positions LRHD models
- * 7 forward angle positions LRHD models
- * Turns 360°
- * Cat. I - 3 Pt. hitch

TITAN IMPLEMENT

MODEL	WIDTH	HP REQ'D	WEIGHT	LIST PRICE
5104	4' / 48"	45	158 lbs.	\$699
5105	5' / 60"	45	180 lbs.	\$799

WORKSAVER

MODEL	WIDTH	HP REQ'D	WEIGHT	LIST PRICE
MCR6	6' / 72"	40	187 lbs.	\$1055
MCR7	7' / 84"	40	199 lbs.	\$1099
LRHD7	7' / 84"	60	330 lbs.	\$1615
LRHD8	8' / 96"	60	365 lbs.	\$1735

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SGW10	Single gauge wheel kit	26 lbs.	\$349
DGW20	Dual gauge wheel kit	57 lbs.	\$635

MIXER - HYDRAULIC Skid Steer Mount



The **WORKSAVER** skid steer mixer has direct hydraulic drive of the gearbox which eliminates chain and sprocket maintenance and is ideal for all mixing applications and allows operator to mix, transport and place the concrete in the right location more efficiently. This unit has 5 Cu. Ft. capacity (1 bag mix) capacity of concrete.

SKID STEER MOUNT

- * Fits "Universal Style" skid-steer attachment system
- * Hydraulically driven gear box
- * Minimum hydraulic flow required 8 GPM
- * Gear ratio 3.18 : 1
- * All welded steel drum construction with internal paddles for uniform mixing and clean dumping
- * Includes flow control valve (On-Off) for easy operation
- * Hydraulic hoses included with connect under pressure flat faced couplers

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SS590	Skid steer hydraulic	395 lbs.	\$5385

CARTS

POLY

Agri-Fab
Lawn Care Made Easy™



These carts will perform a variety of tasks safely, reliably and efficiently. The clean ergonomic design and sturdy construction make these carts perfect for hauling yard refuse, firewood, topsoil, sand and gravel or any other job you need moved or carried. Available in steel or poly bed construction.

Model TC10P

List Price: \$249

- * 600 lb. weight capacity
- * Convertible push or tow dump cart
- * Fold behind tongue / drawbar assembly
- * One piece rustproof poly bed
- * Bed Size 30.5" W x 41" L x 11" H
- * Tire size 4.80" x 8" turf tire
- * Weight 67 lbs.



Model 450519

List Price \$525

- * 800 lb. / 15 cu.ft. Capacity Tow Cart
- * One Piece Poly Structural Foam Construction
- * 16 x 6.5 Knobby Tires with Grease Zerk in wheel hubs
- * Bed Size 38"W x 56"L x 14"H
- * 1" diameter heavy duty axle
- * Foot lever dumping mechanism
- * Weight 106 lbs.



Model 450175

List Price: \$629

- * 650 lbs. load capacity
- * Durable poly construction
- * Bed size 30"W x 45"L x 12"H
- * 18" x 6.5" all-terrain pneumatic tires
- * Wheels feature needle bearings and grease zerks
- * Weight 93 lbs.



See additional carts on following pages

CARTS STEEL



Model TC1018

List Price: \$269

- * 750 lbs. load capacity
- * Bed size 18 ga. 31"W x 42"L x 13"H
- * Tire size 16" x 4.8" x 8" pneumatic turf tires
- * Solid 3/4" dia. axle
- * Removeable tailgate
- * Easy single lever dump release
- * Weight 99 lbs.



Model TC17

List Price: \$459

- * 1500 lbs. load capacity
- * Bed size 16 ga. 37"W x 59"L x 16"H
- * Tire size 16" x 6.5" pneumatic turf tires
- * Removable tailgate
- * Easy single lever dump release
- * Weight 171 lbs.



Model TC174

List Price: \$675

- * 2000 lbs. load capacity
- * 4 wheel, front steerable axle
- * Bed size 16 ga. 37"W x 59"L x 16"H
- * Bed design: one piece
- * Tire size 16" x 6.5" - 8" pneumatic turf tires
- * Removable tailgate
- * Solid 3/4" steel axle
- * Weight 224 lbs.



See additional carts on following pages

Weights indicated are base machine weight, not shipping weight

ATV DUMP CARTS

STEEL



450240ATV



450350

AGRI-FAB'S heavy duty ATV dump carts are tough enough to handle your large loads at speeds up to 20 MPH. ATV carts come with needle bearing wheels, with grease zerks, on 1" diameter high carbon steel axles. Removable tailgate.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450240ATV	Single axle with 18 x 6.50-8 all terrain pneumatic tires 1200 lb. capacity Bed size 18 ga., 46"L x 34"W x 14"H	147 lbs.	\$749
450350	Tandem Axle 1000 lb. Cap. Bed Size, 16 ga. 32.5" W x 61" L x 12" H includes steel tube railing kit comes with 18 x 9.50 all-terrain pneumatic tires	230 lbs.	\$1239

TINE DE-THATCHERS

Pull Type



De-thatching is very important in environmentally conscious lawn care. These de-thatchers by **AGRI-FAB** do a gentle job of bringing matted layers of thatch and large clippings to the surface for a healthy lawn.

- * Twenty 3/16" heated tines on 40"
- * Twenty four tines on 48"
- * 40" and 48" working width available
- * 7" x 1.5" semi-pneumatic tires

MODEL	WIDTH	WEIGHT	LIST PRICE
4502941	40"	33 lbs.	\$135
4502951	48"	37 lbs.	\$195

LAWN SWEEPERS



- * 42" wide lawn sweep
- * 12.9 cu. ft. capacity
- * 10" diameter brush
- * 10-1/2" rubber tire

- * 48" wide lawn sweeper
- * 14.9 cu. ft. capacity
- * 10" diameter brush
- * 10-1/2" rubber tire

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TL31108	42" Pull type lawn sweeper	77 lbs.	\$315
TL31109	48" Pull type lawn sweeper	86 lbs.	\$359

LAWN SWEEPER



450352



450522

Make a clean sweep of leaves, grass, lawn debris and more with an AGRI-FAB lawn sweeper. These models make quick work of just about any pickup task and do a thorough job the first time around. Unique design makes dumping of debris easy too. Optional front mount de-thatching unit available.

450352

- * 6 – 12” diameter brushes
- * 11 x 2-1/2” aluminum wheels
- * 17 cu. ft. hopper capacity
- * 42” sweep width
- * Empty hopper from tractor seat
- * Adjustable brush height
- * Universal hitch easily & quickly adjusts to any tractor

450522

- * 6 – 12” diameter brushes
- * Flow thru hopper bag
- * 27 cu. ft. hopper capacity
- * 52” sweep width
- * 12” x 2.5” tire/wheels with ball bearings
- * Single center lever with preset height for brush height adjustment
- * Universal hitch easily & quickly adjusts to any tractor

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450352	42” Lawn Sweeper	94 lbs.	\$425
450522	52” Lawn Sweeper	90 lbs.	\$685

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
4503433	Front mount de-thatcher fits above lawn sweepers	23 lbs.	\$119

LAWN SWEEPER SMARTSWEEP



The NEW SmartSWEEP from Agri-Fab is designed to make sweeping up yard debris easier than ever. This unit doesn't skip, solving the #1 consumer frustration with current lawn sweepers. 25 cu. ft. hopper capacity. Exclusive patent pending offset hitch design allows users to simultaneously cut and sweep lawn clippings or leaves. Exclusive, patent pending ergonomic dumping mechanism, no more rope to pull. One button brush height adjustment, adjusts just the brush, not the whole unit.

- * 44" sweeping width
- * 25 cu.ft. hopper capacity
- * #4 - 12" diameter brushes
- * Offsetable hitch
- * Ergonomic dumping mechanism
- * One button brush height adjustment
- * Design allows sweeper to collapse for compact storage

MODEL	DESCRIPTION	WEIGHT	PRICE
450492	44" SmartSWEEP	94 lbs.	\$589

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
4503433	Front mount tine de-thatcher fits above "TOW TYPE" sweepers	23 lbs.	\$119

LAWN VACS

Agri-Fab
Lawn Care Made Easy



55249



55188

For any size yard, Agri-Fab's **Mow-N-Vac** or **Chip-N-Vac** offer proven performance. 80 MPH worth of suction provides enough power to collect large quantities of grass, leaves, twigs, pine needles, etc. that can be dumped effectively with any of Agri-Fab's vac systems. All units include a safety engine shut-off which prevents accidental engine start-ups, a universal fit mower deck adapter. Units fit only right hand discharge mid-mount mowers. Optional 65640 hose kit is required for front mount zero turn mowers.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
55188	Hard Top Mow-N-Vac with 208cc B & S engine with 2 year warranty. Large 26 bushel/32 cu.ft. capacity. Includes cart with durable vented hard top design.	340 lbs.	\$2215
55249	Hard Top Chip-N-Vac with 208cc B & S engine with 2 year warranty. Large 26 bushel/32 cu.ft. capacity, chips up to 2" Dia. brush. Includes cart with durable vented hard top design	384 lbs.	\$2699

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450253	5" x 12' long, remote hose kit for vacuuming flower beds and from under trees	19 lbs.	\$259
65640	Hose extension kit with adapter for zero turn. Front mount mower deck		\$125

Weights indicated are base machine weight, not shipping weight

SMARTLINK ATTACHMENTS

Agri-Fab
Lawn Care Made Easy™



450473
Master Platform



450459



450458



450457

450474
Core/Plugger Aerator

The NEW SmartLINK system from Agri-Fab allows users to switch from one lawn implement to another in seconds without tools. Purchase the "master platform" and then any of the four different attachments, 40" TURF SHARK™ Curved Blade Aerator, 40" Core/Plugger Aerator, 40" Tine dethatcher or 40" x 18" Poly Lawn Roller as required or purchase all five pieces. Dethatch, roll, spike or aerator your lawn with the pull type master platform that can be easily hooked to any lawn tractor. SmartLINK lawn care system provides unprecedented versatility and can be easily stored.

- * Master platform provides durable heavy gauge steel deck and drawbar
- * Universal hitch fits any lawn tractor
- * Rustproof aerator/core knives allows air, water and nutrients to reach into the soil
- * Patented Turf Shark™ spike aerator designed for thorough soil penetration without messy soil plugs
- * Tine dethatcher effectively loosens and lifts thatch for healthier lawn growth
- * 40" x 18" poly lawn roller weighs up to 400 lbs, levels sod, packs fresh seeding, levels frost heaving ground and more

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450453Q	Master Platform with ALL 4 Attachments	158 lbs.	\$825
450473	Master Platform	60 lbs.	\$219
450474	40" Core/Plugger Aerator	29 lbs.	\$145
450458	40" Turf Shark™ Curved Blade Spike Aerator	23 lbs.	\$130
450457	40" Tine Dethatcher	19 lbs.	\$119
450459	40" Poly Lawn Roller Capacity 400 lbs	27 lbs.	\$219

CORE /PLUG AERATOR Pull Type

Agri-Fab®
Lawn Care Made Easy™

**YARD
COMMANDER™**



450383



TL31202

Core aerating is increasingly important in aesthetically and environmentally conscious lawn care. These core aerators by **AGRI-FAB** and **YARD COMMANDER** are perfect for highly compacted clay soil conditions allowing seed, fertilizer, air and water to reach deep into the lawns roots.

450383

- * 48" working width
- * 3" aeration depth
- * 32 heat treated points
- * Tray capacity 140 lbs.
- * 10" x 4" pneumatic tires
- * Single hand lift lever

TL31202

- * 60" working width
- * 3" aeration depth
- * 40 heat treated points
- * Tray capacity 200 lbs.
- * 10" x 4" pneumatic tires
- * Single hand lift lever

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450383	Agri-Fab 48" 32 plug core aerator	91 lbs.	\$319
TL31202	Yard Commander 60" 40 plug core aerator	136 lbs.	\$329

Weights indicated are base machine weight, not shipping weight

SPIKE AERATOR



Aeration allows water, sunlight, fertilizer and nutrients to reach the grass roots for a healthy lawn. The curved spike aerators spike wheel provides the perfect amount of penetration and soil plug removal without the mess associated with plug aerators.

- * Simple to use single lever wheel engaging for easy transport
- * 40" Weight tray
- * 12-9" rust-resistant, galvanized curved discs

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450369	40" "Turf Shark" Curved Spike Aerator	54 lbs.	\$255

LAWN ROLLERS



450216 Shown (Steel)



LRP2448B Shown (Poly)

Uneven ground from frost heaving, newly sewn lawns or sod that just needs to be packed down, are ideal jobs for these **AGRI-FAB** lawn rollers. These steel or poly tow rollers can be used for light or heavy duty performance.

MODEL	ROLLER DRUM	WEIGHT W/WATER	SHIPPING WEIGHT	LIST PRICE
LRP2448B	POLY 24" dia. x 48" wide	825 lbs.	82 lbs.	\$389
450179	STEEL 24" dia. x 36" wide	640 lbs.	110 lbs.	\$339
450216	STEEL 24" dia. x 48" wide	910 lbs.	170 lbs.	\$445

DRUM SPIKER



The YARD COMMANDER Tow Behind Drum Spiker is a versatile implement for Aerating and lawn compaction of frost heaves in the spring of the year. Helps nutrients get into soil and down to the roots. This unit can be attached to any lawn and garden tractor or ATV.

- * Pull/Tow Type
- * 60" x 14" Diameter Drum
- * 126 Steel Spikes Penetrates the Ground up to 2-1/2"
- * Drum holds 31 Gallons of Water
- * Adds 460 lbs. of Weight

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TL31112	60" Drum spike aerator	186 lbs.	\$549

SPREADERS

Broadcast - Push Type



450388



4502142
w/65353

Broadcast spreaders spread everything from fertilizer, seed, ice melters and more. Solid construction and reliable design ensures even and continuous flow and spread of materials, eliminating streaks. Hoppers constructed of weather resistant polyethylene.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450388	85 Lb. Capacity 10" x 4" pneumatic tires. Up to 10' Spread width	20 lbs.	\$115
4502142	100 Lb. Capacity 10" x 4" pneumatic tires. 8' to 10' spread width	33 lbs.	\$210

OPTION:

MODEL	DESCRIPTION	LIST PRICE
65353	Deflector skirt for ice melter	\$39
40883	85 lb - 100 lb hopper cover	\$15

SPREADERS

Broadcast - Tow Type



4502152



450315

Broadcast spreaders spread everything from fertilizer, seed, ice melters and more. Solid construction and reliable design ensures even and continuous flow and spread of materials, eliminating streaks. Hoppers constructed of weather resistant polyethylene. On/Off Control is accessible from tractor seat

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450315	85 lbs. Cap 10" x 4" pneumatic tires Up to 10' Spread Width	17 lbs.	\$115
4502152	100 Lb. Cap. 10" x 4" pneumatic tires 8' to 10' spread width	33 lbs.	\$210

OPTION:

MODEL	DESCRIPTION	LIST PRICE
65353	Deflector kit for ice melter	\$39
40883	85 lb - 100 lb hopper cover	\$15

SPREADERS

SmartSPREADER



450463



450462

- * 130 lb. capacity
- * Unique, user friendly spreader-setting knob for precise fertilizer application
- * Spring loaded ON/OFF lever

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450462	SmartSPREADER Push	37 lbs.	\$309
450463	SmartSPREADER Tow	37 lbs.	\$309

OPTION:

MODEL	DESCRIPTION	LIST PRICE
41316	Hopper cover	\$15
67660	PRO KIT for 450462 Includes adjustable shield, cushion handles & hopper cover	\$119
67663	SPREADER GRATE KIT for 450462	\$75

SPREADER

Broadcast

Pull-Type

Agri-Fab®
Lawn Care Made Easy™



Agri-Fab broadcast spreaders spread everything from fertilizer, seed, ice melter and more. Solid construction and reliable design ensures even and continuous flow and spread of materials eliminating streaking. Hopper construction of weather resistant polyethylene. On/Off control is accessible from garden tractor seat.

- * 175 lb. Capacity
- * Spread width up to 12 ft. depending on material being spread
- * Large 15" x 6" pneumatic turf tires with ball bearing hubs
- * Poly hopper and spread plate
- * Enclosed gear box
- * Heavy duty steel gears
- * Includes hopper cover

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450329	175 lb. capacity, tow type Fertilizer Spreader	57 lbs.	\$455

SPREADERS

ATV, UTV or TRUCK MOUNT



The SWISHER COMMERCIAL PRO spreaders are available in a ATV mount or truck mount. Both units are universal fit, with a heavy duty double ball bearing, permanent magnet DC 12 volt motor. Control the flow rate with operator accessible adjustable feed gate. All control plates are zinc plated for corrosion protection. Adjustable spread width 4' to 16' depending on material to be spread. Spreads grass seed , fertilizer, ice salt & ice melt.

ATV Model

- * Universal fit
- * On and off switch is frame mounted
- * 12 volt motor
- * 8" easy fill spin-on cap with breather
- * Opaque 15 gallon poly tank
- * 150 lb. capacity

UTV-TRUCK Model

- * Universal fit
- * Mounts to existing 2" x 2" receiver
- * 12 volt motor
- * 8" easy fill spin-on cap with breather
- * Opaque 25 gallon poly tank
- * 300 lb. capacity

MODEL	DESCRIPTION	WEIGHT	PRICE
19920	ATV Mount Spreader 150 lb. capacity	45 lbs.	\$499
20110	UTV-Truck Mount Spreader 300 lb. capacity	70 lbs.	\$629

SPREADERS

Broadcast 12 Volt



The Fimco ATV spreader has a 2.2 cubic foot poly hopper which has a capacity of up to 145 lbs. depending on type of material. Stainless steel radial 6 blade fan/spinner can spread material up to 45 feet (depending on type of material). Can be used with fertilizer, seed, powders, granular, insecticides, fungicides and herbicides & ice melter.

- * 2.2 cu. ft. rust proof poly hopper
- * Up to 145 lb. capacity
- * 5 ft. to 45 ft. variable spread width
- * Stainless steel radial 6 blade fan / spinner
- * 12 volt motor with variable speed control with On-Off switch
- * Universal ATV mounting
- * Pull type tire size 15/600 x 6

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ATVDMS12V	ATV mounted spreader	56 lbs.	\$619
DMSTR12V22	ATV pull type spreader	59 lbs.	\$629

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
5058193	Clear hopper cover	\$10
5301901	2" receiver hitch	\$165

DROP FERTILIZER SPREADER

Agri-Fab
Lawn Care Made Easy



450288

The Agri-Fab drop spreader is the proper tool for overseeding, weed control, fertilizing and more. You can count on the Agri-Fab spreader to help. Designed for easy operation and even coverage, our spreaders will give you great results time after time.

- * 175 lbs. capacity
- * 42" spread width
- * 3/4" axle
- * Covers approx. 40,000 sq. ft.
- * Premium galvanized steel agitator.
- * Spreader settings for a multiple of materials.
- * Ground Drive

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450288	Drop fertilizer spreader 14" x 4" pneumatic tires	45 lbs.	\$350

SPIKER SEEDER DROP SPREADER



The YARD COMMANDER Tow Behind Spiker/Seeder/Drop Spreader is a versatile implement for spreading seed, fertilizer, or for over seeding lawns. This unit can be attached to any lawn and garden tractor or ATV.

- * **Tow Type**
- * **175 lb.(80 L) capacity**
- * **Approximate coverage 40,000 sq. ft.**
- * **Spread Width 40"**
- * **Poly Hopper is Rust Proof**
- * **12 Spike Wheels, 7" Diameter**
- * **3.50 - 4 x 10" Pneumatic Tires**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TL31519	Spiker/Spreader/Over Seeder	70 lbs.	\$369

SPREADER

3 Pt. Hitch, 12 volt



The FIMCO 3 Pt. hitch spreader features a tough, corrosion - resistant 5.0 cu.ft. / 200 lb. capacity poly hopper with a stainless steel radial six blade spreading fan. Adjustable slide gate allows you to control the amount of material you're spreading, and can be opened or closed with a simple turn of the on/off handle. The FIMCO spreader uses a variable-speed 12 volt motor (with on/off switch) that lets you change the spread width from 5 ft. to 45 ft. (depending on material being spread).

- * Poly Hopper
- * 5.0 Cu.ft. / 200 lb. capacity
- * CAT I, 3 Pt hitch
- * Stainless steel radial six blade spreader fan
- * 12 volt motor
- * Variable speed controller
- * Wiring harness to power supply

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
DMS3PT12V50	Spreader 200 lb. capacity 12 volt	125 lbs.	\$725

ATV SEEDER & SPREADER



The WORKSAVER ATV Seeder & Spreader helps get a head start early in the season for seeding pastures or cover crops and fertilizers. The 12 volt electric ATV seeder has a 1 bushel poly hopper to promote longer life. The adjustable flow control mounted on the ATVK400 is easy to adjust and provides better control over material flow. Universal mounting fits most makes and models of ATV's.

- * 12 volt electric motor with variable speed control
- * 1 bushel poly hopper is translucent for easy monitoring of hopper material level
- * Snap-on lid to prevent seed from blowing out and keep moisture out
- * Proven 2-opening seed gate that closes tightly and reopened to the same setting
- * A mud and water shield to protect the spreader fan
- * Complete wiring harness with simple clips to fasten to battery terminals
- * Lightweight, high strength design allows operator to easily mount or dismount unit from ATV
- * Flow control lever and seeding chart is easily accessible to the operator
- * Universal mounting fits most makes and models of ATV's
- * Mounts to rear rack of ATV

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ATVK400	ATV Seeder & Spreader	42 lbs.	\$699

SPREADERS GROUND DRIVEN



This fertilizer spreader, is manufactured to high standards and will hold up to the rigors of your everyday needs. Adjustable tow bar allows the spreader to be used on multiple hitch heights. High flotation tires on a wide base gives greater stability over many types of terrain. Works for fertilizer, seed, and ice melter spreading applications.

- * Heavy Duty Steel Gears in sealed gearbox
- * Adjustable Towing Hitch
- * High flotation Tires 13 x 5.00 – 6
- * Powder coated painted frame and hopper
- * One piece steel hopper
- * Left – Centre – Right Spread Pattern
- * Poly Spreading Disc
- * Optional Spread Deflector Shield Available
- * 225 lb / 105 litre hopper capacity

MODEL	HOPPER CAPACITY	SPREADER WIDTH	HOPPER HEIGHT	WEIGHT	LIST PRICE
PTS100	225 lbs	20 ft	40"	100 lbs	\$750

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
PTS001	Deflector Shield, reduces spread width	\$95
PTS002	Hydraulic gate opener	\$399

SPREADERS

Baby-Hop

Ground Driven



Easy connecting pull type hitch, ground controlled distribution, and rugged construction makes the **BEFCO** Baby-Hop spreader the perfect companion for your ATV, riding mower or small garden tractor. Ideally suited for even distribution of fertilizer, seed, salt and dry sand. Baby-Hop spreaders come complete with:

- * One piece seamless painted steel hopper
- * Even spread left-center-right pattern
- * High flotation air tires
- * 103-130: 13x5.00-6
- * 106-130: 16x6.50-8
- * Easy connecting pull type hitch
- * Sturdy tubular frame
- * Hopper levelling adjustment
- * Sealed heavy duty gearbox

MODEL	HOPPER CAPACITY CU.FT/LBS	SWATH SPREAD	WEIGHT	LIST PRICE
103-130	3.5 / 226	20'	62 lbs.	\$999
106-130	5.6 / 362	20'	84 lbs.	\$1329

NOTE: Poundage capacity calculated at 13-13-13 fertilizer weight of 64 Lbs./Cu. Ft.

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
AA1-120	Deflector shield-reduces spreading width to approximately 4'	\$139

SPREADERS

Spin Type

Steel



These quality spreaders are designed for tractors from 16 to 30 HP, 540 PTO RPM, Category 1, 3 Pt. hitch. Ideal for distribution of fertilizer, seed, salt, dry sand and much more. Spreaders come complete with:

- * **HP Requirements: 16-30, 540 RPM**
- * **One piece seamless painted steel hopper**
- * **Three different spread patterns**
- * **Heavy duty shielded PTO shaft (1-3/8" ASAE Cat. 1)**
- * **Sturdy tubular frame**
- * **Selective double gate opening**
- * **Sealed heavy duty gearbox**
- * **Fixed agitator**
- * **Cat. 1, 3 Pt Hitch on all models**

HOPPER CAPACITY			
MODEL	CU.FT/LBS	WEIGHT	LIST PRICE
203-120	3.5 / 226	81 lbs.	\$999
206-121	4.8 / 311	102 lbs.	\$1029
209-121	10.6 / 678	125 lbs.	\$1049
212-121	17.6 / 1130	136 lbs.	\$1099

NOTE: Poundage capacity calculated at 13-13-13 fertilizer weight of 64 Lbs./Cu. Ft.

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
009-9524	Deflector shield fits model 203 & 206	\$135
009-9979	Tumbling style agitator 203 model only	\$115
009-9638	Deflector shield fits model 209 & 212	\$265
009-9978	Tumbling style agitator for 206, 209 and 212	\$115
AA4-120	Siderow discharge for model 209 & 212 only	\$579

Weights indicated are base machine weight, not shipping weight

SPREADERS

SPIN TYPE - POLY HOPPER



BRI poly hopper spreaders are available in two models, Cat. I 3 Pt hitch, 540 RPM PTO. Bottom opening gates ensure a constant and accurate flow of material to spinner. Variable positioning gate openings and fin adjustments allow material to drop on different positions of the spinning disc, therefore giving a left-right-center spread pattern.

- * **Durable no-rust Poly Hopper**
- * **Cat. I 3 Pt. Hitch**
- * **540 RPM PTO**
- * **Simple adjustable left-right-center spread pattern**
- * **Galvanized spin disc with multi-positioning adjustable fins**
- * **Maximum spread pattern 49 feet depending on material being spread**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SSP250	575 LB. / 196 Litres	123 lbs.	\$849
SSP400	860 LB. / 293 Litres	130 lbs.	\$875

SPREADERS

Turbo Hop 3 Pt.



301-300 Shown



303-600 Shown

Turbo Hop spreaders are designed for tractors from 20 to 60 HP, 540 PTO RPM, with a maximum spread swath of 40'-46'. Ideal for distribution of fertilizer, seed, salt, dry sand where accuracy and precision in application is needed. Turbo Hop spreaders come complete with:

- * HP Requirements: 20-60, 540 RPM
- * Polyethylene hopper
- * Spreader spouts made of nylon and reinforced fiberglass
- * Stainless steel opening control disc
- * Cast steel anti-wear agitator
- * Heavy duty shielded PTO shaft (1-3/8" ASAE Cat. 1)
- * Sturdy tubular frame
- * Micrometric flow control adjustment
- * Heavy duty cast steel gearbox in oil bath
- * 301-300-400 cone type hopper Cat. I / II 3Pt. hitch
- * 303-600-999 retangular type hopper Cat. I / II 3Pt. hitch

MODEL	HOPPER CAPACITY		SPREAD		LIST PRICE
	CU.FT/LBS		WIDTH	WEIGHT	
301-300	9.00 / 576		17'- 47'	256 lbs.	\$3799
301-400	12.80 / 820		17'- 47'	267 lbs.	\$4199
303-600	20.6 / 1318		17'- 47'	419 lbs.	\$5099
303-999	36.1 / 2310		17'- 47'	455 lbs.	\$6199

NOTE: Poundage capacity calculated @ 13-13-13 fertilizer weight of 64 lbs. per cubic foot

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
001-4984	Locking Nut for Spout	\$69
009-5370	Left ONLY & Right ONLY Directional Attach	\$109
009-9451	Rubber Insert for Damp Material for 301	\$159
009-9913	Filter Grate for 301 models	\$665
009-5410	Filter Grate for 303 models	\$629
009-9452	Short Spout for Sand and Salt	\$445
009-9453	Agitator Extension for 301 models	\$265
009-9454	Agitator Extension for 303 models	\$265
009-9456	Hydraulic Controls for 301 models	\$965
009-9455	Hydraulic Controls for 303 models	\$1149

Weights indicated are base machine weight, not shipping weight

ZA-M FERTILIZER SPREADERS

ONLY AVAILABLE THROUGH STOCKING DEALERS



SBS – Soft Ballistic System

Mineral fertilizer needs to be gently handled to ensure a precise distribution and an exact placement to the plant over the entire working width. Fertilizer, which has been damaged while going through the spreader, will not be precisely distributed. The AMAZONE Soft Ballistic System is integrated into all ZA-M mounted spreaders where the agitator, metering components and spreading discs are all optimally matched to protect the fertilizer and ensure even distribution over the entire working width.

Stainless Steel Spreading System

The entire spreading system of the ZA-M spreaders is made from stainless steel: Hopper tips and agitator spirals. Entire base plates with setting rate slides and hydraulic shutters. Spreading discs with the spreading vanes Fully enclosed deflector plates

Oil Bath Gearboxes

The oil bath gearboxes have proven to be the indestructible heart of the AMAZONE twin disc centrifugal spreader. Repetitive test procedures are conducted. They are maintenance free and provide integrated overload safety to prevent gearbox damage. Rate Adjustment: Simple – Reliable – Precise The spreading rate and the working width are preselected from the extremely-comprehensive setting chart. Clear easy to read scales help you to set the spreading rate exactly using the shutter slide.

The Double Shutter Control System

The rate shutters and on-off shutters can be operated independently of each other. The double acting hydraulic slides ensure an instantaneous opening and closing of the shutters at ends of the field.

OM Omnia-Set Spreading Discs

The OM Omnia-Set spreading discs are equipped with pivoting spreading vanes that generate a spread pattern that is extremely precise and safe. With the aid of an easily readable scale that is in the users field of view, the spreading vanes can be adjusted easily and exactly without tools. AMAZONE provides comprehensive setting charts for all kinds of fertilizer and seed. The OM Omnia-Set spreading discs are made from stainless steel and are easily installed.

ZA-M FERTILIZER SPREADERS



Today's farmer and agricultural custom operators need fertilizer spreaders where, safety, accuracy and dependability come first. AMAZONE is safe in every respect: on the road, in the field, during adjustment and while spreading. It is not just about saving money, but also protecting the environment and ensuring safety on the road as well as accuracy in the field with accurate spreading of your fertilizer.

- * **Important Parts in Stainless Steel**
- * **Square Shallow Twin Tip Hopper**
- * **Indestructible Oil Bath Gearboxes**
- * **c/w Stainless Steel OM 24-36 Spreading Discs**
- * **Stainless Steel Guard Tube to Protect Spreading Discs**
- * **Spiral Agitators Ensure a Very Even Fertilizer Flow**
- * **Hydraulic Single Shutter Slide Control for the Right or Left Hand Side**
- * **Standard with Traffic Lights and Warning Plates**
- * **Filling Sieve against Foreign Particles**
- * **540 RPM PTO Shaft**
- * **CAT II 3 Pt. Hitch**
- * **Maximum Payload up to 6835 lbs. (3100kg)**
- * **Calibration Device for the Simple Check of the Pre-Adjusted Spread Rate**
- * **Comprehensive Setting Charts for all Types of Fertilizer Calculation Disc Rule to Determine the Required Shutter Slide Position**
- * **Optional Spreading Disc, Hopper Extensions, Hopper Covers, Border Spreading Devices available**

MODEL	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
ZAM1501	1500 L / 395 gal capacity c/w spreading width of 24 m to 36 m depending on material being spread	337 kg	\$9999

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
S500	922782 500 L / 130 gallon hopper extension	27 kg	\$725
L1000	935040 1000 L / 265 gallon hopper extension	57 kg	\$1629
927784	Hopper cover for spreaders without extensions or with S500 hopper extensions only	26 kg	\$1125
927785	Hopper cover for spreaders with L1000 extensions	29 kg	\$1209
	OM Omnia-Set Spreading Discs (pair) OM10-12, OM10-16, OM18-24	12.5 kg	PRICE ON REQUEST
1733010	Boundry spread deflector Left Hand Side	5 kg	\$249
931810	Rolling parking stand	24 kg	\$619

Weights indicated are base machine weight, not shipping weight

SPOT & ATV SPRAYER



LG15EC



ATV25700QR

15 Gal. Spot Sprayer

- * 15 Gal. (U.S.) corrosion resistant polyethylene tank
- * Full drain out capabilities with molded in drain port, cap & tether
- * Large sump pickup
- * 5" fill lid with tether
- * 12 volt (demand) diaphragm 1.0 GPM 35 PSI pump
- * 18" lever handgun with adjustable nozzle with 15 ft. of hose
- * Max. horizontal throw 25 ft.
- * Max. vertical throw 12 ft.

25 Gal. ATV Sprayer with Boom

- * 25 Gal. (U.S.) corrosion resistant polyethylene tank
- * Universal ATV mounting brackets
- * Full drain out capabilities with molded-in drain port, cap & tether.
- * 12 volt diaphragm demand style pump, 2.1 GPM. Pressure range 0 – 60 PSI
- * Adjustable Pressure
- * Pressure Gauge
- * 18" Handgun with adjustable nozzle & 15 ft. of hose
- * 7 Nozzle, 3 section folding boom 140" spray coverage Includes nozzles and screens
- * NEW QUICK RELEASE boom

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
LG15EC	15 gal. spot sprayer with hand gun & 15 ft. hose	18 lbs.	\$175
ATV25700QR	25 gal. ATV sprayer with 7 nozzle 3 section boom (140") with hand gun & 15 ft. hose	66 lbs.	\$629

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
7772014	Multi lid measuring device	\$33

ESTATE SPRAYERS

Tow Type



ATVTS6012V



LG30TRL



TR40EX

- * Measured in U.S. gallon / litres
- * Corrosion resistant polyethylene tanks
- * Lower tank profile for improved stability
- * Full drain out capability with molded in drain port, cap & tether
- * Full length drain sump
- * Large pickup sump
- * 5" fill lid with tether
- * Both gallon (US) and litre fluid volume indicator
- * 30 gallon includes lever handgun with adjustable nozzle and 15ft of hose
- * 40 & 60 gal. includes deluxe pistol grip handgun with adjustable nozzle and 25ft of hose
- * 30 & 40 gallon: 12 volt 2.1 gpm, 60 psi diaphragm pump
- * 60 gal. 12 volt 3.8 gpm, 45 psi diaphragm pump
- * "On-Off" Switch
- * Includes spray boom (includes nozzles and screens):
 - 30 gallon, 2 nozzle 80" coverage
 - 40 gallon, 5 nozzle 100" coverage
 - 60 gallon, 7 nozzle 140" coverage

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
LG30TRL	30 gallon, 2 nozzle, 80" spray coverage 12V pump with 13" pneumatic tires	62 lbs.	\$559
TR40EX	40 gallon, 5 nozzle, 100" spray coverage 12V pump with 15/600 x 6 pneumatic tires	205 lbs.	\$1149
ATVTS6012V	60 gallon, 7 nozzle, 140" spray coverage 12V pump, 18 x 9.5 x 8 pneumatic tires	295 lbs.	\$1839

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
7772014	Multi lid measuring device	\$33

Weights indicated are base machine weight, not shipping weight

ATV & UTV SPRAYERS



- * Corrosion resistant polyethylene tanks
- * Lower tank profile for improved stability
- * Full drain out capability with molded in drain port, cap & tether
- * Full length drain sump
- * Large pickup sump
- * 5" fill lid with tether
- * Both gallon (US) and litre fluid volume indicator
- * Includes 5 nozzle, 100" spraying width, 3 section folding boom
- * Includes deluxe pistol grip handgun with adjustable nozzle and 25 ft. of hose
- * 12 volt, 2.1 gpm, 45 psi diaphragm pump
- * Pressure gauge - adjustable pressure
- * "On-Off" switch
- * Steel skid type frame assembly

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
UTL405	40 gal. UTV with 5 nozzle, 3 section boom 12 volt, 2.1 GPM pump. Mounts in rear box	117 lbs.	\$1049

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
7772014	Multi lid measuring device	\$33

SPRAYER

3 Pt. Hitch



40 gal. Cat. I, 3 Pt. sprayer for sub-compact and compact tractors for the application of pesticides, herbicides, insecticides or fungicides. Four nozzle boom with 120" spray coverage, 3 section boom features break-away hinges for transport or striking objects such as trees or post when spraying.

- * 40 U.S. gallon polyethylene tank
- * 12 volt diaphragm demand style pump
2.1 gpm, 0-60 psi
- * Break away hinges on boom
- * 4 nozzle, 3 section Fold Behind Boom
- * 120" spray coverage
- * Deluxe pistol grip handgun with 15 feet of hose
- * Pressure gauge
- * 8 ft. lead wire with remote switch
- * Cat. I, 3 Pt. hitch

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
LG403PT12V	40 gal. US 3 Pt hitch sprayer 12V pump, 120" spray coverage	80 lbs.	\$789

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
7772014	Multi lid measuring device	\$33

Weights indicated are base machine weight, not shipping weight

SPRAYER

3 Pt. Hitch



LG603PT



Spray Gun Kit



Pump

60 Gal. (U.S.) Cat. I 3 Pt hitch sprayer for compact tractors for the application of pesticides, herbicides, insecticides or fungicides. 3 section, 7 nozzle boom, fold behind, coverage 140" features break-away hinges on boom.

- * 60 U.S. Gallon Polyethylene tank
- * 7 Nozzle, 3 section fold behind boom
- * Comes with TP8002VP Spray tips
- * Break-Away Hinge on Boom
- * 140" Spray Coverage
- * 6 Roller Ni-Resist Pump with PTO Coupler
- * Deluxe pistol Grip Hand gun with 25' of hose
- * Single Manual Lever Valve Boom Control
- * Relief Valve for Pressure Adjustment
- * Pressure Gauge

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
LG603PT	60 gal. US 3 Pt hitch sprayer with 6 roller Ni-Resist PTO pump	265 lbs.	\$2139

SPRAYER FOAM MARKERS

TrailLine



TJEV24



TJ15G



TJ1G

A foam marker can be a simple solution to mark your sprayed area through deposits of balls or ribbons of foam. It's the most common and economical way to avoid over or under application of crop protection chemicals. Kits include a 12 volt compressor, a solution tank, control box, and all the parts necessary for installation on any type of spraying equipment.

- * **Control box with electrical switch and safety fuse to direct foam to either side**
- * **6' power cable**
- * **15' compressor cable**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TJEV24	6.4 Gal. poly tank, 108' poly 6 x 4 air/liquid tube covered by a flexible sheathing. 6" vertical foam drop nozzles with adjustable supports and diffuser bells.	41 lbs.	\$989
TJ15G	15 Gal. poly tank, 118' poly 6 x 4 liquid and 6 x 8 air tube covered with a soft sheathing, horizontal foam nozzles complete with new compact style angular diffuser bells and adjustable supports.	50 lbs.	\$1275
TJ1G	ATV sprayer foam marker, includes 1 Gal. tank, 2 foam outputs, 2 x 6' of tubing, remote switch control	16 lbs.	\$585

ATV - UTILITY VEHICLE *Tufline* Attachments



ATV DISC

Designed to work behind larger ATV's (450cc & up) and utility vehicles. This heavy duty ATV disc is ideal for soil preparation and ground breaking.

- * Heavy duty 2" square tube frame
- * 16" notched disc blades
- * Adjustable gang angle
- * 1" square axle shafts with sealed ball bearings
- * 7-1/2" blade spacing
- * Ratchet turnbuckle height adjustment
- * Pneumatic tires on 8" rims
- * 1-7/8" ball hitch

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ATVD7816-2	52" working width ATV disc (8) 16" disc blades	347 lbs.	\$1669
ATVD71016	64" working width ATV disc (10) 16" disc blades	498 lbs.	\$2159

ATV OFFSET DISC



For 600 cc ATV's and larger and compact tractors. Available in 42", 48" & 56" working widths. Comes with 16" notched disc blades, with 9" blade spacing on dual disc gangs which creates a more aggressive & deeper cut. Tufline has developed a unique side draft and disc pressure adjustment system that keeps the unit tracking behind power unit.

- * Heavy duty 3" square tube frame
- * Adjustable angles for each gang
- * Rated for 600cc ATV & above
- * 9" blade spacing
- * 16" notched disc blades
- * 1 7/8" ball hitch

MODEL	DESCRIPTION	# BLADES	WEIGHT	LIST PRICE
UTD91016	42" Cutting Width	10	528 lbs.	\$2589
UTD91216	48" Cutting Width	12	564 lbs.	\$2699
UTD91416	56" Cutting Width	14	605 lbs.	\$2835

ATV - UTILITY VEHICLE *Tufline*

Attachments



Tufline's Flip Discs are an economical choice for use with ATV's 250 cc to 400 cc and small garden tractors.

- * Formed tube steel main frame
- * 52" cutting width
- * Eight 16" notched disc blades
- * 7-1/2" blade spacing
- * 1" square hi-strength gang axle
- * Weight tray for added weight when needed
- * Cast iron friction bearings with grease fittings offer long life
- * 1-7/8" ball hitch
- * Two 4.10 - 6 pneumatic transport tires

MODEL	DESCRIPTION	# BLADES	WEIGHT	LIST PRICE
ATVFD7816	52" Flip Disc	8	245 lbs.	\$1185

ATV LAND PLANE



The Monroe Tufline ATV Land Plane is designed to be pulled by larger ATV's, UTV's and small compact tractors. Available in 2 working widths, 4' and 5'. Dual angled moldboards for maximum smoothing of gravel driveways, landscaping etc. Ratchet height adjustment, replacable cutting edges, pneumatic tires and a 1-7/8" ball hitch.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ATVLP48	48" Working width	365 lbs.	\$1915
ATVLP60	60" Working width	415 lbs.	\$1979

ATV - UTILITY VEHICLE *Tufline*

Attachments

ATV GRADER / SCRAPER BLADES

- * Angle adjustment, left or right
- * Moldboard height 15"
- * Pneumatic tires on 8" rims
- * 1-7/8" ball hitch



MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ATVG48	4' (48")	215 lbs.	\$1199
ATVG60	5' (60")	230 lbs.	\$1245

ATV BOX SCRAPER

- * Manual lift lever for height adjustment
- * 1/8" thick plate box frame
- * Pneumatic tires on 8" rims
- * 1-7/8" ball hitch



MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ATVB48	4' (48") Box blade	205 lbs.	\$1199

ATV LANDSCAPE RAKE


- * Manual lift lever for height adjustment
- * 15" spring steel rake tines, mounted on 1" centers
- * Pneumatic tires on 8" rims
- * 1-7/8" ball hitch



MODEL	DESCRIPTION	WEIGHT	LIST PRICE
ATVLR48	4' (48") Landscape rake	192 lbs.	\$1199
ATVLR60	5' (60") Landscape rake	203 lbs.	\$1299
ATVLR72	6' (72") Landscape rake	235 lbs.	\$1385

CHAIN HARROWS

Hackett Harrows

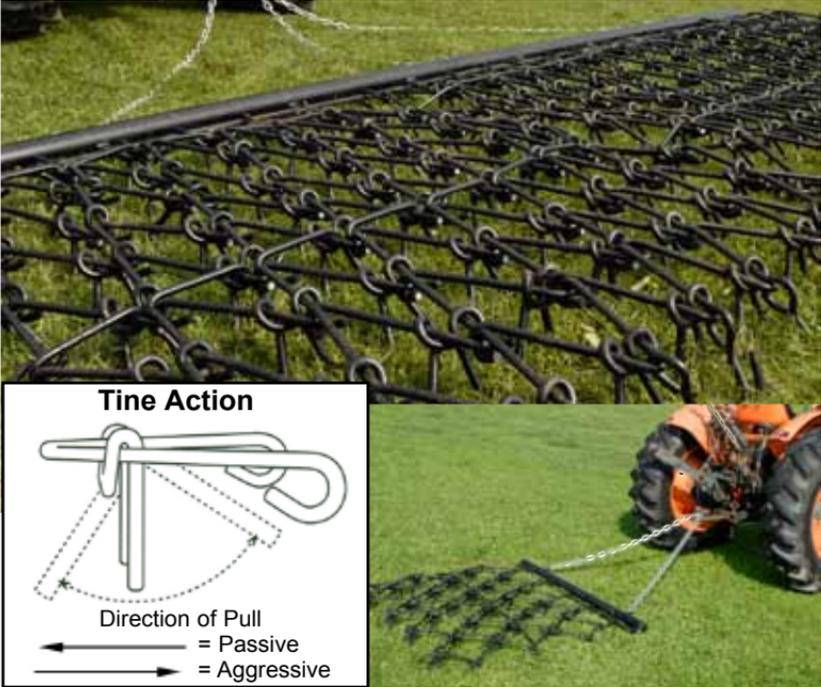

HACKETT HARROWS are designed to cover all applications from large farms to smaller hobby farms and equestrian venues. The Hackett Harrow is ideal for all types of ground work, by improving ground conditions by removing thatch, breaking up clods, working in fertilizer and breaking up and leveling soil, in established pastures, paddocks, park lands, small acreages, race tracks and horse arenas. The Hackett Harrows is manufactured in the U.K. from high quality steel, which ensures that the harrow is extremely strong with high resistance to wear. Harrows are available in 4 ft. 8 ft. 12 ft. and 16 ft. widths, x 4 ft. or 8 ft. long.

- * Tine size 1/2" x 3-1/2"
- * Sixty tines per 4 foot section
- * High quality, high carbon steel tines
- * Heat treated at optimum temperatures to ensure high resistance to wear


PULL TYPE HARROW SETS COMPLETE WITH DRAWBAR

WIDTH X LENGTH	CONTENTS	WEIGHT	LIST PRICE
4' x 4'	1-CC044 & 1-DB04U	105 lbs.	\$298
8' x 4'	2-CC044 & 1-DB08U	203 lbs.	\$535
12' x 4'	3-CC044 & 1-DB12U	301 lbs.	\$825
16' x 4'	4-CC044 & 1-DB16U	402 lbs.	\$1140
4' x 8'	2-CC044 & 1-DB04U	179 lbs.	\$489
8' x 8'	4-CC044 & 1-DB08U	351 lbs.	\$910
12' x 8'	6-CC044 & 1-DB12U	523 lbs.	\$1390
16' X 8'	8-CC044 & 1-DB16U	698 lbs.	\$1890

Weights indicated are base machine weight, not shipping weight

H&S

Innovation + Technology + The Market Leader = H&S Forage Boxes!

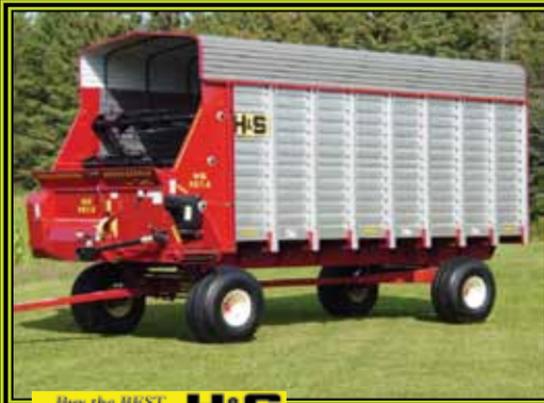

XTRACAP
Forage Boxes
Feature:

- *More Cross Members
- *New Color Scheme
- *More Capacity
- *More Uprights
- *More Height

Buy the BEST BUY **H&S**



"SUPER DUTY" Forage Boxes are available
w/ Electric-Over-Hydraulic Cab Controls!



H&S
Wide
Body
"The Only
Box with
Patented
Center
Drive"

ROCK RAKES



PWD10



WD6

Houle Fabrication offers 4 models of rock rakes, two 3 Pt. hitch and three pull types, 540 PTO RPM, for windrowing rocks for easier pickup. The most efficient rock rake on the market because of the many features that make them easy to use and to move. Made in CANADA.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
WD6	5' 2" working width, Cat II, 3 Pt. hitch 540 RPM PTO, slip clutch PTO with 2-16.5" x 6.5" pneumatic tires. Replaceable and reversible teeth. Sealed transfer case. Recommended HP 40-60 HP	1150 lbs	\$9059
WD10B	10' working width, 3 Pt. Cat. II, two 18.5 x 8.5 tires which swivel 360°, maintains balance, replaceable & reversible teeth, sealed Transfer case for longer lasting #100 drive chain, Slip clutch PTO. Recommended HP 65-125 HP, recommended speed 4-6 kmh.	1850 lbs.	\$11,699
PWD10	10' working width, pull type with 11L x 15 transport tires, replaceable and reversible teeth, adjustable flotation system provides protection against breakage & obstacles. Includes lift hydraulic cylinder & hoses. #100 Drive chain. Slip clutch PTO. Recommended HP 50-125 HP. Recommended speed 4-6 kmh.	2400 lbs.	\$14,205
SRR15	15' working width, pull type with 11L x 15 transport tires, comes with Manual transport kit. Replaceable and reversible teeth, adjustable flotation system provides protection against breakage & obstacles. Includes lift hydraulic cylinder & hoses. Slip clutch PTO, #100 drive chain. Recommended HP 65 + HP, recommended speed 4-6 kmh.	3600 lbs.	\$20,875
SWD15	15' working width, pull type with 11L x 15 transport tires, comes with Hydraulic transport kit. Replaceable and reversible teeth, adjustable flotation system provides protection against breakage & obstacles. Includes lift & transport hydraulic cylinders & hoses. Slip clutch PTO, #100 drive chain. Recommended HP 65 + HP, recommended speed 4-6 kmh.	4700 lbs	\$22,499

15 ft. hydraulic driven models now available in SRR15 and SWD15 models.

F.O.B. St. Germain PQ

Weights indicated are base machine weight, not shipping weight

TREE SHEARS



S. Houle Fabrication offers two tree shears, a 8" and a 16" cutting capabilities. Available in tractor loader mount or skid steer mount.

8" TREE SHEAR	
TS08 LOADER MOUNT \$6965	TS08SS SKID STEER MOUNT \$6999
<ul style="list-style-type: none"> * Cuts up to 8" capacity * Designed to trim and cut trees and limbs in tight spaces and near fence lines. * The cylinder's thrust provides each blade with 60,000 PSI * For tractors, skid steers and tele-handlers minimum 60 HP with hydraulic flow 75-95 LM/14-19GPM @ 2700-3000 PSI. * 6" x 5" hydraulic cylinder for scissor action blades * 3" x 11' hydraulic cylinder for rotation cylinder * Cutter head rotates 110 degrees * Blades are made of RT-400 Steel * A single electro-hydraulic valve allows you to switch from one hydraulic cylinder to the other * Tractor loader mount requires optional loader mounting brackets., extra. * Skid steer mount comes with universal skid steer mounting bracket * Weight 987 lbs. (448kg) 	
16" TREE SHEAR	
TS16 TRACTOR LOADER MOUNT \$9679	TS16SS SKID STEER MOUNT \$9799
<ul style="list-style-type: none"> * Cuts up to 16" Capacity * Cutting power up to 85,000 PSI * Requires a minimum of 75 HP tractor, skid steer or tele-handler with minimum hydraulic flow 75-95 LM (20-25 GPM) @ 2700 – 3000 PSI * RT-400 Steel frame and a blade with an RT-400 steel cutting edge that is also reinforced to eliminate distortion * Single blade eliminates center cut splinters * Blade moves from left to right for better operator visibility * Concave jaw design * 3" x 8" hydraulic tilt cylinder rotates cutter head 110 degrees * Massive 3" blade pivot pin provides unmatched rotational strength. * All pivot points are greaseable. * A single electro-hydraulic valve allows you to switch from one cylinder to the other * Tractor loader mount requires optional loader mounting brackets., extra. * Skid steer mount comes with universal skid steer mounting bracket * Weight 1550 lbs. (705kg) 	

OPTIONS:

DESCRIPTION

CA011604E02
31031

Brush Guard for TS16
High Flow Solenoid 3500 + PSI

LIST PRICE

\$645
\$450

F.O.B. St. Germain, PQ

TREE SHEARS



TS08



TS16
Shown with optional
brush guard

F.O.B. St. German, PQ

Weights indicated are base machine weight, not shipping weight

TREE SAW HYDRAULIC, SKID STEER



The BROWN Tree Saw is designed for skid steer is a rugged machine that can handle selective clearing of wood lots, fence rows, food plots and ATV / bike trails. The heavy construction is tough enough to cut heavy brush and trees up to eight inches in diameter. All models have an electric over hydraulic rotating head for trimming limbs and sizing logs for easy removal. Mining grade saw blade tips are used to allow below ground cutting when desired. Machines are available with either industry standard hydraulic gear motors or cutting edge “Bent Axis Piston” motors.

- * **90 Degree Rotating Head**
- * **30” Blade with 10 Replaceable Carbide Teeth**
- * **All Welded Construction**
- * **Limb & Brush Guard Included**
- * **5 U.S. Gallon Herbicide Tank with Adjustable Spray Nozzle**
- * **Includes Hydraulic Hoses and Couplers**
- * **Includes 3 Button Wiring Harness**
- * **Optional 8 Pin or 14 Pin Connectors Available**

MODEL	DESCRIPTION	GPM REQ'D	WEIGHT	LIST PRICE
HTS3020	with hydraulic gear motor	15-25GPM	1020 lbs.	\$18,299
HTS3040	with hydraulic gear motor	26-42GPM	1020 lbs.	\$18,299
HTS3020BA	with hydraulic bent axis motor	15-25GPM	1020 lbs.	\$21,399
HTS3040BA	with hydraulic bent axis motor	26-42GPM	1020 lbs.	\$21,399

Special Order, Allow 30 days for delivery

TREE SAW



TS100 Model Shown



TSG200 Model Shown

The BROWN TREESAWS are designed to be rugged machines that can handle selective clearing of wood lots, fence rows, food plots, ATV/bike trails etc. the heavy construction is tough enough to cut heavy brush and trees up to 8" in diameter. The balanced blade keeps vibration to a minimum. The TS100 comes with a rigid brush bar for controlling brush and trees as you cut them. The TSG200 comes with a hydraulic grapple for moving brush and cut trees after cutting. Both units include a brush guard to protect operator.

- * **Minimum HP required 35 HP**
- * **Cat. 1 3 Pt. Hitch**
- * **Height of cut: ground level**
- * **All welded construction**
- * **Gear Box Ratio 1: 1.5**
- * **540 RPM PTO**
- * **30" Blade with replaceable carbide teeth**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TS100	TREESAWS with brush guard	850 lbs.	\$7869
TSG200	TREESAWS with hydraulic grapple & brush guard (includes hydraulic hose)	1050 lbs.	\$9499

LOGGING WINCHES

Fransgård



The **FRANSGÅRD** winch was designed for log skidding in wood lot applications. They are available in 5 models according to pulling capacity. They range from 6600 lbs to 14,300 lbs pulling capability. The overall dimensions of the winch are specifically designed to enable easier access in narrow passages. The winch can also be used for log "dozing" and land leveling making the Fransgård winch a versatile piece of equipment.

- * Winches are available in 5 models for 3 Pt. hitch tractors.
- * Standard with slip clutch protection
- * Standard cable with one hook included
- * Cable is pre-installed on wire drum
- * HP Requirements: 25-80
- * Protective screen guard included
- * Extra supports on the top pulley provide additional resistance when pulling heavier logs
- * A cable drum tension bracket prevents unspooling of the cable when pulling the cable out

MODEL	PULL CAP.	WEIGHT	TRACTOR HP REQ'D	CABLE LENGTH	CABLE DIA.	LIST PRICE
V3004	6600 lbs	385 lbs.	25	133'	5/16"	\$4499
V3507	7700 lbs	408 lbs.	25	133'	5/16"	\$4599
V4000	8800 lbs	550 lbs.	40	167'	3/8"	\$5499
V5000	11,000 lbs	667 lbs.	40	167'	3/8"	\$5799
V6500	14,300 lbs	880 lbs.	80	167'	7/16"	\$8945

CAUTION: Timber winches are mounted very close to the tractor for maximum stability, therefore PTO length is critical. Stock length shaft supplied may require shortening to suit tractor. Operator should ensure that the PTO is never operated at over a 30 degree angle. Three point hitch linkage must have lower setting adjusted so winch does not dig into soft ground pulling the or breaking the PTO shaft. There is no warranty on PTO shafts and knuckles broken or bent under the circumstances listed above. Never transport logs hooked to top of winch by cable, always use chains hooked to transport bar which gives a lower center of gravity.

NOTE : Please review owners manual as there are specific operating and maintenance instructions - cables are considered a wearing part and are not covered by warranty.

Not available in Quebec

LOGGING WINCH Accessories

Fransgård



1582



1562



1525/1546/1556



1586/1588



1584



1595/1596



1593

MODEL	DESCRIPTION	LIST PRICE
1562	End hook for cable	\$17
1582	Choker/Slider	\$32
1584	Choker chain 7' silver (for use w/V3004 & V3507. Work load 2200lbs/1000kg)	\$54
1586	Choker chain heavy duty 7' red (for use with V4000 & V6500 Work load 6615 lbs/3000kg)	\$93
1588	Choker chain heavy duty 10' red (for use with V4000 & V6500 Work load 6615 lbs/3000kg)	\$118
1593	Middle Pulley for V3004 and V3507	\$139
1595	Distance Pulley - 4000 kg / 8800 lbs.	\$449
1596	Distance Pulley - 13000 kg / 28600 lbs.	\$1125

LOG SPLITTER SPLIT SECOND

Engine Driven Towable

Agri-Fab®
Lawn Care Made Easy™



The SPLIT SECOND log splitter from AGRI-FAB is FAST, how fast? Four times faster than a hydraulic log splitter* it can split an entire cord of wood in one hour. SPLIT SECOND log splitter is the only log splitter on the market that adjusts to your height, ends the problem of back-breaking painful bending and lifting. The splitting power is generated by twin 90 lb. flywheels, making it one of the most powerful kinetic log splitters on the market. Up to 16" of ground clearance and convenient castor wheel jack makes this splitter easy to handle. Optional log lifter, log dolly, all season weather cover and outrigger/stabilizer kit

- * 6.5 HP SP170 SUBARU Engine
- * 40"L x 33"W log table
- * Beam height, adjustable 26.5" – 34"
- * Flywheel weight 90 lbs. x 2
- * Similar hydraulic ton rate 34 tons
- * Retractable hitch
- * 2" ball hitch
- * 4.80/4.00-8 Highway Tires
- * Unique wedge and ram design prevents the wood from popping out of place
- * 3 Year Consumer Warranty, or 6 Months Commercial Use

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
450503	SPLIT SECOND Log Splitter	570 lbs.	\$5579

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
450507	Log Lifter (Manual) incl'ds 450513 Outrigger/Stabilizer Kit	\$575
450506	Log Dolly	\$270
450509	All-Season Weather Cover	\$209
450513	Outrigger/Stabilizer Kit	\$125
450231	Log Cart with Lid	\$499

LOG SPLITTER SPLIT SECOND

Engine Driven Towable

Agri-Fab
Lawn Care Made Easy



450507



450506



450231

LOG SPLITTER

Engine Driven
Towable



TL23357



TL2HV25



TL23353

LOG SPLITTER

Engine Driven

Towable



The new TERRALINE of engine driven, towable log splitters include three models, 22 ton, 25 ton, vertical and horizontal split, and a 25 ton dual action horizontal splitter. All units come with Hi-speed (45 MPH) tires, 2" ball coupler.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TL23357	22 Ton, 208cc LCT Engine VERTICAL OR HORIZONTAL SPLITTER 11 GPM 2 Stage Gear Pump, 4" X 23" Hydraulic Cylinder Oil Capacity 2.64 Gallon. Maximum Splitting Length 24". Maximum Splitting Diameter 14" 7" Hardened Steel Wedge, Auto Return Hydraulic Valve 16" x 6.5" Pneumatic Tires, (NO Fenders)	343 lbs	\$1695
TL2HV25	25 Ton, 208cc LCT Engine VERTICAL OR HORIZONTAL SPLITTER 11 GPM 2 Stage Gear Pump, 4.5" X 24" Hydraulic Cylinder Oil Capacity 6.5 Gallon. Max Splitting Length 26" 8" Hardened Steel Wedge, Auto Return Hydraulic Valve 16" x 6.5" Pneumatic Tires	485 lbs	\$1899
TL23353	25 Ton, 208cc LCT Engine DUAL ACTION HORIZONTAL SPLITTER 11 GPM 2 Stage Gear Pump, 4.5" X 24" Hydraulic Cylinder Oil Capacity 2.64 Gallon. Max Splitting Length 24". Max. Dia. 16" Splitting Force forward: 25 ton max Splitting Force return: 18.5 ton Splitting Speed forward: 9 sec Splitting Speed return: 7 sec 7.5" Hardened Steel Wedge, Auto Return Hydraulic Valve 16" x 6.5" Pneumatic Tires	430 lbs	\$2226

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
TL4XW-ES22	4-way cross wedge for TL23357	\$95
TL4XW-DS25	4-way cross wedge for TL2HV25	\$95

LOG SPLITTER

3 Pt. Hitch



The new TERRALINE of log splitters include this 3 point hitch model. Attaches to Cat. I 3 Pt. Hitch tractors, horizontal Split, 14 ton capacity (depending on hydraulic output of tractor). Optional stand and 4 way cross wedge is available. Does not include hydraulic hoses (2) or hydraulic coupler plugs to tractor.

- * Cat. I 3 Pt. Hitch
- * 14 ton capacity
- * Recommended 11 GPM from tractor
- * Splits in horizontal position
- * Maximum log length 24"
- * Cylinder size 4" x 24"
- * Pressure relief setting 2500 PSI
- * 7.87" Hardened steel wedge

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TL23303	3 Pt. Hitch Cat. I 14 ton capacity	251 lbs.	\$959

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
TL4XW-TP14	4-way cross wedge	\$95

STUMP GRINDERS

3 Pt. Hitch



SureFoot Stabilizer Bar

This **WORKSAVER** economical and efficient PTO powered stump grinder makes stump removal fast & easy. The operator easily controls the stump grinder from the comfort of their tractor seat.

- * **Maneuverable - goes anywhere a tractor can.**
- * **Cutting wheel design provides a smoother cutting action.**
- * **Durable carbide -tipped cutting teeth are economical and easy to replace.**
- * **SUREFOOT stabilizer bar provides solid footing during operation.**
- * **Rubber deflector helps control chips during grinding.**
- * **Hardened bushings used in major pivot points for increased reliability.**

MODEL	SG26 (3 Pt)	SG36 (3 Pt)
LIST PRICE	\$8519	\$9819
Hitch	Cat. 1	Cat. 1 and 2
Overall Length	75"	80"
PTO Driveline	Series 5	Series 6
Driveline Protection	Slip Clutch	Slip Clutch
Gearbox Rating	60 HP	100 HP
Cutting Wheel Thickness	3/4"	3/4"
Cutting Wheel Diameter	26"	36"
# Of teeth	30	39
Cutting Ht Above Ground	18"	18"
Cutting Ht Below Ground	10"	10"
Max. Cut Depth Per Pass	5"	8"
Max. horizontal cut	28"	33"
Swing Arc	45°	45°
HP Requirement	22-50	45-100
Weight	660 lbs.	880 lbs.

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
811600	Box of 25 replacement carbide teeth with bolts and washers	\$325

Weights indicated are base machine weight, not shipping weight

GRAPPLE

SARG: Sweep Action Rock Grapple



SAMB: Sweep Action Material Bucket



Handling of rocks and other debris has just been made easier by WORKSAVER. The Sweep Action Rock Grapple (SARG) and the Sweep Action Material bucket (SAMB) is revolutionizing the way grapples work. With it's patent pending design the SARG – SAMB allows the operator to own one tool to collect and sort rocks or collect demolition debris, brush and other material. The front grapple operates in a sweeping action to pull rocks, debris or other material into the unit.

SARG

- * Available in two sizes 72" & 84"
- * Bucket Depth 34"
- * Grapple opening 45"
- * 66 Degrees of sweeping action
- * Tine diameter 1-1/2"

SAMB

- * Available in two sizes 72" & 84"
- * Bucket Depth 32"
- * Grapple opening 45"
- * 66 Degrees of sweeping action
- * Bolt-on cutting edge 3/4" x 8" alloy steel

Includes hydraulic hoses and flat face connect under pressure couplers
All units include universal Skid Steer quick attach brackets

MODEL	DESCRIPTION	WEIGHT	PRICE
SARG72	72" wide Rock Grapple	1194 lbs.	\$8399
SARG84	84" wide Rock Grapple	1375 lbs.	\$8999
SAMB72	72" wide Material Grapple	1075 lbs.	\$8445
SAMB84	84" wide Material Grapple	1210 lbs.	\$8999

GRAPPLE RAKES

Compact Tractors up to 40 HP



WORKSAVER grapple rakes for skid steer and tractor front loaders are ideal for loading logs, picking rocks, and orchard prunings. Can be used for raking and piling brush and other hard to handle materials. Skid steer models use "Universal attaching" system for quick convenient method of hook-up. Tractor front loader mounting brackets extra. Pin type or quick attach brackets available.

- * Single grapple
- * Single cylinder controls upper grapple
- * Optional interfacing quick-attach bracket available to fit most John Deere, AGCO, Kubota, CNH, and other brands of loaders.
- * The FLGR-4062S is used on OEM loaders that utilize the skid steer quick-attach system

MODEL	APPLICATION	WIDTH	WEIGHT	LIST PRICE
FLGR4062	Front Loader	60"	277 lbs.	\$2699
FLGR4062S	Front Loader with skid steer quick-attach system	60"	355 lbs.	\$2885
NOT FOR USE ON SKID STEER LOADERS				

GRAPPLE RAKES

Tractors / Skid Steer



WORKSAVER grapple rakes for skid steer and tractor front loaders are ideal for loading logs, picking rocks, and orchard prunings. Can be used for raking and piling brush and other hard to handle materials. The split top design provided dual upper grapples for picking up brush and other debris while leaving the dirt behind. Skid steer models use “Universal attaching” system for quick convenient method of hook-up. Tractor front loader mounting brackets extra. Pin type or quick attach brackets available.


- * **Two working widths 62” and 77” with 4 grapple tines**
- * **Tine spacing 15” center to center**
- * **Grapple opening 50”**
- * **Grapple depth 25”**
- * **Reinforced tubes welded between lower tines for added strength**
- * **Includes hydraulic cylinders, less hoses**

MODEL	APPLICATION	WIDTH	WEIGHT	LIST PRICE
FLGR262	Front Loader	62”	811 lbs.	\$4699
FLGR277	Front Loader	77”	958 lbs.	\$5385
SSGR262	Skid Steer	62”	820 lbs.	\$5045
SSGR277	Skid Steer	77”	965 lbs.	\$5699

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
811395	Parking Stand Kit, 26 lbs Allows upright storage and easy hook up on hard surfaces	\$265

GRAPPLES FOR ROCK BUCKETS

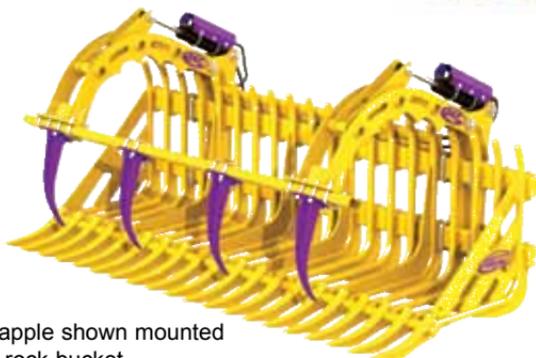

Grapple shown mounted
on rock bucket

Houle provides two models of Grapple attachments for their **rock buckets** depending on the model. Units bolt on to buckets, and include two 2-1/2" x 18" hydraulic cylinders, (less hydraulic hoses to tractor), & four replaceable hardened steel teeth. Units are easily detached from bucket when not required.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
GP10	Fits 6' to 9' B & HB Rock Buckets	625 lbs.	\$2495
SGP10	Fits 7' to 9' SHB Rock Buckets	700 lbs.	\$3735



IN200003



IN2000002
Alo Loaders

U-BOLT ON QUICK ATTACH BRACKETS

S. Houle Fabrication U-Bolt-On quick attach brackets are manufactured extra heavy duty to withstand the punishment of digging and picking stones and rocks. Designed and built to allow bucket more roll back.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
IN20E12	U-Bolt-On pin type loader brackets (pair)	70 lbs.	\$339
IN200003	U-Bolt-On universal skid steer quick attach bracket	105 lbs.	\$499
IN2000002	U-Bolt-On quick attach brackets for ALO loaders	105 lbs.	\$499
IN0100013	U-Bolt-On quick attach brackets for JD600 & 700 series	160 lbs.	\$569

Also available many more brackets to fit Allied (Farm King), Alo, Case IH, JD, FNH, Cat, Kubota, MF. etc. Check with your local dealer for the availability of brackets for your loader.

ROCK BUCKET



S. Houle rock buckets are unique on the market, with unmatched tip design and high quality steel tines, we ensure you have the most robust tool to accomplish the work you need to do. Our tips are specifically designed to support maximum weight up to 3 times what or competition can offer. Their specially designed profile offers a stopper that allows more volume capacity by keeping rocks and stones from tumbling out. We have such confidence in our product we offer a limited lifetime warranty on tips. We offer 4 different tine sizes of rock buckets in various working widths. All rock buckets are priced less loader mounting brackets.

- * Each tooth made from spring steel.
- * Priced less mounting brackets

BB Series

STANDARD ROCK BUCKET 1.125" TOOTH DIA. X 2.5" SPACING TENSILE STRENGTH - 83,077 Lbs.						
MODEL	WORKING WIDTH	DEPTH	HEIGHT	# OF TEETH	WEIGHT (LBS.)	LIST PRICE
BB4W	4' / 48"	37"	24"	14	397	\$1989
BB5W	5' / 60"	37"	24"	17	477	\$2175
BB6W	6' / 72"	37"	24"	21	583	\$2439
BB7W	7' / 84"	37"	24"	24	663	\$2565

B Series

STANDARD ROCK BUCKET 1.25" TOOTH DIA. X 2.5" SPACING TENSILE STRENGTH - 112,500 Lbs.						
MODEL	WORKING WIDTH	DEPTH	HEIGHT	# OF TEETH	WEIGHT (LBS.)	LIST PRICE
B6	6' / 72"	42"	24"	19	760	\$2915
B7	7' / 84"	42"	24"	22	875	\$3175
B8	8' / 96"	42"	24"	25	990	\$3519

Call your local dealer for the availability and pricing on heavy duty S. Houle loader quick attach brackets for your loader.

ROCK BUCKET



S. Houle rock buckets are unique on the market, with unmatched tip design and high quality steel tines, we ensure you have the most robust tool to accomplish the work you need to do. Our tips are specifically designed to support maximum weight up to 3 times what or competition can offer. Their specially designed profile offers a stopper that allows more volume capacity by keeping rocks and stones from tumbling out. We have such confidence in our product we offer a limited lifetime warranty on tips. HB Series is intended for use with tractors ranging from 85 to 200 HP. SHB Series is built for industrial loaders and large backhoe loaders. All rock buckets are priced less loader mounting brackets.

HB Series

HEAVY DUTY ROCK BUCKET 1.5" TOOTH DIA. X 3" SPACING TENSILE STRENGTH - 135,000 Lbs.						
MODEL	WORKING		HEIGHT	# OF TEETH	WEIGHT (LBS.)	LIST PRICE
	WIDTH	DEPTH				
HB5	5' / 60"	42"	24"	14	705	\$2969
HB6	6' / 72"	42"	24"	16	820	\$3255
HB7	7' / 84"	42"	24"	17	990	\$3515
HB8	8' / 96"	42"	24"	22	1110	\$3770
HB9	9' / 108"	42"	24"	25	1375	\$4029

SHB Series

SUPER HEAVY DUTY ROCK BUCKET 1.75" TOOTH DIA. X 4" SPACING TENSILE STRENGTH - 157,500 Lbs.						
MODEL	WORKING		HEIGHT	# OF TEETH	WEIGHT (LBS.)	LIST PRICE
	WIDTH	DEPTH				
SHB8	8' / 96"	42"	24"	18	2075	\$7645
SHB9	9' / 108"	42"	24"	20	2205	\$7995

SHB Series require special loader mounting brackets. **Price on Request**

Call your local dealer for availability and pricing on heavy duty U-Bolt type quick attach brackets for your loader

GRAPPLE BUCKET LOW PROFILE SKID STEER



Model LPSB



Model LPTG

WorkSaver's NEW Low Profile Grapple Buckets come in two different styles, Tine Bottom and Solid Bottom. Available in four models, all with a split grapple assembly with 2 hydraulic cylinders with cylinder guards to protect cylinders and hoses. These NEW Grapple Buckets are manufactured to attach to any skid steer with the "universal" skid steer quick attach mounting system. Comes with hydraulic hoses and "connect under pressure" flat faced couplers.

- * 72" & 84" overall width
- * Split grapple assembly
- * Tine grapple has 7 1/2" spacing
- * Scrap bucket cutting edge is pre-drilled to accept optional replaceable bevelled cutting edge
- * Complete with "connect under pressure" flat faced couplers
- * Two 2"x10" Hyd cylinders with cylinder guard protection
- * Universal skid steer quick attach mounting bracket

MODEL	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
LPTG72	72" Low profile tine grapple bucket	820 lbs.	\$4699
LPTG84	84" Low profile tine grapple bucket	898 lbs.	\$5585
LPSB72	72" Low profile scrap grapple bucket	760 lbs.	\$4795
LPSB84	84" Low profile scrap grapple bucket	855 lbs.	\$5899

OPTIONS: FOR LPSB72 OR LPSB84 SCRAP BUCKET

MODEL	DESCRIPTION	LIST PRICE
811790	3/4" x 8" x 72" reversible cutting edge & hardware	\$599
811870	3/4" x 8" x 84" reversible cutting edge & hardware	\$689

MANURE FORKS



M/SG-72S



M/S-60S

The Worksaver Manure Fork was designed for picking up manure, matted straw or other loose materials. Excellent for handling silage, units with upper grapple helps secure load during transport improving productivity. All units have forged cranked tines for extended service life. Units with upper grapple and skid steer mount are supplied with hydraulic hoses and connect under pressure couplers for ease of installation. Models with upper grapple have greasable pivot points for long life and cylinder pivot points utilize replaceable harden bushing to reduce wear.

- * Available in 60" & 72" widths
- * Available with or without upper grapple
- * Overall depth 31" / 787mm
- * Overall height 21.5" / 546mm
- * Useable tine length 27" / 686mm
- * Upper grapple width 34" / 864mm
- * Tine spacing 7.5" / 190mm
- * Number of tines 60" - 8, 72" - 10

Units come with Universal Skid Steer quick attach plate. Includes hydraulic hoses and flat face couplers.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
MS60S	Manure fork 60" wide	225 lbs.	\$1459
MSG60S	Manure fork 60" wide with upper grapple	405 lbs.	\$3430
MS72S	Manure fork 72" wide	270 lbs.	\$1579
MSG72S	Manure fork 72" wide with upper grapple	450 lbs.	\$3739

Units require Optional Bolt-on Quick Attach Brackets. To be ordered separately. Units with upper grapple come LESS hydraulic hoses & couplers.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
MS60U	Manure fork 60" wide	225 lbs.	\$1459
MSG60U	Manure fork 60" wide with upper grapple	375 lbs.	\$2975
MS72U	Manure fork 72" wide	270 lbs.	\$1579
MSG72U	Manure fork 72" wide with upper grapple	450 lbs.	\$3299

Weights indicated are base machine weight, not shipping weight

PALLET FORKS



- * **Clamp-On to material loader Bucket**
- * **Available in three sizes**
- * **No tools required to install**

MODEL	DESCRIPTION	WEIGHT	PRICE
BF1000	1000 lb capacity, 35" usable length, pair.	78 lbs.	\$575
BF2000	2000 lb capacity, 42" usable length, pair.	102 lbs.	\$649
BF4000	4000 lb capacity, 42" usable length, pair.	168 lbs.	\$1049



SSPF448



PF448

- * **1-1/4" x 4" solid forks with spring loaded toggle latch for positioning**
- * **Skid steer mount units have step through design**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SSPF442	Pallet forks 4000 lb. rated, 42" long to fit skid steer or tractor loaders with universal skid steer attach system	345 lbs.	\$1469
SSPF448	Pallet forks 4000 lb. rated, 48" long to fit skid steer or tractor loaders with universal skid steer attach system	359 lbs.	\$1469
PF448	Pallet forks 4000 lb. rated, 48" long to fit tractor loaders. Designed to mount to tractor loaders with centre to centre between arms up to 50" Optional interfacing quick attach brackets extra	438 lbs.	\$1489

Pallet forks available for John Deere 400/500 series loaders and loaders with GLOBAL / EURO attaching system

COMPACT PALLET FORKS

For 40 HP Tractors / Loaders



SSPF242

These newly designed compact pallet forks from Worksaver incorporates many of the same durability features found in our larger units. These models utilize Class I forks (1" x 4" x 42") rated at 2,000 lbs. for the pair providing optimal lifting capacity. Spacing adjustment is easy with spring loaded latches allowing the operator to move the forks along the notched rail.

- * **Class I solid steel alloy forks**
- * **Forks are 1" x 4" x 42" rated @ 2000 lbs. / pair**
- * **Rail style forks with spring loaded latches**
- * **3 models available for tractors with loaders up to 40 HP**

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SSPF242	Pallet forks 2000 lb. rated to fit loaders with universal skid steer attaching systems	290 lbs.	\$1149
FLPF2000	Pallet forks 2000 lb. rated to fit any compact tractor loader under 40HP accepting quick attach system Brackets extra (sold separately)	270 lbs.	\$1225
JDPF2000	Pallet forks 2000 lb. rated to fit John Deere 200 / 300 Series with JD quick attach system	280 lbs.	\$1289

COMBI-RAKE RV

3 Pt. Hitch

Fransgård




The Fransgard Basket type rake is designed to deliver fast and even drying of your crop of hay. The pickup tines are lowered into working position by centrifugal force and follow the terrain contour in a uniform fashion. This rake can both windrow or act as a tedder.

- * Working width: Raking 9 ft
Tedding 9 ft. 6 in
- * Transport Width: 2.5m / 8 ft
- * Working Speed: 10 to 15 km
- * HP Requirement: 30 HP
- * Number of tines 20
- * Tires: Two 15 x 6.00
- * CAT I, 3 Pt. hitch
- * 540 RPM PTO with slip clutch


MODEL	DESCRIPTION	WORKING	WEIGHT	LIST PRICE
		WIDTH		
RV300	Rake / Tedder 3 Pt.	Raking 2.75m / 9 ft Tedding 2.90m / 9 ft. 6 in.	787 lbs.	\$4999

FINGER WHEEL RAKES

3 Pt. Single Side

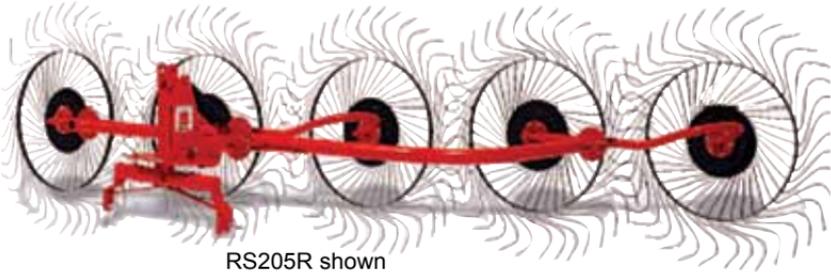

RS205R shown

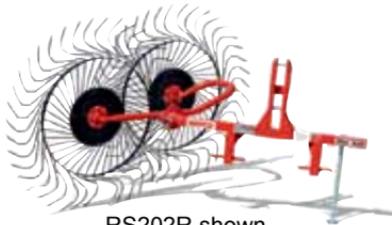


RS202R shown

For tractors from 30 HP engine and up. Category 1 or 2, 3 Pt. hitch. Finger rake wheels are mounted on molded steel hubs with tapered bearings. Lifts hay gently, and evenly from undulating terrain. May also be used for raking, turning or spreading swathes. Its fast working speed makes it possible to cover a large acreage quickly. Having no gears, chains or other drive components to wear out, the finger wheel rake is truly a low maintenance tool.

- * **HP Requirements: 30-80**
- * **Cat. 1 3 Pt. hitch**
- * **Molded steel hubs with greasable tapered bearings**
- * **May also be used for raking, turning or spreading swathes**
- * **Lifts hay gently, even from undulating terrain**

MODEL	# WHEELS	MAXIMUM		
		WORKING WIDTH	WEIGHT	LIST PRICE
RS202R	2	4' 3"	194 lbs.	\$949
RS203R	3	6' 5"	291 lbs.	\$1399
RS204R	4	8' 6"	388 lbs.	\$1879
RS205R	5	11'	495 lbs.	\$2289
RS206R	6	12' 9"	602 lbs.	\$2739

HAY HANDLING ATTACHMENTS FOR JOHN DEERE LOADERS & AL0 GLOBAL STYLE QUICK ATTACH LOADERS



JDBS423 &
JDBS623




JDBS412 & JDBS612



GLB3000



GLB2200

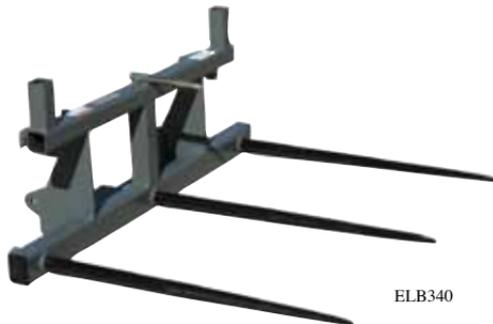

ELB340

HAY HANDLING ATTACHMENTS FOR JOHN DEERE LOADERS & ALO GLOBAL STYLE QUICK ATTACH LOADERS



For John Deere loaders

300,300CX,400X,410,420,430,440,460,520,521,540,541,542,553

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
JDBS412	2200 lb. Single Loader Bale Spear 42" tapered forged spear with two 1" x 8-1/2" balance spikes	121 lbs.	\$799
JDBS423	3000 lb. Dual Bale Spear Two 42" forged tapered spears.	156 lbs.	\$999

For John Deere loaders

620,640,720,721,725,726,740,741

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
JDBS612	2200 lb. Single Bale Spear 42" tapered forged spear with two 1" x 8-1/2" balance spikes	176 lbs.	\$1089
JDBS623	3000 lb. Dual Bale Spear Two 42" forged tapered spears, spaced 30" apart	196 lbs.	\$1255

For Global/Euro Alo Quick Attach Loaders

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
GLB2200	2200 lb. Single Bale Spear 42" tapered forged spear with two 1" x 8-1/2" balance spikes	114 lbs.	\$735
GLB3000	3000 lb. Dual Bale Spear Two 42" forged tapered spears, spaced 30" apart	128 lbs.	\$885
ELB340	4000 lb. rated Triple Spear spaced 26" apart with usable length of 42" for large size square bales	200 lbs.	\$1269

OPTION

831095	Bolt-on Upright kit for handling two square bales.	32 lbs	\$165
--------	---	--------	-------

HAY HANDLING ATTACHMENTS

Bucket Mount



BBSF20



CBSF2000



CBSF3028

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
BBSF20	2,000 Lb. Bolt-on Bucket Bale Spear Single tapered forged tine for use with tight center bales	68 lbs.	\$465
CBSF2000	2,000 Lb. Clamp-on Bucket Bale Spear Chain and turnbuckle system. 42" long Single tapered forged tine for use with tight center bales.	79 lbs.	\$549
CBSF2028	3000 Lb. Clamp-on bucket Uses chain and turnbuckle system. Two 42" tapered forged spears	102 lbs.	\$849
CBSF3028	4000 Lb. Clamp-on bucket THREE bales spear. Uses 2 chains & turnbuckle system. Three 42" tapered forged spears	185 lbs.	\$1229

HAY HANDLING ATTACHMENTS

Front Loader or Skid Steer



FLBS3000



FLBS2200

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
FLBS2200	2200 lb. rated Single Loader Bale Spear Single 42" tapered forged spear. Requires Optional Interfacing. Quick Attach Brackets (not included)	121 lbs.	\$665
FLBS3000	3000 lb. rated Dual Loader Bale Spear Two 42" forged tapered Spears. Requires Optional Interfacing Quick Attach Brackets (not included)	136 Lbs.	\$789



SSB3000

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
SSB3000	Skid Steer Double Bale Spear. Rated at 3000 lbs. Bolt-in tapered spears have usable length of 42". Designed to fit "universal" skid steer quick attach system	146 lbs.	\$899

HAY HANDLING ATTACHMENTS

3 Pt. Hitch Only



BSF1523



HHU2045

BALE SPEAR

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
BSF1523	1,800 Lb. 3 pt. Bale Spear Cat. 1 & 2. Single spear is 44" tapered forged spear for excellent penetration into the bale, w/welded balance spears.	60 lbs.	\$350

HAY HANDLER / BALE UNROLLER

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
HHU2045	2,000 Lb. 3 Pt. Hay Handler/Unroller 4' to 5' width & up to 6' diameter bales. Cat. 1, 2 & 3. 3 Narrow Quick Hitch. Use 2.5" x 8" Hydraulic Cylinder (Not included.)	310 lbs.	\$1469

HAY HANDLING ATTACHMENTS

Tractor Loader & Skid Steer Mount Bale Squeeze



GLBH2072



SSBH2072



GLBS48

The GLBH2072/SSBH2072 Bale Squeeze for up to 2200 lb. features smooth curved clamping arms to prevent puncturing wrapped bales, yet securely clamping 4' to 6' bales during transport. Available in Universal Skid Steer quick attach and Euro/Global/Alo quick attach.

The GLBS48/SSLBS48 NEW Large Square Bale Squeeze for handling large wrapped or unwrapped square 44" to 96" in length bales up to 2500 lbs. Available in Universal Skid Steer quick attach and Euro/Global/Alo quick attach.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
GLBS2072	Round Bale Squeeze with Euro/Global/Alo Quick Attach. Includes hydraulic cylinder, less hydraulic hoses	525 lbs.	\$3679
SSBH2072	Round Bale Squeeze with Universal Skid Steer Quick Attach. Includes hydraulic cylinder, less hydraulic hoses	572 lbs.	\$3725
GLBS48	Large Square Bale Squeeze with Euro/Global/Alo Quick Attach. Includes hydraulic cylinder, less hydraulic hoses	680 lbs.	\$4270
SSLBS48	Large Square Bale Squeeze with Universal Skid Steer Quick Attach. Includes hydraulic cylinder complete with hydraulic hoses and couplers	665 lbs.	\$4419

HAY HANDLING ATTACHMENTS RW Spin Off



Designed as an efficient hay management tool for moving and feeding round bales. The Spin Off hydraulically rotates the bale, unwinding the hay into a windrow.

- * Eliminates wasted hay, only unroll what cattle will clean up in one hour
- * Easy operation from cab of tractor or skid steer
- * 3 Pt. hitch, front tractor loader or skid steer mount available
- * Hydraulically driven for better operator control
- * Rotates in both directions for easy feeding
- * Cushion valve in the motor provides protection for hydraulic components
- * 44" forged tapered spear
- * GPM Requirement 8-10 GPM. Min. 1500 PSI
- * 3 pt. & skid steer models include hyd. hoses, tractor loader mount, less hyd. hoses. Less hyd. couplers

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
FSO906	3 Pt Hitch Cat II/III Can be converted to Cat 1 with bushings & Cat 1 pins, (not included). Includes 2 hyd hoses, less couplers	250 lbs.	\$3175
FLSO907	Front tractor loader mount Less hyd hoses, less loader mounting brackets Optional brackets for most loader makes available	370 lbs.	\$3489
SSSO908	Skid Steer Mount Includes "Universal" skid steer quick attach bracket. Includes 2 hyd hoses (less couplers)	325 lbs.	\$3799

POTATO Planter, Hiller & Digger



This unique implement will do all three tasks with the greatest of ease. Attach the seat and rear cover board and plant your potatoes with ease. In mid-season bolt on the 18" sweep and hill the potatoes. At harvest time, go down the centre of the row with the sweep and watch the potatoes roll out on either side. Works like a dream.

- * **Cat. 1 3 Pt. hitch**
- * **HP Requirements: 25**

MODEL	DESCRIPTION	LIST PRICE
1700166	3-in-1 Potato Planter, Hiller and Digger	\$875

3 PT. MOLDBOARD PLOWS



6214



6112

as shown with optional
MP080017 depth gauge kit,
MP080018 coulter blade kit

These 3 Pt. hitch Cat.1 moldboard plows are ideal for the small acreage plowing. For sub compact and compact tractors. Made from heavy 1" x 4" steel bar with replaceable shares and moldboards. Optional depth control and coulter kits available.

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
6112	One 12" Bottom Plow	290 lbs.	\$809
6114	One 14" Bottom Plow	300 lbs.	\$829
6214	Two 14" Bottom Plow	490 lbs.	\$1379
6216	Two 16" Bottom Plow	520 lbs.	\$1399

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
MP080017	Depth Gauge Kit	\$195
MP080018	Coulter Blade Kit	\$219

One Coulter Blade Kit Required per Bottom

PACKERS 3 Pt.



- * Designed for 40 to 80 HP tractors
- * 3 Pt hitch Cat. I - 6', Cat. I / II - 8' & 12'
- * Heavy duty 4" square tube steel main frame
- * 16" cast iron sprocket packer wheels
- * Heavy duty 1-1/8" gang axle wth ball bearings
- * Parking stands

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
BCP1816	6' working width packer	1035 lbs.	\$3999
BCP2416	8' working width packer	1300 lbs.	\$5145
BCP3616	12' working width packer	1885 lbs.	\$7575

POST HOLE DIGGERS

3 Pt. PTO & Hydraulic



500WS PHD



720 PHD



624H PHD



Fish Tail Point



102165
Parking stand



925 PHD



DFK50-70-90



924H PHD



824H PHD

POST HOLE DIGGERS

3 Pt. PTO & Hydraulic



- * Heavy duty tubular steel stock on yoke & booms
- * Large 2" round output shaft has two bolt auger connection
- * Shear pin protected & shielded PTO drivelines.
- * Down force kits available
- * 3 position boom adjustment on PTO models
- * 5 year limited gearbox warranty
- * Trouble free tapered roller bearings & spring loaded seals
- * Choose from a large selection of 9", 12" by 30" long, single flight and 6" to 30' x 42" long, double flight all with Fish Tail auger points
- * Parking Stands available.
- * 924HC/EURO fits directly onto ALO loaders
- * Model 624H Includes hydraulic hoses.
- * Models 724H, 824H, 924H, 924HC/EURO. Do Not Include hydraulic hoses

MODEL	GEAR RATIO	HITCH SIZE	AUGER LENGTH	AUGER USAGE	WEIGHT	LIST PRICE
3 PT. HITCH 540 RPM PTO						
300	3:1	Cat. 0	30"	9" - 12"	149 lbs.	\$1020
500WS	3:1	Cat. 1 and 2	42"	6" - 12"	160 lbs.	\$1045
720	3.18:1	Cat. 1 and 2	42"	6" - 24"	206 lbs.	\$1335
925	4.1:1	Cat. 1 and 2	42"	6" - 30"	210 lbs.	\$1679
HYDRAULIC DRIVE, Requires 10-20 gpm @ 1500-3000 psi						
624H	3Pt. hitch Cat 1 & 2 (inc. hyd hoses)			6" - 24"	182 lbs.	\$2485
724H	Loader (bolt-on side plate)			6" - 24"	127 lbs.	\$2275
824H	Loader (clamp-on)			6" - 24"	196 lbs.	\$2475
924H	Skid steer quick attach mount			6" - 24"	210 lbs.	\$2349
924HC	ALO loader mount			6" - 24"	220 lbs.	\$2280

AUGERS

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
9SF	9" Single flight 30" long	25 lbs.	\$229
12SF	12" Single flight 30" long	28 lbs.	\$235
6HDDF	6" Double flight 42" long	32 lbs.	\$279
9HDDF	9" Double flight 42" long	47 lbs.	\$315
12HDDF	12" Double flight 42" long	54 lbs.	\$365
14HDDF	14" Double flight 42" long	76 lbs.	\$439
18HDDF	18" Double flight 42" long	98 lbs.	\$670
24HDDF	24" Double flight 42" long	128 lbs.	\$875
30HDDF	30" Double flight 42" long	190 lbs.	\$1125

OPTIONS:

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
170705	12" Auger Extension (extends 42" augers to 54")	16 lbs.	\$249
DFK50	*Down force kit for model 500WS	39 lbs.	\$650
DFK70	*Down force kit for model 720, 624H	40 lbs.	\$650
DFK90	*Down force kit for model 925	42 lbs.	\$650
*Kit contains hydraulic cylinder & hoses			
102160	Parking stand for model 300	11 lbs.	\$145
102165	Parking stand for model 500/720	12 lbs.	\$165
102170	Parking stand for model 925	13 lbs.	\$180

Weights indicated are base machine weight, not shipping weight

POST DRIVERS

3 Pt. Hitch



Hydraulic Adjust



Manual Adjust

Installing new fencelines? Replacing old ones? **WORKSAVER** post drivers are built to last with quality features designed to improve operator convenience, versatility, production and performance in all kinds of conditions. Available with either manual adjustment crank or hydraulic cylinder controlled for post alignment

WITH MANUAL ADJUSTMENT

	HPD16	HPD22Q	HPD26Q
Maximum post size	5" x 9'	8 3/4" x 10'	11" x 10'
Impact at full stroke	32,000 lbs.	80,000 lbs.	110,000 lbs.
Impact at half stroke	16,000 lbs.	40,000 lbs.	55,000 lbs.
Hydraulic requirements	3 - 4 gpm	6 - 8 gpm	12 gpm
Minimum tractor size	20 - 22 HP	30 - 35 HP	50 - 55 HP
Hitch Type	Cat. I or II	Cat. I or II	Cat. II
Weight	600 lbs.	795 lbs.	N/A
LIST PRICE	\$4275	\$5899	N/A

WITH HYDRAULIC ADJUSTMENT

	HPD16SHC	HPD22QSHC	HPD26QSHC
Tilt Adjustment	- Front/Back 17° each way from vertical	- Side/Side 20° each way from vertical	
# of Tilt Cylinders	-Two (2) 3" x 6"		
Weight	875 lbs.	1035 lbs.	1215 lbs.
LIST PRICE	\$7299	\$8899	\$10,789

POST DRIVERS

Skid Steer



Hydraulic Adjust



Manual Adjust



Installing new fence lines? Replacing old ones? Setting post for livestock pens, feedlots, vineyards, etc. save time and eliminate backbreaking labour with a **WORKSAVER** Skid steer Post Driver.

WITH MANUAL ADJUSTMENT & UNIVERSAL STYLE QUICK ATTACH BRACKETS

(SPECIAL Order, not stocked)

	HPD16MSS	HPD22QMSS
Maximum post size:	5" x 9'	8-3/4" x 10'
Impact at full stroke:	32,000 lbs.	80,000 lbs.
Impact at half stroke:	16,000 lbs.	40,000 lbs
Minimum hydraulic req.:	3 - 4 gpm	6 - 8 gpm
Mount Type	Skid Steer	Skid Steer
Weight:	678 lbs.	828 lbs.
LIST PRICE	\$5379	\$6999

WITH HYDRAULIC ADJUSTMENT & UNIVERSAL STYLE QUICK ATTACH BRACKET

(SPECIAL Order, not stocked)

	HPD16HSS	HPD22QHSS	HPD26QHSS
Tilt Adjustment	- Front/Back 17° each way from vertical - Side/Side 20° each way from vertical		
# of Tilt Cylinders	-Two (2) 3" x 6"		
Maximum post size	5" x 9'	8-3/4" x 10'	11" x 10'
Impact at full stroke	32,000 lbs.	80,000 lbs.	110,000 lbs.
Impact at half stroke	16,000 lbs.	40,000 lbs.	55,000 lbs.
Hydraulic requirements	3 - 4 gpm	6 - 8 gpm	12 gpm
Mount Type	Skid Steer	Skid Steer	Skid Steer
Weight	950 lbs.	1245 lbs.	1429 lbs.
LIST PRICE	\$8469	\$9999	\$11,959

NOTE: Return line package required depending on make and model of skid steer (order extra), please advise model of skid steer when ordering post driver return line.

SINGLE SHANK FURROWER & SUB SOILER

3 Pt. Hitch



BSM100



R-130

TAR RIVER IMPLEMENTS offers a combination implement, that will dig a furrow or by changing the bottom furrow shovel to a sub soiler point can be used to fracture the soil for better air and water penetration. For tractors up to 30 HP

WorkSaver offers a heavy duty 30" single shank sub-soiler/ripper for tractors 30 – 50 HP



BSM100

- * CAT. I 3 Pt. Hitch
- * Adjustable Digging Depth
- * Heavy Duty Frame
- * Shear pin protected
- * c/w Standard 14" Furrower Shovel
- * c/w Reversible Sub Soiler Point



R130

- * CAT. I/II 3 Pt. Hitch w/ 7/8" Pins
- * 30" Long Shank
- * 31" Wide Frame
- * Shear pin protected
- * c/w Reversible Point

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
BSM100	Combo Furrower / Sub Soiler	88 lbs.	\$399
R130	Heavy duty Sub Soiler / Ripper	218 lbs.	\$1259

SUB-SOILERS

3 Pt. Hitch



These quality constructed one, two and three shank sub-soilers are constructed of 5" x 7" heavy wall steel tubing for maximum strength. The shanks are constructed of T1 steel, 1-1/4" thick with a replaceable heat treated point and are shear pin protected. Parking stands are standard equipment. Designed for 30 - 130 HP tractors.

MODEL	SHANKS	WEIGHT	FRAME LENGTH	SHANK SPACING	LIST PRICE
1S28T1	(1) 28"	243 lbs.	26"	0"	\$1859
2S2860T1	(2) 28"	609 lbs.	60"	52"	\$3635
2S2880T1	(2) 28"	655 lbs.	80"	72"	\$3765
3S3290T1 Dble. Bar	(3) 32"	1264 lbs.	90"	Adjustable	\$6239

When using sub-soilers in rocky conditions, warranty will be considered for manufacturers defects only, not for damage from sub-terranean obstacles.

DISC HARROWS

"THE" Series

3 Pt. Hitch



The Monroe Tufline THE series 3 Pt. hitch disc harrows are designed for 25HP to 35HP tractors. Available in 5'6", 6'4" & 6'8" cutting widths with category I 3 Pt. hitch. 3" square tube frame, 1" square high strength steel gang axles, 7 1/2" or 9" blade spacing & 18" notched disc blades. Sealed gang bearings, lever adjusting gang angles. Optional blade scrapers are available.

- * 3" Square steel tube frame
- * Cat I, 3 Pt. hitch
- * 18" Notched disc blades
- * 7 1/2" or 9" blade spacing
- * Adjustable gang angle
- * 1" High strength gang axle
- * Sealed flange mounted gang ball bearings

MODEL	# BLADES	BLADE SPACING	WIDTH	WEIGHT	LIST PRICE
1THE71618BF	16	7 1/2"	5'6"	659 lbs.	\$2629
1THE72018BF	20	7 1/2"	6'8"	732 lbs.	\$2950
1THE91618BF	16	9"	6'4"	718 lbs.	\$2739
1THE971818BF	18	9" Front 7 1/2 Rear	6'8"	736 lbs.	\$2869

OPTIONAL SCRAPER KITS

MODEL	FITS MODEL	WEIGHT	LIST PRICE
RSK716L	1THE716	65 lbs.	\$579
RSK720L	1THE720	82 lbs.	\$659
RSK916L	1THE916	72 lbs.	\$595
RSK9718L	1THE9718	80 lbs.	\$619

OFFSET DISC "TLO" Series 3 Pt. Hitch



The Monroe Tufline TLO series 3 Pt. hitch offset discs are designed for 25 to 75HP tractors. Available in 4'6" to 8'4" cutting widths with category I or II 3 Pt. hitch. Units come with 3" square tube frame, 1 1/8" square high strength steel gang axles, 9" blade spacing, 20" disc blades & sealed gang bearings. Unit also has pin adjusting gang angles and front to rear leveling for side draft control. Optional blade scrapers are available.

- * 3" Square steel tube frame
- * Cat I or II, 3 Pt. hitch
- * 1 1/8" High strength gang axle
- * 9" Blade spacing
- * Adjustable gang angle
- * Pressure control levelling
- * 20" Notched disc blades
- * Sealed gang ball bearings

MODEL	# BLADES	CUTTING WIDTH	WEIGHT	LIST PRICE
TLO91220	12	4'6"	710 lbs.	\$3035
TLO91420	14	5'3"	996 lbs.	\$4349
TLO91620	16	6'	1101 lbs.	\$4669
TLO91820	18	6'8"	1185 lbs.	\$4980
TLO92020	20	7'6"	1250 lbs.	\$5225
TLO92220	22	8'4"	1318 lbs.	\$5489

OPTIONAL SCRAPER KITS

MODEL	FITS MODEL	WEIGHT	LIST PRICE
SLO912	TLO912	144 lbs.	\$805
SLO914	TLO914	156 lbs.	\$855
SLO916	TLO916	192 lbs.	\$895
SLO918	TLO918	207 lbs.	\$950
SLO920	TLO920	224 lbs.	\$1015
SLO922	TLO922	250 lbs.	\$1069

DISC HARROWS

"TW6" Series

Pull Type

Tufline



The TW6 Series Tandem Discs are heavy engineered discs designed for primary tillage applications. The TW6 is available in 10', 12', 13', & 15' working widths. Constructed of heavy 6" x 4" and 4" square steel frames. Blade spacing available in 9" or 10-1/2" with 24" plain or notched 6 mil disc blades on 1-1/2" cold drawn square gang axles. Gangs are mounted with triple sealed ball bearings (optional regreaseable bearings available) in a ductile cast trunnion housing with hi-strength tube style or shock flex (c-shank) gang hangers. All units offer adjustable gang cutting angle, front to rear leveling system and depth control.

- * **Heavy 6" x 4" and 4" Square Steel Frame**
- * **Dual Wheel Carriage with 4 – 9.5L x 15 6 Ply Implement tires**
- * **Front to Rear Leveling System**
- * **Depth Control System**
- * **Adjustable Gang Cutting Angle**
- * **1-1/2" Square cold Drawn Steel Gang Axle**
- * **9" or 10-1/2" Blade Spacing**
- * **24" 6 mil Plain or Notched Disc Blades (Customer Choice)**
- * **Triple Sealed Trunnion Mount Gang Ball Bearings**
- * **Available with Tube Style or Shock Flex Gang Hangers**
- * **Includes Implement Tongue Jack, Safety Chain,**
- * **Includes 4"X 8" Hydraulic Cylinder, Set of Hydraulic Hoses**
- * **Options Available**
 - Regreaseable Gang Ball Bearings**
 - Heavy Adjustable Blade Scrapers**

DISC HARROWS

"TW6" Series

Pull Type



9" SPACING

MODEL	BLADES	# OF BRGS	WIDTH	TUBE WT. (LBS)	TUBE LIST	SHOCK FLEX WT. (LBS)	SHOCK FLEX LIST
TW692824	(28) 24"	8	10' 6"	4401 lbs	\$17,290	4869 lbs	\$18,860
TW693224	(32) 24"	8	12'	4794 lbs	\$18,699	5212 lbs	\$20,175
TW693624	(36) 24"	12	13' 4"	5158 lbs	\$20,625	5576 lbs	\$22,879
TW694024	(40) 24"	12	15'	5539 lbs	\$22,419	5975 lbs	\$24,869

10-1/2" SPACING

MODEL	BLADES	# OF BRGS	WIDTH	TUBE WT. (LBS)	TUBE LIST	SHOCK FLEX WT. (LBS)	SHOCK FLEX LIST
TW6102424	(22) 24"	8	10' 6"	4279 lbs	\$16,045	4883 lbs	\$17,555
TW6102824	(28) 24"	8	12'	4570 lbs	\$17,999	4886 lbs	\$19,499
TW6103224	(32) 24"	12	13' 4"	4970 lbs	\$19,825	5324 lbs	\$21,999
TW6103624	(36) 24"	12	15'	5319 lbs	\$21,799	5737 lbs	\$23,999

Add "SF" to model # when ordering disc equipped with shock flex gang hangers

TW6 SERIES SCRAPER KITS

9" SPACING

MODEL	USED ON	WEIGHT (LBS.)	LIST PRICE
SK928/6	TW6928	320	\$1399
SK932/6	TW6935	353	\$1545
SK936/6	TW6936	441	\$1665
SK940/6	TW6940	479	\$1799

10-1/2" SPACING

MODEL	USED ON	WEIGHT (LBS.)	LIST PRICE
SK1024/6	TW61024	298	\$1245
SK1028/6	TW61028	326	\$1420
SK1032/6	TW61032	406	\$1549
SK1036/6	TW61036	448	\$1675

TW6 SERIES OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
T703-18	(Pair) Outrigger kit (Furrow Filler)	\$335
11476	Balk breaker with point	\$305
13188	Regreasable gang ball bearings	\$36

Weights indicated are base machine weight, not shipping weight

OFFSET DISC "42" Series



- * Includes 4" x 8" Hydraulic Cylinder with hydraulic hoses (less coupler plugs)
- * Implement Tongue Jack, Safety Chain, SMV Sign
- * Standard with Notched Disc Blades
- * HP Requirements: 60-120 (Approx. 10 HP per Ft.)
- * Tongue and yoke system for side draft
- * Gang angles adjust by turnbuckles
- * Triple sealed ball bearings in trunnion mount
- * Dual wheels on all models includes 9.5L x 15 6 ply implement tires
- * 24" and 26" disc blades - 1/4" thick
- * Shock flex gang hangers for rocky soil conditions
- * 6" x 4" heavy wall tube frame
- * 1-1/2" RC square cold drawn axle
- * Front and rear levelling system

OPTIONAL EQUIPMENT

- * Blade scrapers, Plain (Smooth) Blades, Regreasable Gang Bearings, Furrow Filler Kit (see page 155 OPTIONS)

9" SPACING

MODEL	BLADES	# OF BRGS	WIDTH	SHOCK FLEX WT. (LBS)	SHOCK FLEX LIST
42/91824SF	(18) 24"	8	6' 8"	3907	\$16,539
42/91826SF	(18) 26"	8	6' 8"	4038	\$17,099
42/92024SF	(20) 24"	8	7' 8"	4000	\$16,999
42/92026SF	(20) 26"	8	7' 8"	4166	\$17,665
42/92224SF	(22) 24"	8	8' 4"	4250	\$17,539
42/92226SF	(22) 26"	8	8' 4"	4396	\$18,240
42/92424SF	(24) 24"	8	9'	4540	\$17,959
42/92426SF	(24) 26"	8	9'	4672	\$18,729
42/92824SF	(28) 24"	12	10' 4"	4868	\$19,819
42/92826SF	(28) 26"	12	10' 4"	5047	\$21,459
42/93224SF	(32) 24"	12	12' 3"	5161	\$21,829
42/93226SF	(32) 26"	12	12' 3"	5344	\$22,729
42/93624SF	(36) 24"	14	13' 3"	5311	\$23,799
42/93626SF	(36) 26"	14	13' 3"	5655	\$24,829

OFFSET DISC

"42" Series



10-1/2" SPACING

MODEL	BLADES	NO. OF BRGS.	WIDTH OF CUT	SHOCK FLEX WGT. (LBS.)	SHOCK FLEX LIST
42/101824SF	(18) 24"	8	8'	4002	\$16,735
42/101826SF	(18) 26"	8	8'	4010	\$17,299
42/102024SF	(20) 24"	8	9'	4228	\$16,999
42/102026SF	(20) 26"	8	9'	4360	\$17,685
42/102224SF	(22) 24"	8	9' 10"	4394	\$17,599
42/102226SF	(22) 26"	8	9' 10"	4526	\$18,299
42/102424SF	(24) 24"	8	10' 6"	4649	\$18,429
42/102426SF	(24) 26"	8	10' 6"	4807	\$19,199
42/102824SF	(28) 24"	12	12'	5164	\$21,430
42/102826SF	(28) 26"	12	12'	5314	\$22,325
42/103224SF	(32) 24"	12	13' 9"	5278	\$21,999
42/103226SF	(32) 26"	12	13' 9"	5500	\$22,999

42 Series SCRAPER KITS

9" SPACING

MODEL	USED ON	WEIGHT (LBS.)	LIST PRICE
OSK42/918	42/918	276	\$979
OSK42/920	42/920	294	\$1069
OSK42/922	42/922	325	\$1145
OSK42/924	42/924	359	\$1209
OSK42/928	42/928	460	\$1429
OSK42/932	42/932	527	\$1609
OSK42/936	42/936	580	\$1739

10-1/2" SPACING

MODEL	USED ON	WEIGHT (LBS.)	LIST PRICE
OSK42/1018	42/1018	277	\$1019
OSK42/1020	42/1020	303	\$1099
OSK42/1022	42/1022	330	\$1135
OSK42/1024	42/1024	352	\$1199
OSK42/1028	42/1028	410	\$1459
OSK42/1032	42/1032	527	\$1565

42 SERIES OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
T703-1/2-20	Furrow Filler	\$195
13188	Additional charge for regreasable gang brgs. 1-1/2"	\$36

TO PRICE AN OFFSET DISC MAKE SURE YOU HAVE PRICED:

1. Scraper kit (If Required)
2. Any applicable options from the option list
3. Remember your spacing - 9" or 10-1/2" available
4. Order blades plain, notched, or a combination

TRACTOR CANOPIES JUNIOR

BARE-Co



B3580 Shown



B3581 Shown



The **BARE-Co** junior canopy is moulded from virtually indestructible flexible U.V. stabilized polyethylene. The canopy is 34" wide x 47" long and is designed moulded to hug modern hoop type ROPS frames. Available in standard colours, universal mounting kit to fit most types of ROPS frames, order extra.

MODEL	DESCRIPTION	WEIGHT	PRICE
B2581	White Canopy	20 lbs.	\$415
B2582	Green Canopy	20 lbs.	\$415
B2583	Orange Canopy	20 lbs.	\$415
B2584	Blue Canopy	20 lbs.	\$415
B2585	Red Canopy	20 lbs.	\$415
B2586	Yellow Canopy	20 lbs.	\$415
B3580	Mounting Kit Mounts canopy to HOOP, CURVED or SQUARE TOP Both rigid or folding up to 30" wide with leg thickness up to 3-3/16" x 2"	17 lbs.	\$190
B3581	Mounting Kit Mounts the canopy OVERWIDTH ROPS frames with a width of more than 30" wide, with a leg thickness from 2" x 2" to 2" x 4"	13 lbs.	\$145

TRACTOR CANOPIES SENIOR

BARE-Co



B3600 Shown



B2565 Shown

The **BARE-Co** standard canopy is moulded from virtually indestructible flexible U.V. stabilized polyethylene. The canopy is 45" wide x 60" long and is designed moulded to hug modern hoop type ROPS frames. Available in standard colours, universal mounting kit to fit most types of ROPS frames, order extra.

MODEL	DESCRIPTION	WEIGHT	PRICE
B2570	White Canopy	29 lbs.	\$515
B2571	Green Canopy	29 lbs.	\$515
B2572	Orange Canopy	29 lbs.	\$515
B2573	Blue Canopy	29 lbs.	\$515
B2580	Red Canopy	29 lbs.	\$515
B3600	Mounting Bracket Mounts the canopy to any folding or rigid hoop type ROPS frame up to 41-1/2" wide, with leg thickness up to 3-3/16" x 2"	17 lbs.	\$205
B2565	Mounting Bracket Mounts the canopy to overwidth ROPS frames, crossbar or leg width more than 41-1/2", leg thickness from 2" x 2" to 2" x 4"	13 lbs.	\$165
B4620	Mounting Bracket Mounts the canopy to ROPS frames up to 41-1/2" wide with leg thicknesses of 4" x 4", 5" x 2" or 6" x 2"	21 lbs.	\$299



AMAZONE

The CATROS compact disc harrows from AMAZONE make work go by twice as quick ! Being easy to pull, these machines allow for high speed travelling but still leave a top class quality of work.

High work rates, low fuel consumption and low wear costs are the special strengths of the CATROS. They are ideally suited for a fast, shallow and intense mixing stubble work and operate blockage free even in high amounts of stubble. The incorporation of straw and stubble, the loosening up of grassland, seedbed preparation and the incorporation of organic manures offers additional flexibility in use. The broad range includes mounted and trailed machines in working widths from 3 meters to 7.5 meters.



ONLY AVAILABLE THROUGH STOCKING DEALERS




AMAZONE

QUICK HITCHES



WORKSAVER quick hitches are built for fast, safe and easy connection and disconnection of 3 Pt. implements. The **WORKSAVER** quick hitches fit most Category 1, 2 and 3 Pt. hitch tractors.

- A** Inside Hooks
- B** Outside Hooks
- C** Centerline Distance of lower pin to upper pin
- D** Pocket sized for 1-7/16" pins or bushings

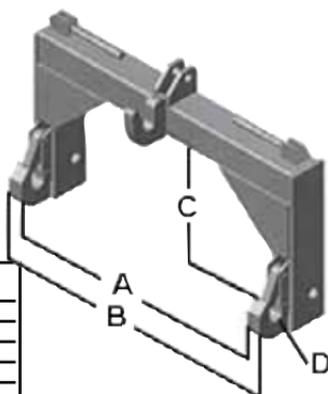

MODEL	QUICK HITCH SPECIFICATIONS		
	A	B	C
QH10178	25.75"	29.50"	14.50" - 17.25"
QH102	32.75"	36.25"	14.88"
QH107HD	32.50	37.75"	14.88"
QH1023	38.25"	43.15"	18.88"
QH103	38.25"	43.50"	18.88"
QH106N	32.63"	37.00"	19.00"

- * High strength tubing for torsional strength
- * Over-center spring loaded latch mechanism provides positive lock yet easy equipment release
- * Solid frame cut parts for long life
- * Reinforced at known wear points
- * Non-rotating adapter bushings for wear resistance
- * Rubber handle grips on latch handles
- * Tapered top hitch point bracket for easy hook-up
- * Includes one set adapter bushings with QH101, QH102, QH107HD

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
QH10178	Cat. 1 (up to 50 HP)	76 lbs.	\$489
QH102	Cat. 2 (up to 100 HP)	134 lbs.	\$679
QH107HD	Cat. 2 HD (up to 150 HP)	160 lbs.	\$805
QH1023	Cat. 2 to Cat. 3 Allows use of Cat. 3 implements on tractors with Cat. 2, 3 Pt hitch	185 lbs.	\$959
QH103	Cat. 3 (up to 225 HP)	182 lbs.	\$959
QH106N	Cat. 3 Narrow (up to 225 HP)	176 lbs.	\$959

HYDRAULIC TOP LINK



TLC3110

MODEL	DESCRIPTION	WEIGHT	LIST PRICE
TLC2708	Cat. I, 2" bore x 8" stroke 1-1/8" dia. shaft	18 lbs.	\$429
TLC3110	Cat. II, 3" bore x 10" stroke 1-1/4" dia. shaft	26 lbs.	\$445

Weights indicated are base machine weight, not shipping weight

WELD-ON ATTACHMENT BRACKETS



Easily convert your bucket or other attachments to be used on your skid steer or Euro/Global/Alo loader with a Weld-on plate.

MODEL	DESCRIPTION	PRICE
832540	"Universal" Skid Steer Quick Attach, 1/4" material plate 46 lbs	\$215



MODEL	DESCRIPTION	PRICE
832790	"Universal" HD Skid Steer Quick Attach, 3/8" material plate 96 lbs	\$359



MODEL	DESCRIPTION	PRICE
ALO1	Euro/Global/Alo Two (2) piece weld-on brackets 36 lbs	\$145




Left Hand



Right Hand

MODEL	DESCRIPTION	PRICE
832625	Euro/Global/Alo HD 5/16" material plate 95 lbs	\$489



MODEL	DESCRIPTION	PRICE
835060	John Deere 300/400 Series Loaders, Weld-on plate 70 lbs	\$335



MODEL	DESCRIPTION	PRICE
835065	John Deere 500 Series Loaders, Weld-on plate 83 lbs	\$369



LOADER ADAPTOR BRACKETS



WORKSAVER elevates your tractor's productivity by converting it's loader (depending on make & model) to either "Universal" Skid Steer quick attach or the EURO/GLOBAL/ALO standard quick attach system. Worksaver adapter brackets feature all welded frames for durability, plated latch components for long service life.

Euro/Global/Alo to Skid Steer

MODEL	DESCRIPTION	PRICE
832550	Interfaces with agricultural loaders that use the Euro/Global/Alo attaching system to allow the use of skid steer attachments, 110 lbs	\$979



Skid Steer to Euro/Global/Alo

MODEL	DESCRIPTION	PRICE
835020	Interfaces with skid steer or agricultural loaders that use the "Universal" skid steer attaching system Attachments that mount to Euro/Global/Alo tool carrier, 110 lbs	\$1469



3 Pt. Hitch to "Universal" Skid Steer

MODEL	DESCRIPTION	PRICE
835080	Allows mounting skid steer type attachments to their tractors Will fit both CAT I or II hitches, 145 lbs	\$919



Skid Steer CAT I, 3 Pt. Quick Hitch

MODEL	DESCRIPTION	PRICE
835095	Allows the operator to use CAT 1, 3 Pt hitch non PTO powered implements on a skid steer with "Universal" skid steer quick attach, 148 lbs	\$919



Worksaver has many more loader adapters available, for IH 2250 & 2255 loaders, Case IH L160/LX114/LX116/LX118 series loaders, John Deere 48/58 series, 145/146/148/158 series, 240/245/260/265 series, 300/400/500 series, 600/700 series loaders, Kubota LA350/401/452/852/1251, 1301, 1601 series loaders, Massey Ferguson 232/236/238/246/832/838/848/938/948/1036/1048 series loaders, New Holland 2109/7108/7109/7209/7210/7308/7309/7310/7410 series, 14LA/15LA/16LA/17LA/18LA series loaders. Check with your local dealer for pricing and availability on these and many more.

Weights indicated are base machine weight, not shipping weight

ROTARY BROOMS SKID STEER MOUNT



The WORKSAVER skid steer hydraulically driven rotary broom fits any make and model of skid steer with universal skid steer quick attach mounting. Hydraulic motor rated @ 16GPM continuous operation for maximum brush speed. Optional manual or hydraulic angling kit available. All hydraulic hoses sheathed and routed through integral loops for maximum protection. Flat-faced "connect under pressure" hydraulic couplers standard

- * **Universal skid steer quick attach mounting**
- * **16 GPM hydraulic motor**
- * **4.36 / 1 chain drive ratio to broom for excellent torque**
- * **Heavy duty #60 drive roller chain**
- * **Parking stands**
- * **Step-through mount design for easy in/out of skid steer cab**
- * **Greaseable pivot points for long life**
- * **32" diameter poly or poly/wire brush**
- * **Optional manual or hydraulic angle adjustment kit available**

MODEL	DESCRIPTION	WEIGHT	PRICE
SSMB325P	5'/60" Wide Rotary Broom with Poly Brush	630 lbs.	\$8079
SSMB325PW	5'/60" Wide Rotary Broom with Poly/Wire Brush	630 lbs.	\$8079
SSMB326P	6'/72" Wide Rotary Broom with Poly Brush	730 lbs.	\$8599
SSMB326PW	6'/72" Wide Rotary Broom with Poly/Wire Brush	730 lbs.	\$8599
SSMB327P	7'/84" Wide Rotary Broom with Poly Brush	830 lbs.	\$9485
SSMB327PW	7'/84" Wide Rotary Broom with Poly/Wire Brush	830 lbs.	\$9485

OPTIONS:

	DESCRIPTION	LIST PRICE
610702	Manual Angle Adjustment Kit	\$199
610703	Hydraulic Angle Adjustment Kit	\$619
610940	Hydraulic Angle Adjustment Kit with Electric Hydraulic Solenoid control. For skid steer rotary Brooms used on units equipped with only one set of remotes, inc'ds hyd. cylinder, hoses, valve, & flat faced couplers, Factory Installed	\$2049

ROTARY BROOMS

3 Pt. HITCH PTO



The WORKSAVER 3 Pt. hitch 540 RPM PTO Rotary Broom mounts to any tractor with 540 RPM PTO. Keep your tractor and sweeper busy all year sweeping snow, dirt, thatch, leaves and other debris. Sweeps forward and can wind-row debris, to the front, right or left. If you reverse broom rotation, pulling action cleans thatch with out damaging grass. Mechanical brush drive, with optional manual angle, 30 degrees right or left, or optional hydraulic angle available. Height adjustment chains maintains even operating position. 32" diameter broom is available in poly, or combo 50/50 poly/wire. A double gearbox drive is used for smooth power transmission and low maintenance. Top "T-Shaft" gearbox allows for easy reversal of brush rotation.

- * Cat. 1, 3 Pt. hitch
- * 540 RPM PTO
- * Optional Manual or hydraulic angle
30 degrees right or left
- * Height adjustment chains
- * 32" diameter brush
- * Available in Poly, or 50/50 Poly/Wire brush
- * Double gearbox drive
- * Top "T-Shaft" gearbox allows easy reversal of brush rotation

MODEL	DESCRIPTION	WEIGHT (LBS.)	LIST PRICE
RMB325P	5' Wide rotary broom with poly brush	640 lbs.	\$7539
RMB325PW	5' Wide rotary broom with poly/wire brush	640 lbs.	\$7539
RMB326P	6' Wide rotary broom with poly brush	740 lbs.	\$7629
RMB326PW	6' Wide rotary broom with poly/wire brush	740 lbs.	\$7629
RMB327P	7' Wide rotary broom with poly brush	840 lbs.	\$8625
RMB327PW	7' Wide rotary broom with poly/wire brush	840 lbs.	\$8625

OPTIONS:

MODEL	DESCRIPTION	LIST PRICE
610702	Manual Angle Kit	\$199
610703	Hydraulic Angle Kit with hoses	\$619

Weights indicated are base machine weight, not shipping weight

WWW.FARMFLEET.COM

23703 Wellburn Rd.
St. Marys, ON N4X 1C6
Tel: 519-461-1499
Fax: 519-461-1599

839 McLellans Brook Rd.
New Glasgow, NS B2H 5C5
Tel: 902-755-0858
Fax: 902-755-2362

Email: farmfleet@execulink.com



• Your Local Farm-Fleet Dealer •